
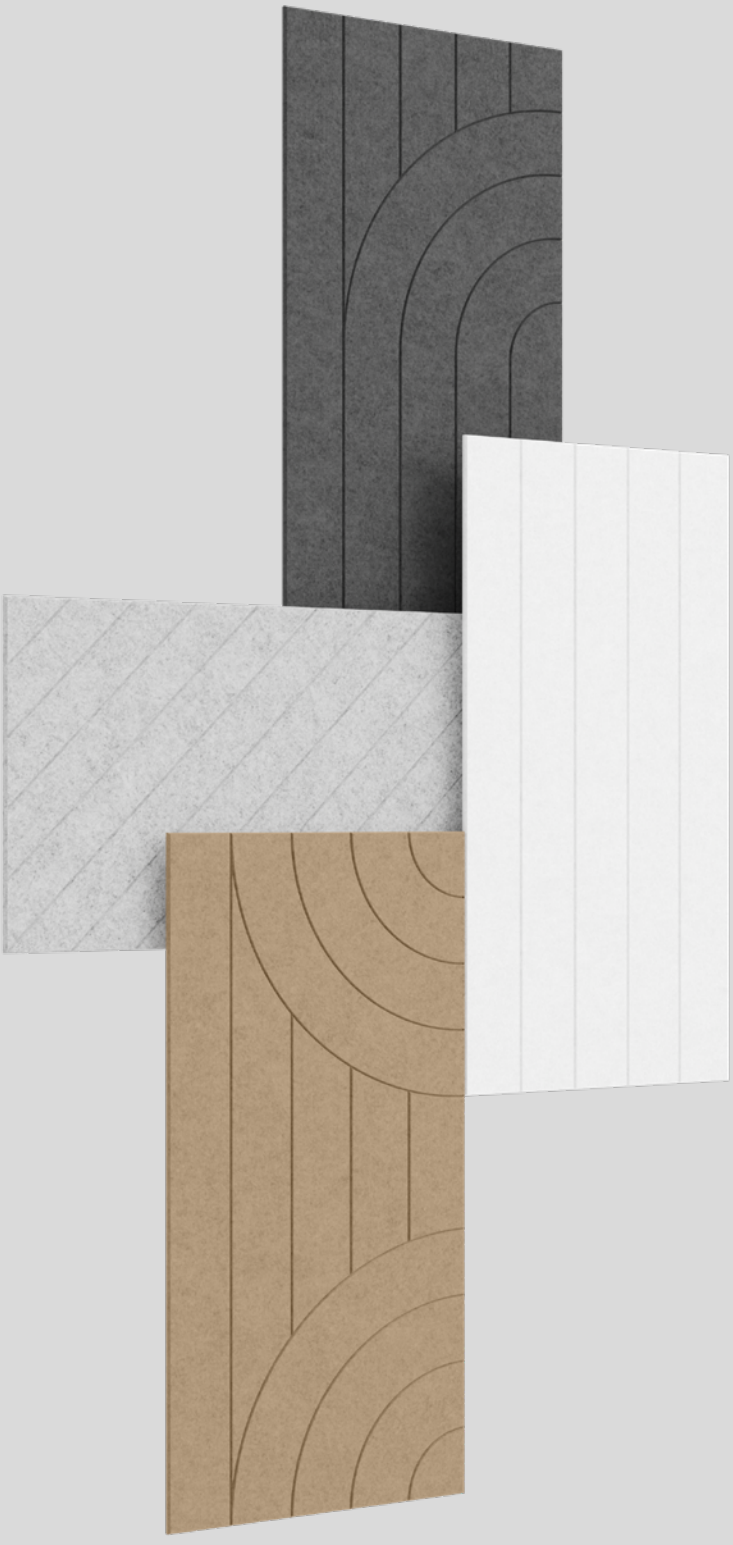


Quickinfo

acoustic wall panel
precise engraved patterns
combinable patterns
various colour options
up to absorption class C
cut on site
12 mm (2400 g/m²)
flame retardant up to B-s1, d0*

Types

1200 × 600

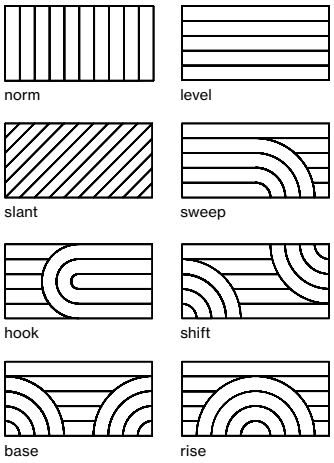

Colours




xilence.xal.com/colours

COVER acoustic

wall panel

EN Acoustically effective wall panel made of 12 mm thick, high quality, at least 75 % recycled PET felt with sound absorbing properties; high quality visual and tactile surface, with clean lines and a defined sense of depth created by the V-cut; all-round 45° chamfer; large selection of colours and patterns that can be mixed and matched; to optimise room acoustics in terms of both function and design

DE Akustisch wirksames Wandpaneel aus 12 mm starkem, hochwertigem, mind. 75 % recycelten PET-Filz mit schallabsorbierenden Eigenschaften; optisch und haptisch hochwertige Oberfläche mit klarer Linienführung und definierter Tiefenwirkung durch V-Cut; umlaufende 45°-Fase; große Auswahl an Farben und miteinander kombinierbaren Mustern; zur funktionalen und gestalterischen Optimierung der Raumakustik




5 mm beveled edge, 30°

5 mm V-cut 60°

Order options

MATERIAL COLOUR	
white	W
marble grey	D
felt grey	G
anthracite	B
black	L
limestone	S
special colours	X



COVER acoustic wall

PANEL

TYPE	L·W·H (mm)	ORDER CODE
norm | set of 2	1200·600·12	091-A00010
level | set of 2	1200·600·12	091-A00110
slant | set of 2	1200·600·12	091-A00210
sweep | set of 2	1200·600·12	091-A00310
hook | set of 2	1200·600·12	091-A00410
shift | set of 2	1200·600·12	091-A00510
base | set of 2	1200·600·12	091-A00610
rise | set of 2	1200·600·12	091-A00710

Mounting accessories

WALL MOUNTING PROFILE SET

TYPE	L·W·H (mm)	ORDER CODE
aluminium profile	1000·40·5	091-7911100
wood profile	950·53·19	091-7911110

for mounting COVER to the wall
for each panel 4 profiels are needed

SCREWS

TYPE	ORDER CODE
set 50 pcs. (for aluminium profile)	091-7911200
set 50 pcs. (for wood profile)	091-7911210

for mounting profile to COVER

*for more details see xilence.xal.com/colours