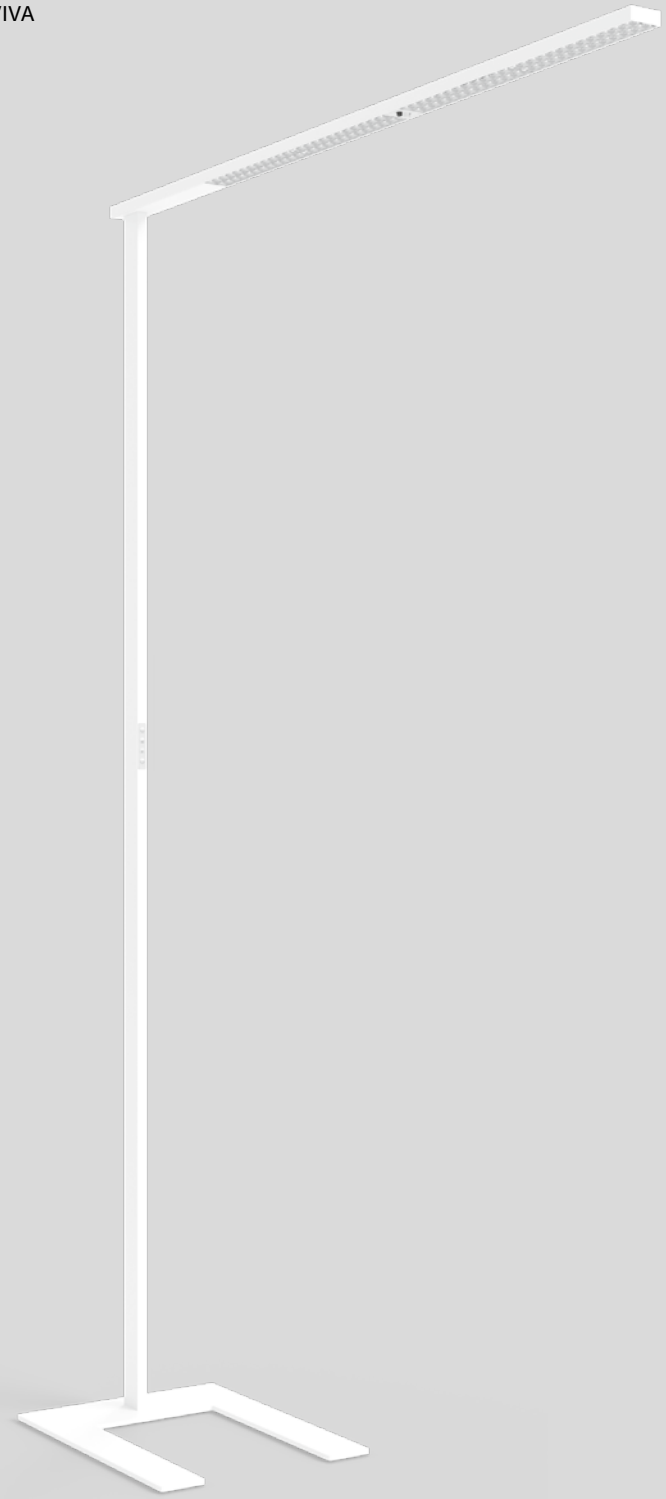


ENVIVA

free standing


EN Free standing luminaire from extruded aluminium profile in angular design; extremely slim design (only 45 × 15 mm); rectangular downpipe; pedestal with recess for table base; surface raw or powder coated; direct / indirect light distribution; direct light component: high quality reflector with micro-faceted, aluminium-vaporised surface and asymmetric radiation characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, separately controllable; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; presence sensor detection range ø4.5m on the floor; incl. connection cable (3m) with safety plug

DE Stehleuchte aus Aluminiumstrangpressprofil in kantiger Ausführung; extrem schlanke Bauform (nur 45 × 15 mm); Standrohr rechteckig; Standfuß mit Ausnehmung für Tischfuß; Oberfläche roh oder pulverbeschichtet; direkt / indirekte Abstrahlcharakteristik; Direktlichtanteil: hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche und asymmetrischer Abstrahlcharakteristik; Indirektlichtanteil mit eigenen Platinen und hochwertiger Linsenoptik für maximale, homogene Deckenaufhellung, separat steuerbar; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schalter im Standrohr verbaut; Anwesenheitssensor-Erfassungsbereich ø4,5 m am Fußboden; inkl. Anschlussleitung (3 m) mit Schutzkontaktstecker

Quickinfo

3000 K, 3500 K, 4000 K
CRI ≥ 80, CRI ≥ 90, 3 SDCM
UGR ≤ 16 / 65° ≤ 1500 cd/m²
up to 14640 lm | 167 lm/W
L90 @ 50 000 h
DALI-2 ESSENTIAL sensor
asymmetric louver

Types



Colours




Light distribution






DIN EN 12464-1
UGR ≤ 16
65° ≤ 1500 cd/m²



asymmetric illumination



ultra slim design



high efficiency up to 167 lm/W



brightness & presence sensor

Order options

MOUNTING

free standing

COLOUR TEMPERATURE

3000 K (CRI ≥ 90)	0
3500 K (CRI ≥ 90)	2
4000 K (CRI ≥ 90)	1
3000 K (CRI ≥ 80)	5
3500 K (CRI ≥ 80)	7
4000 K (CRI ≥ 80)	6

CONTROL


DALI-2 ESSENTIAL sensor (brightness & presence)

MATERIAL COLOUR

pure white RAL 9010	7
jet black RAL 9005	8
aluminium raw / black	1

REFLECTOR COLOUR

chrome	4
black	8



ENVIVA free standing

UGR ≤ 16 | cd/m² ≤1500 | CRI ≥ 90 | 220-240V | X-PERT | X-PERT | brightness | presence

ASYMMETRIC LOUVER | DIRECT / INDIRECT CRI ≥ 80

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
88 W	3000 K	↧3230 / ↥10500 lm	067-0910 :: 7 ◪ ■ X
	3500 K	↧3230 / ↥10500 lm	
	4000 K	↧3440 / ↥11200 lm	

ASYMMETRIC LOUVER | DIRECT / INDIRECT CRI ≥ 90

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
88 W	3000 K	↧2820 / ↥9140 lm	067-0910 :: 7 ◪ ■ X
	3500 K	↧2610 / ↥8470 lm	
	4000 K	↧2820 / ↥9140 lm	

LUMINOUS FLUX value calculated for colour white, reflector chrome