ENVIVA

suspended

EN Luminaire housing from extruded aluminium profile, angular design; extremely slim design (only 45 × 15 mm); no visible screws; surface raw or powder coated; pendant fitting with cable suspension; can be adjusted to any height; incl. feeder cable; linear light inset made of plastic; fitted with single LED light points; good glare reduction due to recessed light point plane; despite this increased efficiency through special lens technology; inserted lenses with wide flood radiation characteristic; or high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with symmetrical light distribution; direct / indirect light distribution; canopy for through wiring (separately available); converter included in canopy; optionally with sensor

DE Leuchtenkörper aus Aluminiumstrangpressprofil, kantige Ausführung; extrem schlanke Bauform (nur 45 × 15 mm); keine sichtbaren Schrauben; Oberfläche roh oder pulverbeschichtet; abgependelt mit Seilabhängung; stufenlos höhenverstellbar; inkl. Einspeiseleitung; linearer Lichteinsatz aus Kunststoff; bestückt mit LED Einzellichtpunkten; gute Entblendung durch zurückversetzte Lichtpunktebene; trotzdem erhöhte Effizienz durch spezielle Linsentechnik; eingesetzte Linsen mit wide flood Abstrahlcharakteristik; oder hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit symmetrischer Lichtverteilung; direkt / indirekte Abstrahlcharakteristik; Baldachin für Weiterverdrahtung (separat zu bestellen); Konverter im Baldachin enthalten; wahlweise mit Sensor

Quickinfo

3000 K, 4000 K
CRI ≥ 80, CRI ≥ 90, 3 SDCM
up to 202 lm/W
UGR ≤ 16 / 65° ≤ 1500 cd/m²
L90 @ 50 000 h
DALI-2, DALI-2 ESSENTIAL sensor
louver, spotline

Types

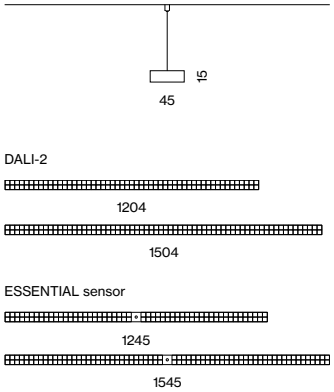

Colours

Light distribution

direct
indirect

up to 202 lm/W
(high efficiency)



DIN EN 12464-1
UGR ≤ 19



sensor
integrated

Order options

COLOUR TEMPERATURE

3000 K (CRI ≥ 80)	5
4000 K (CRI ≥ 80)	6
3000 K (CRI ≥ 90)	0
4000 K (CRI ≥ 90)	1

CONTROL

DALI-2	1
DALI-2 ESSENTIAL sensor (brightness & presence)*	B

*DALI-2 application controller needed

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● aluminium raw / white*	0
● aluminium raw / black**	1

*feeder cable white / cable susp. chrome
**feeder cable black / cable susp. black

LIGHT OPTIC

louver (super wide flood 74°)
spotline (wide flood 67°)

REFLECTOR COLOUR

chrome	4
black	8

SPOTLINE COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● gold	9

CANOPY COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



ENVIVA suspended

UGR ≤ 19 | cd/m² ≤1500 | DALI 1 ADDR. | 850/mA | X-PERT | X-PERT

LOUVER direct / indirect

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
36 W 850 mA	3000 K	↧3180 / ↥3080 lm	1204*	067-0214 X
	4000 K	↧3620 / ↥3500 lm		
36 W 850 mA	3000 K	↧3230 / ↥3100 lm	1504*	067-0215 X
	4000 K	↧3680 / ↥3520 lm		

*sensor version +41 mm; order canopy separately

SPOTLINE direct / indirect

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
38 W 900 mA	3000 K	↧3340 / ↥3280 lm	1204*	067-1214 W
	4000 K	↧3800 / ↥3730 lm		
38 W 900 mA	3000 K	↧3340 / ↥3250 lm	1504*	067-1215 W
	4000 K	↧3810 / ↥3700 lm		

*sensor version +41 mm; order canopy separately

Electrical accessories

CANOPY CEILING 220-240 V AC, 50-60 Hz, ⧈ PC II

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
850 mA | DALI-2	η 89 %	112·112·35	005-261103
900 mA | DALI-2	η 89 %	112·112·35	005-261113

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 80, reflector colour chrome and spotline colour traffic white