

reddot winner 2020

JANE

semi-recessed / surface / suspended


EN Highly flexible light rope made of food grade silicone for creative and decorative design; extremely slim design (only 18 mm diameter); for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools); completely homogeneously illuminated, matt surface; 360° light emission; energy-efficient LEDs with very good colour rendering; optionally with external converter for ceiling installation or suspended in combination with the light rope (available as an accessory)

FR Câble lumineux très flexible en silicone de qualité alimentaire pour un design créatif et décoratif ; forme extrêmement élancée (seulement 18 mm de diamètre) ; pour montage en surface au mur/au plafond ou pour montage suspendu (suspension par câble, réglage de la hauteur sans outil) ; surface mate, éclairée de manière totalement homogène ; diffusion de lumière à 360° ; LED économes en énergie à restitution de couleur élevée ; convertisseur externe en option pour encastrement dans le plafond ou montage suspendu en combinaison avec le câble lumineux (disponible comme accessoire)

Quickinfo

3000 K, 4000 K
CRI ≥ 90, 3 SDCM
up to 1000 lm/m
up to 71 lm/W
L80 @ 50 000 h
non DIM, DALI
IP 40

Types

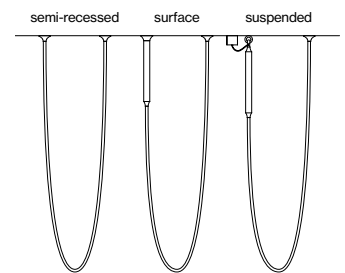

ø18 x 1000-10 000


Canopy colours



Light distribution




360°



many mounting options



dust and insect protection (IP40)



360° light emitting

Order options

COLOUR TEMPERATURE	☐☐
3000K	5
4000K	6


CONTROL	⬆️⬆️
non DIM	1
DALI	3

LENGTH	L
1000 mm	1
2000 mm	2
3000 mm	3
4000 mm	4
6000 mm	6
8000 mm	8
10000 mm	0

MATERIAL COLOUR	☑️
○ pure white RAL 9010	7
● jet black RAL 9005	8



JANE semi-recessed / surface / suspended





LUMINAIRE

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4W/m	3000K	812lm/m	058-651 L::10
	4000K	1000lm/m	

Mounting accessories

MOUNTING ACCESSORIES


TYPE	L-W-H (mm)	ORDER CODE
1 mounting set recessed	ø74-100	058-659021 ☑️
2 mounting set surface	ø74-39	058-659101 ☑️
3 mounting set suspended	ø50/30-135	058-659201 ☑️
4 clip surface (transparent)	15-21-24	058-6591410
5 channel surface (transparent)	1000-21-24	058-6591110
6 mounting ring surface	ø39-9-61	058-659161 ☑️
7 mounting ring suspended	ø39-9	058-659261 ☑️

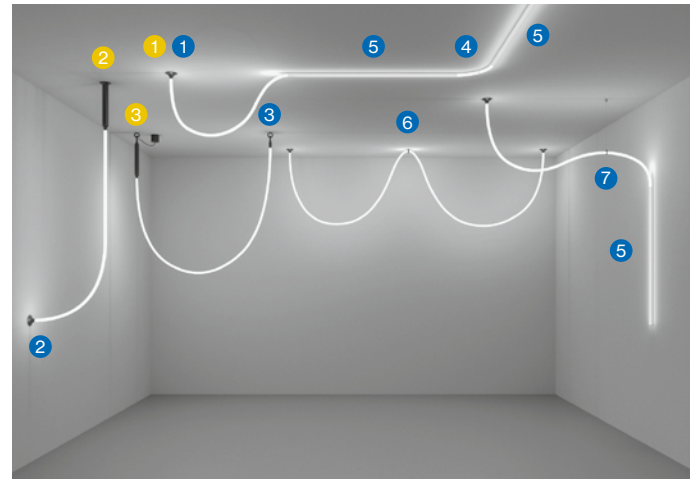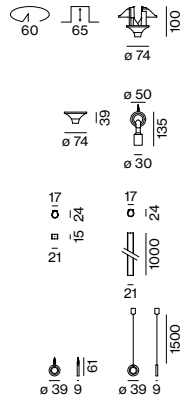


various mounting options with different mounting accessories

Electrical accessories

1 POWER SUPPLY RECESSED 220-240 V AC, 48V, 50-60Hz		
TYPE	L-W-H (mm)	ORDER CODE
100 W recessed <input type="checkbox"/> PC II	350-30-18	002-62134
150 W recessed <input type="checkbox"/> PC II	350-30-18	002-62135
60 W revision opening <input type="checkbox"/> PC II	163-43-32	002-62133
100 W revision opening <input type="checkbox"/> PC II	350-30-18	002-62134
150 W revision opening <input type="checkbox"/> PC II	350-30-18	002-62135
250 W revision opening <input type="checkbox"/> PC II	400-40-22	002-62139
320 W revision opening <input type="checkbox"/> PC I	252-90-44	002-60320
DALI device	120-30-22	058-6599330

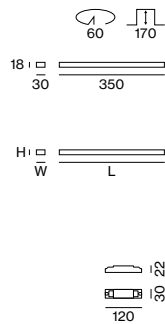

2 POWER SUPPLY SURFACE 220-240 V AC, 48V, 50-60Hz		
TYPE	L-ø (mm)	ORDER CODE
100 W surface <input type="checkbox"/> PC II	584-ø40	058-65912 ☑️☑️
150 W surface <input type="checkbox"/> PC II	584-ø40	058-65913 ☑️☑️



3 POWER SUPPLY SUSPENDED 220-240 V AC, 48V, 50-60Hz		
TYPE	L-ø (mm)	ORDER CODE
100 W suspended <input type="checkbox"/> PC II	639-ø40	058-65922 ☑️☑️
150 W suspended <input type="checkbox"/> PC II	639-ø40	058-65923 ☑️☑️

incl. ceiling canopy and 2000mm power cable

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, rope silicone