

LED STRIP



LED Strips

recessed/surface

EN High quality extruded aluminium channel, angular design; surface anodised or powder coated; available in 3 different light colours; flexible use in recessed or surface mounting; in combination with 3 different covers and compatible with 3 different LED or 2 COB strips


DE Hochwertiges Aluminiumstrangpressprofil, kantige Ausführung; Oberfläche eloxiert bzw. pulverbeschichtet; erhältlich in 3 verschiedenen Farben; flexibel einsetzbar in Einbau- oder Anbaumontage; in Kombination mit 3 verschiedenen Abdeckungen und kompatibel mit 3 verschiedenen LED- bzw. 2 COB-Stripes

Quickinfo


2700 K, 3000 K, 4000 K
CRI ≥ 90, 2 SDCM
up to 136 lm/W
IP 20

Types

Channel



LED/COB Strips



Colours



Light distribution



direct

Order options


COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1

MATERIAL COLOUR


● white aluminium RAL 9006	6
○ white RAL 9003	7
● black RAL 9005	8

Channels




LED CHANNEL RECESSED WITH TRIM

TYPE	L-W-H (mm)	ORDER CODE
recessed with trim	2500-25-13	0 1 1 - 7 3 2 1 1 1



LED CHANNEL RECESSED / SURFACE TRIMLESS S


TYPE	L-W-H (mm)	ORDER CODE
recessed / surface trimless	2500-16-7	0 1 1 - 7 3 0 1 1 1



LED CHANNEL RECESSED / SURFACE TRIMLESS M


TYPE	L-W-H (mm)	ORDER CODE
recessed / surface trimless	2500-16-13	0 1 1 - 7 3 1 1 1 1

LED / COB Strips




LED STRIP LOW POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
9.6 W/m	1090 lm/m	62.5 mm	0 1 1 - 7 0 0 1 1 0




LED STRIP MID POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
14.3 W/m	1585 lm/m	50 mm	0 1 1 - 7 0 1 1 1 0




LED STRIP HIGH POWER free-cutting

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
18.5 W/m	2285 lm/m	5 mm	0 1 1 - 7 0 2 1 1 0



COB STRIP MID POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
11.2 W/m	830 lm/m	55.5 mm	0 1 1 - 7 0 3 1 1 0



COB STRIP HIGH POWER

INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
16.8 W/m	1350 lm/m	29.41 mm	0 1 1 - 7 0 4 1 1 0

Optical accessories

LIGHT OPTIC COVER

TYPE	EFFICIENCY	L (mm)	ORDER CODE
opal	η 60 %	2500	0 1 1 - 7 3 8 1 1 1 0 O
microprismatic	η 65 %	2500	0 1 1 - 7 3 8 1 1 1 0 P
transparent	η 90 %	2500	0 1 1 - 7 3 8 1 1 1 0 T


Mounting accessories

END CAPS

TYPE	PCS	ORDER CODE
LED channel recessed with trim	2	0 1 1 - 7 3 2 9 1 1
LED channel recessed / surface trimless S	2	0 1 1 - 7 3 0 9 1 1
LED channel recessed / surface trimless M	2	0 1 1 - 7 3 1 9 1 1

MOUNTING CLIPS

TYPE	PCS	ORDER CODE
recessed with trim	4	0 1 1 - 7 3 2 9 2 1 6
surface trimless	4	0 1 1 - 7 3 0 9 2 1 6
surface trimless 0-180° adjustable	4	0 1 1 - 7 3 0 9 3 1 6

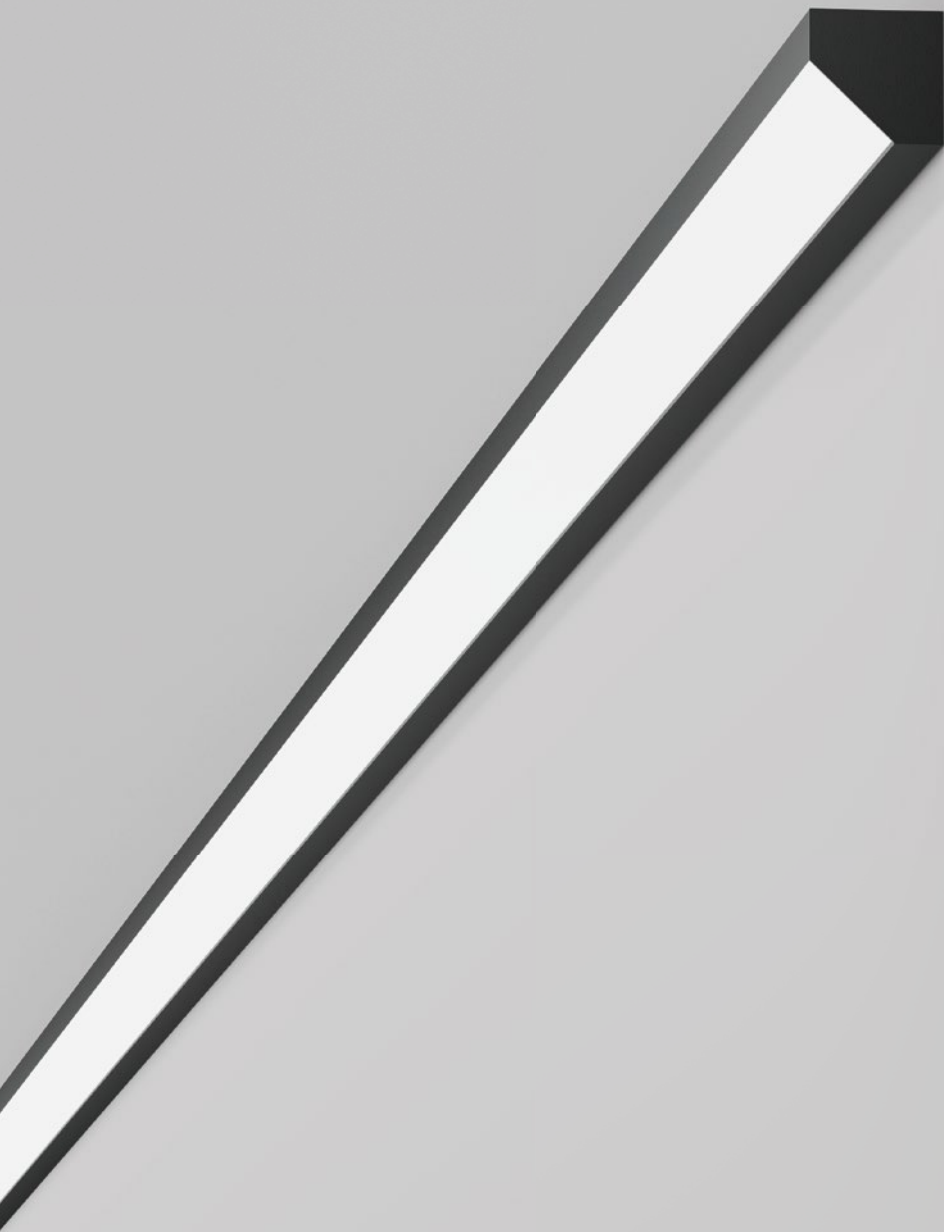

LED Strips

surface

EN High quality extruded aluminium channel, angular design; surface anodised or powder coated; available in 3 different light colours; flexible use in recessed or surface mounting; in combination with 3 different covers and compatible with 3 different LED or 2 COB strips


DE Hochwertiges Aluminiumstrangpressprofil, kantige Ausführung; Oberfläche eloxiert bzw. pulverbeschichtet; erhältlich in 3 verschiedenen Farben; flexibel einsetzbar in Einbau- oder Anbaumontage; in Kombination mit 3 verschiedenen Abdeckungen und kompatibel mit 3 verschiedenen LED- bzw. 2 COB-Stripes

Quickinfo


2700K, 3000K, 4000K
CRI $\geq$ 90, 2 SDCM
up to 136lm/W
IP 20

Types

Channel



LED/COB Strips



Colours




Light distribution



Order options

COLOUR TEMPERATURE	
2700 K	9
3000 K	0
4000 K	1



MATERIAL COLOUR	
● white aluminium RAL 9006	6
○ white RAL 9003	7
● black RAL 9005	8




Channel incl. opal cover

LED CHANNEL SURFACE		
TYPE	L-W-H (mm)	ORDER CODE
corner	2500-18-18	0 1 1 - 7 3 3 1 1 1 O


LED / COB Strips




LED STRIP LOW POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
9.6 W/m	1090 lm/m	62.5 mm	0 1 1 - 7 0 0 1 1 0




LED STRIP MID POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
14.3 W/m	1585 lm/m	50 mm	0 1 1 - 7 0 1 1 1 0



LED STRIP HIGH POWER free-cutting			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
18.5 W/m	2285 lm/m	5 mm	0 1 1 - 7 0 2 1 1 0



COB STRIP MID POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
11.2 W/m	830 lm/m	55.5 mm	0 1 1 - 7 0 3 1 1 0




COB STRIP HIGH POWER			
INSET POWER	LUMINOUS FLUX	CUTTING UNIT	ORDER CODE
16.8 W/m	1350 lm/m	29.41 mm	0 1 1 - 7 0 4 1 1 0

Mounting accessories

END CAPS		
TYPE	PCS	ORDER CODE
LED channel corner	2	0 1 1 - 7 3 3 9 1 1

MOUNTING CLIPS		
TYPE	PCS	ORDER CODE
surface	4	0 1 1 - 7 3 3 9 2 1 6

Power supplies 24V DC, IP 20



non DIM		L-W-H (mm)	ORDER CODE
TYPE			
18 W	non DIM	127-43-30	0 1 1 - 7 9 0 0 0 1 0
30 W linear	non DIM	246-30-16	0 1 1 - 7 9 0 0 1 1 0
35 W	non DIM	142-43-30	0 1 1 - 7 9 0 0 2 1 0
60 W	non DIM	225-43-30	0 1 1 - 7 9 0 0 3 1 0
60 W linear	non DIM	298-30-16	0 1 1 - 7 9 0 0 4 1 0
100 W	non DIM	250-43-30	0 1 1 - 7 9 0 0 5 1 0
100 W linear	non DIM	298-30-17	0 1 1 - 7 9 0 0 6 1 0
200 W	non DIM	325-43-30	0 1 1 - 7 9 0 0 7 1 0

DALI-2		L-W-H (mm)	ORDER CODE
TYPE			
18 W	DALI-2	175-43-30	0 1 1 - 7 9 0 0 0 3 0
35 W	DALI-2	195-43-30	0 1 1 - 7 9 0 0 1 3 0
60 W	DALI-2	225-43-30	0 1 1 - 7 9 0 0 2 3 0
100 W	DALI-2	295-43-30	0 1 1 - 7 9 0 0 3 3 0
150 W	DALI-2	325-43-30	0 1 1 - 7 9 0 0 4 3 0

CASAMBI		L-W-H (mm)	ORDER CODE
TYPE			
35 W	Casambi	195-43-30	0 1 1 - 7 9 0 0 0 9 0
100 W	Casambi	295-43-30	0 1 1 - 7 9 0 0 1 9 0

DIN RAIL		L-W-H (mm)	ORDER CODE
TYPE			
100 W	DIN Rail	70-55-90	0 1 1 - 7 9 1 0 0 1 0
150 W	DIN Rail	105-55-90	0 1 1 - 7 9 1 0 1 1 0

Power supplies 24V DC, IP 65, IP 67



non DIM IP65		L-W-H (mm)	ORDER CODE
TYPE			
60 W IP 65	non DIM	171-62-37	0 1 1 - 7 9 2 0 0 1 0
100 W IP 65	non DIM	220-68-39	0 1 1 - 7 9 2 0 1 1 0
150 W IP 65	non DIM	228-68-39	0 1 1 - 7 9 2 0 2 1 0
240 W IP 65	non DIM	244-68-39	0 1 1 - 7 9 2 0 3 1 0
320 W IP 65	non DIM	252-90-44	0 1 1 - 7 9 2 0 4 1 0

DALI-2 IP67		L-W-H (mm)	ORDER CODE
TYPE			
150 W IP 67	DALI-2	219-63-36	0 1 1 - 7 9 2 0 0 3 0
240 W IP 67	DALI-2	244-71-38	0 1 1 - 7 9 2 0 1 3 0