

MINO 100 system

ceiling/ suspended


EN Luminaire housing from extruded aluminium profile, angular design; no visible screws; for lighting systems; powder coated; luminaire profile for mounting available in advance; remaining components mounted without tools; pendant fitting with cable suspension; height adjustment without tools; spring clip attachment to the luminaire; with transparent feeder cable; light inset consisting of highly reflective coated extruded profile for improved thermal management; option: lighting module is versatile in length; HPO (High Performance Opal) cover for uniform illumination; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; wallwasher light inset; energy-eff. LEDs – very good colour rendering

FR Corps de luminaire en profil extrudé en alu, version arête ; aucune vis visible ; pour les systèmes d'éclairage ; thermolaquée ; Profilé de luminaire pour montage livrable avant ; composants restants montable sans outil ; suspension par câble ; réglage en hauteur sans outil ; fixation au luminaire au moyen de clips à ressort ; conduit d'alimentation transparent inclus ; élément lumineux composé de profilé extrudé laqué hautement réfléchissant pour une gestion thermique améliorée ; en option module d'éclairage raccourcissable de manière flexible ; cache HPO (High Performance Opal) pour éclairage homogène ; cache PMMA microprismatique, avec film diffusant inclus pour réduire la brillance avec un éclairage homogène ; module d'éclairage wallwasher ; LED à haut rend. éner. – excellent rendu coul.

Quickinfo

3000K, 4000K, TW
 CRI ≥ 80, CRI ≥ 90, 3 SDCM
 UGR ≤ 19 / 65° ≤ 3000cd/m²
 up to 3090lm/m
 up to 140lm/W
 L90 @ 50000h
 non DIM, DALI-2
 opal, microprismatic (UGR ≤ 19)

Types



Colours



Light distributions




DiiA® standards
251, 252, 253



single luminaire
(p. 552)




wallwasher
inset (p.944)



DIN EN 12464-1
UGR ≤ 19




flexible
inset



concrete install.
housing (p.946)



tunable white
2700–6500K




CRI ≥ 98
XPECTRUM

Order options


LED TYPE	
mid lumen	L
high lumen	M







COLOUR TEMPERATURE	
3000 K (CRI \geq 90)	0
4000 K (CRI \geq 90)	1
3000 K (CRI \geq 80)	5
4000 K (CRI \geq 80)	6
tunable white 2700–6500 K*	



*DALI-2 DT8


CONTROL	
non DIM	1
DALI-2 (only high lumen)	3

MATERIAL COLOUR	
 pure white RAL 9010	7
 white aluminium RAL 9006	G
 jet black RAL 9005	8
 special colours  p.992	X

LIGHT OPTIC COVER	
opal high performance	H
microprismatic	Z
microprismatic (UGR \leq 19)*	G
blind cover**	B

*UGR \leq 19 only with mid lumen


**only for channel corner 90°

EMERGENCY LIGHT	
1h Accupack	N L 1
3h Accupack	N L 3

Options on request






COLOUR RENDERING INDEX	
CRI \geq 98 XPECTRUM	

LUMINOUS FLUX value calculated for
CRI \geq 80, colour white, cover opal
microprism. Z -8%, microprism. G -10%









MINO 100 ceiling/suspended

INSTALLATION CHANNEL / CORNER 90°

























TYPE	L (mm)	ORDER CODE
channel	1172	034-0126 
channel	1472	034-0156 
channel	3000	034-0306 
channel	custom	E85050 ···· 
channel corner 90° + cover	200x200	034-1266 

LIGHT OPTIC COVER/BLIND COVER

TYPE	L (mm)	ORDER CODE
linear	1171	006-12122 
linear	1470	006-12152 
linear	2997	006-12302 
linear	custom	E80650 ···· 0 
blind cover	3000	006-1130 
blind cover	custom	E80650 ···· 



LIGHT INSET 100

SYSTEM POWER (MID/HIGH LUMEN)	L (mm)	ORDER CODE
8.7/13.8 W	571	007-86   2  7
13/20.6 W	871	007-86   3  7
15.3/27.5 W	1171	007-86   4  7
19.2/34 W	1463	007-86   5  7 
31/55 W	2341	007-86   8  7
38/68 W	2997	007-86   9  7
15.3/27.5 W flex	660-1171	007-86  F  7
31/55 W flex	1903-2341	007-86   G  7

COVER	COLOUR TEMP.	SYSTEM POWER	DELIVERED LUMENS	EFFICACY
mid lumen/opal	3000K	14W/m	1770lm/m	132lm/W
high performance	4000K		1870lm/m	140lm/W
high lumen/opal	3000K	24W/m	2920lm/m	123lm/W
high performance	4000K		3090lm/m	130lm/W


LIGHT INSET 100 tunable white 2700–6500K

SYSTEM POWER	L (mm)	ORDER CODE
21.7 W	871	007-8633D37
29 W	1171	007-8634D37
36 W	1463	007-8635D37
58 W	2341	007-8638D37

Accessories


END CAPS

TYPE	ORDER CODE
end caps (pair)	034-1306 






LINEAR CONNECTOR/THROUGH WIRE

TYPE	ORDER CODE
linear connector (1 piece)	005-40066
linear connector (10 pieces)	005-40066.10
opal cover linear connector	006-10000
through wire 3 × 1.5 mm ² (non DIM, 10 pieces)	004-90003
through wire 5 × 1.5 mm ² (DALI-2, 10 pieces)	004-90005



CEILING CLIP / CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
ceiling clip	10	034-11836
cable suspension	1500	005-2132110
canopy/feeder cable 3 × 1.5 mm ²	1500	005-221231 
canopy/feeder cable 5 × 1.5 mm ²	1500	005-221241 
cable rail	1200	005-2491110



for electrical system configuration see luminaire data sheet at xal.com



WALLWASHER

inset 60/100


EN Lighting module with specially computed, asymmetrical high gloss reflector for homogeneous vertical lighting; lighting module in aluminium, powder coated, installation without tools

FR Module d'éclairage avec réflecteur haute brillance asymétrique, spécialement calculé pour un éclairage vertical homogène ; module d'éclairage en aluminium thermolaqué, installation sans outil

Quickinfo

3000K, 4000K
CRI ≥ 80, 3 SDCM
up to 96lm/W
L80 @ 50000h
non DIM, DALI-2

Types



Colours



Light distribution



wall washer

Order options

COLOUR TEMPERATURE	
3000K	5
4000K	6


CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
○ pure white RAL 9010	7
● white aluminium RAL 9006	G
● jet black RAL 9005	8

LIGHT OPTIC


wallwasher

Planning information

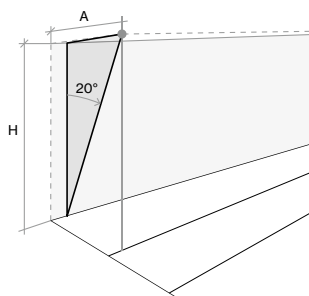

MOUNTING DISTANCE

H (mm)	A (mm)
2750	900
3000	1000
3500	1200



INSET 60 wallwasher




LIGHT INSET only for recessed or surface mounting

SYSTEM POWER	L (mm)	ORDER CODE
10.6 W	571	007-9042
14 W	871	007-9043
18.7 W	1171	007-9044
28 W	1471	007-9045

Technical data

SYSTEM POWER	COLOUR TEMPERATURE	DELIVERED LUMENS	EFFICACY
17 W/m	3000 K	1960 lm/m	121 lm/W
	4000 K	2070 lm/m	128 lm/W

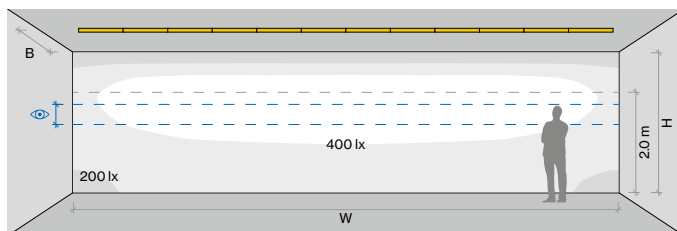



INSET 60 wallwasher, 18.7 W, 3000 K

ROOM VALUES

Wall dimensions	H = 2.8 m W = 10.8 m
Distance to wall	B = 1.3 m
Distance between luminaires	continuous
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8

CALCULATION SURFACE

Surface dimensions	10.8 × 2.8 m
Surface height	0 – 2.8 m
Eye level	1.35 m – 1.75 m



INSET 100 wallwasher



LIGHT INSET

SYSTEM POWER	L (mm)	ORDER CODE
20 W	571	007-9052
30 W	871	007-9053
40 W	1171	007-9054
51 W	1463	007-9055


CABLE SUSPENSION

TYPE	L (mm)	ORDER CODE
inset 100 wallwasher	1500	005-2132310

installation channel is required for mounting

Technical data

SYSTEM POWER	COLOUR TEMPERATURE	DELIVERED LUMENS	EFFICACY
35 W/m	3000 K	2820 lm/m	82 lm/W
	4000 K	2990 lm/m	87 lm/W

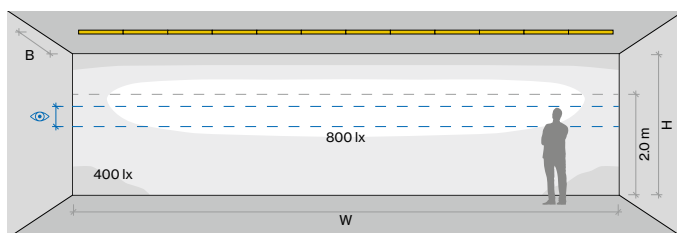

INSET 100 wallwasher, 30 W, 3000 K


ROOM VALUES

Wall dimensions	H = 2.8 m W = 10.8 m
Distance to wall	B = 1.3 m
Distance between luminaires	continuous
Reflection factor	0.7 0.5 0.2
Maintenance factor	0.8

CALCULATION SURFACE

Surface dimensions	10.8 × 2.8 m
Surface height	0 – 2.8 m
Eye level	1.35 m – 1.75 m

Light distribution






asymmetric

LUMINOUS FLUX value calculated for CRI ≥ 80, colour white, reflector chrome

Order options

NUMBER OF PIECES	
2 pieces	2
3 pieces	3



FRAME 40/MINO 40

HOUSING FOR CONCRETE INSTALLATION

TYPE	L (mm)	ORDER CODE
FRAME 40 trim	3010	0 0 5 - 4 1 3 5 6
MINO 40	3010	0 0 5 - 4 1 3 5 6

MOUNTING SET

TYPE	ORDER CODE
FRAME 40 trim	0 3 5 - 0 6 0 2 ↗
MINO 40	0 3 4 - 0 6 0 2 ↗

up to 900 mm: 2 pieces / up to 1500 mm: 3 pieces / up to 3000 mm: 2 x 2 pieces

END CAPS


TYPE	ORDER CODE
end caps (pair)	0 0 5 - 4 1 2 3 6

LINEAR CONNECTOR

TYPE	ORDER CODE
linear connector (1 piece)	0 0 5 - 4 1 1 6 6
linear connector (10 pieces)	0 0 5 - 4 1 1 6 6 . 1 0

CORNER CONNECTOR 90°

TYPE	L (mm)	ORDER CODE
FRAME 40 trim	140	0 3 5 - 0 6 0 1 6
MINO 40	140	0 3 5 - 0 6 0 1 6

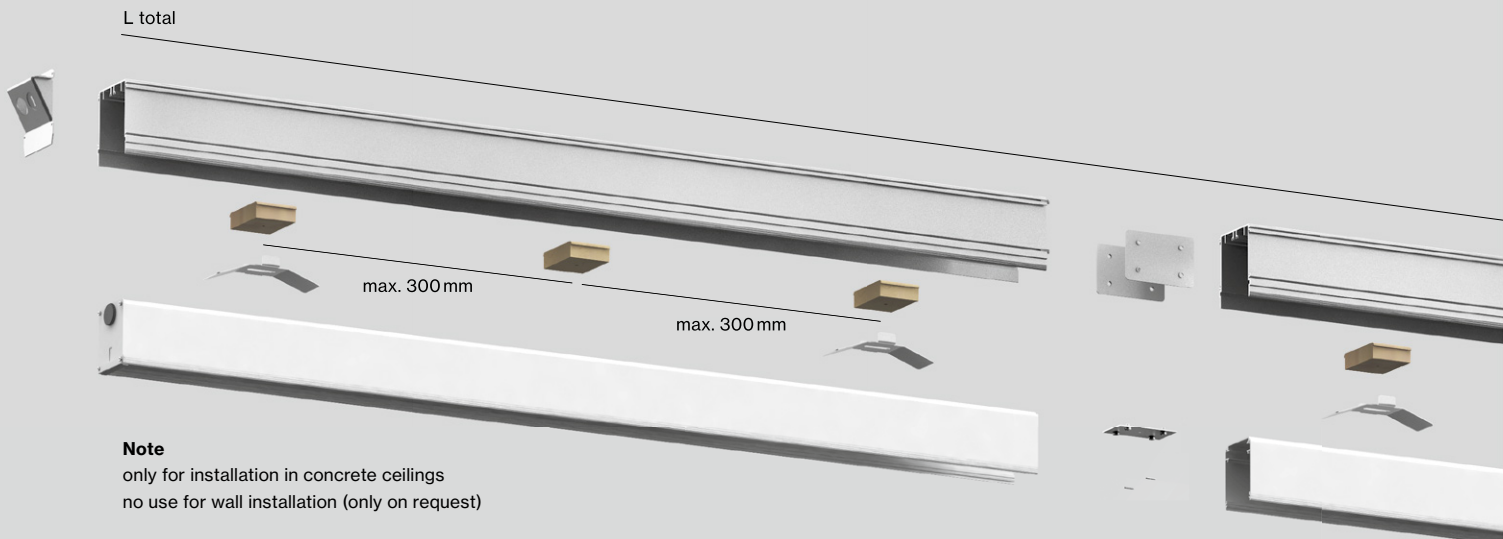

Note
only for installation in concrete ceilings
no use for wall installation (only on request)




CONCRETE installation housing

EN Concrete casting made of aluminium profile, designed for continuous lighting systems

FR Boîtier encast. béton en profil d'aluminium, conçu pour systèmes d'éclairage continu

Order options

NUMBER OF PIECES	
2 pieces	2
3 pieces	3



FRAME 60/MINIMAL 60/MINO 60/BASO 60

HOUSING FOR CONCRETE INSTALLATION

TYPE	L (mm)	ORDER CODE
FRAME 60 trim	3000	005-41346
BASO 60 IP54 trim	3000	005-41346
MINIMAL 60 trimless	3000	005-41346
MINO 60 ceiling	3000	005-41446
BASO 60 IP54 surface	3000	005-41446

MOUNTING SET

TYPE	ORDER CODE
FRAME 60 trim	035-0600
BASO 60 IP54 trim	035-0600
MINIMAL 60 trimless	036-0400
MINO 60 ceiling	034-0400
BASO 60 IP54 surface	034-0400

up to 900mm: 2 pieces / up to 1500mm: 3 pieces / up to 3000mm: 2 x 2 pieces

END CAPS

TYPE	ORDER CODE
end caps (pair)	005-41246

LINEAR CONNECTOR

TYPE	ORDER CODE
linear connector (1 piece)	005-41166
linear connector (10 pieces)	005-41166.10

CORNER CONNECTOR 90°


TYPE	L (mm)	ORDER CODE
FRAME 60 trim	142	035-04016
BASO 60 IP54 trim	142	035-04016
MINIMAL 60 trimless	146	036-04016
MINO 60 ceiling	157	034-04016
BASO 60 IP54 surface	157	034-04016

FRAME 100/MINIMAL 100/MINO 100

HOUSING FOR CONCRETE INSTALLATION




TYPE	L (mm)	ORDER CODE
FRAME 100 trim	3000	005-41366
MINIMAL 100 trimless	3000	005-41366
MINO 100 ceiling	3000	005-41466



MOUNTING SET

TYPE	ORDER CODE
FRAME 100 trim	035-0600
MINIMAL 100 trimless	036-0500
MINO 100 ceiling	034-0400

up to 900mm: 2 pieces / up to 1500mm: 3 pieces / up to 3000mm: 2x2 pieces




END CAPS

TYPE	ORDER CODE
end caps (pair)	005-41266



LINEAR CONNECTOR

TYPE	ORDER CODE
linear connector (1 piece)	005-41166
linear connector (10 pieces)	005-41166.10



CORNER CONNECTOR 90°

TYPE	L (mm)	ORDER CODE
FRAME 100 trim	202	035-05016
MINIMAL 100 trimless	207	036-05016
MINO 100 ceiling	207	034-05016