

MOVE IT 10 system

recessed trimless/surface


EN Thin extruded aluminium profile with 16 mm (trimless) or 11 mm (surface) height and 10 mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ceiling surface mounting; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of FLEX or LEVEL connectors; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

ES Perfil bajo de aluminio extruido con 16 mm (trimless) o 11 mm (surface) de altura y 10 mm de anchura de junta; disponible para el encastre sin bordes en techos de cartón yeso (montaje en pared o techo) de 12,5 mm de espesor; o para montaje sobre pared/techo; diseñado para la creación de sistemas continuos; montaje flexible del sistema con conectores en forma de L, T o X y conectores FLEX o LEVEL; con perfil de raíl electrificado integrado para la recepción de la tensión de alimentación y DALI-2; superficie anodizada o recubierto de polvo; montaje flexible y sin herramienta de los insertos con cierre de clip



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Types

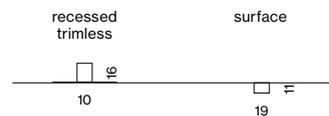

Configurations

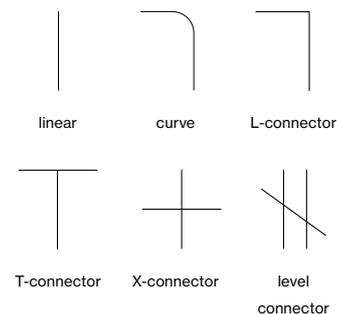

Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P
- jet black RAL 9005

MATERIAL COLOUR

ACCESSORIES

- traffic white* RAL 9016
- jet black RAL 9005



*mechanical connectors are always traffic white / jet black accept mechanical recessed trimless

Options on request

CONNECTOR

- T connector mechanical
 - X connector mechanical
- only for recessed trimless

MOVE IT 10 trimless




INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-1113038
2100	channel	030-1115038
3100	channel	030-1117038
custom cut	channel	E83610 8



END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-1120018
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical*	030-2121138
X connector electrical*	030-2131138
linear connector mechanical	030-1134018
L connector mechanical	030-1135018

*when using T and X connector mechanical more electrical and mechanical connectors see p. 21



MOVE IT 10 surface




INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-1213038
2100	channel	030-1215038
3100	channel	030-1217038
custom cut	channel	E83620 8
R 300	curve channel	030-1231038
R 500	curve channel	030-1232038

END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-1220018
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical	030-2121138
X connector electrical	030-2131138
L connector mechanical	030-1235018
T connector mechanical	030-1236018
X connector mechanical	030-1237018

more electrical and mechanical connectors see p. 21

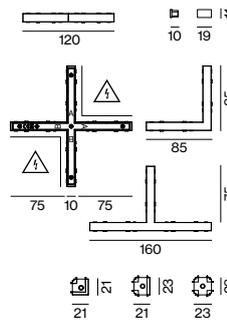

Accessories

BLIND COVER

L (mm)		ORDER CODE
1100	blind cover	030-1003018
2100	blind cover	030-1005018
3100	blind cover	030-1007018
custom cut	blind cover	E83600 8


ELECTRICAL ACCESSORIES

TYPE	ORDER CODE
power feeder (only for surface)	030-2523038
internal power feeder (incl. cable 2000mm)	030-2525038
internal power feeder (incl. cable 5000mm)	030-2525138

MOUNTING ACCESSORY

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000

guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector





MOVE IT 10 system

suspended


EN Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for suspended mounting (cable suspension, height adjustment without tools, incl. black feed); with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

ES Perfil bajo de aluminio extruido con 10 mm de anchura de junta; disponible en forma angular (24 mm de altura) o tubular (26 mm de altura); para montaje suspendido (suspensión por cable, ajuste de altura sin herramienta, cable de alimentación negro incluido); con perfil de carril electrificado incorporado en ambos lados para la toma de suministro eléctrico y señal DALI-2; suministro eléctrico y señal DALI-2 para ambos carriles electrificados con una sola toma de alimentación mediante conector PASS THROUGH; diseñado para la creación de sistemas continuos; montaje flexible del sistema con conectores en forma de L, T o X y conectores LEVEL; superficie anodizada o recubierto de polvo; montaje flexible y sin herramienta de los insertos con cierre de clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Types



Configurations

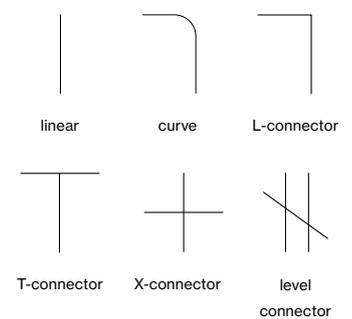

Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P 8
- jet black RAL 9005 8

MATERIAL COLOUR ACCESSORIES

- traffic white* RAL 9016 7
- jet black RAL 9005 8

*mechanical connectors are traffic white / jet black

MATERIAL COLOUR CABLE SUSPENSION

- chrome 4
- jet black RAL 9005 8
- traffic white 9016 / chrome 7

MOVE IT 10 square suspended




INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-131303
2100	channel	030-131503
3100	channel	030-131703
custom cut	channel	E83630
R 300	curve channel	030-133103
R 500	curve channel	030-133203


END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-132001
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical	030-2121138
X connector electrical	030-2131138
linear connector mechanical	030-2300018
L connector mechanical	030-133501
T connector mechanical	030-133601
X connector mechanical	030-133701

more electrical and mechanical connectors see page 21

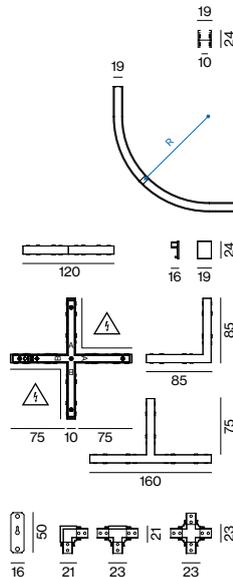

MOVE IT 10 round suspended




INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-141303
2100	channel	030-141503
3100	channel	030-141703
custom cut	channel	E83640
R 300	curve channel	030-143103
R 500	curve channel	030-143203

END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-142001
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical	030-2121138
X connector electrical	030-2131138
linear connector mechanical	030-2300018
L connector mechanical	030-143501
T connector mechanical	030-143601
X connector mechanical	030-143701

more electrical and mechanical connectors see page 21

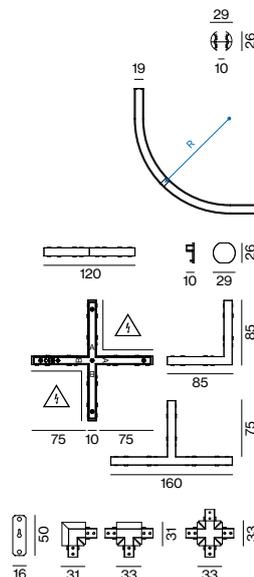

Accessories


BLIND COVER see page 19

INDIRECT LIGHT INSET see page 19

CABLE SUSPENSION / CANOPY / ELECTRICAL ACCESSORIES

TYPE	L (mm)	ORDER CODE
cable suspension	1500	030-223001
cable susp. linear connector	1500	030-221001
cable susp. linear conn. electrical	1500	030-222001
canopy square	90-90-22	005-231171
canopy round	ø90-22	005-260073
internal power feeder (incl. cable 2000mm)		030-2525038
internal power feeder (incl. cable 5000mm)		030-2525138
pass through connector electrical (pair)		030-2171138
3-in-1 mounting tool*		030-2611000

*guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector
more electrical and mechanical connectors see page 21

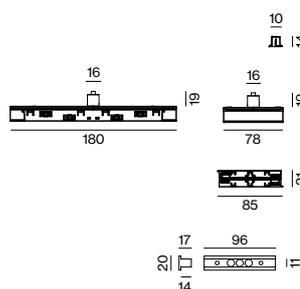



MOVE IT 10 system

direct suspended


EN Thin extruded aluminium profile with 24 mm height and 10 mm width groove; for suspended mounting (cable suspension, height adjustment without tools, incl. black feed); designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

ES Perfil de aluminio extrusionado plano con una altura de 24 mm y con ancho de junta de 10 mm; para montaje suspendido (suspensión por cable, ajuste de altura sin herramienta, cable de alimentación negro incluido); diseñado para la creación de sistemas continuos; montaje flexible del sistema con conectores en forma de L, T o X y conectores LEVEL; con perfil de rail electricificado integrado para la recepción de la tensión de alimentación y DALI-2; superficie anodizada o recubierto de polvo; montaje flexible y sin herramienta de los insertos con cierre de clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Type



Configurations

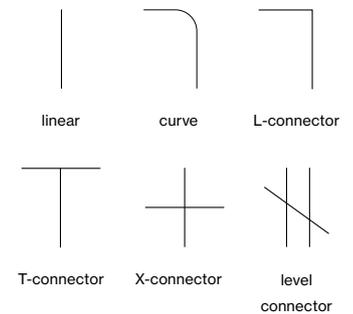

Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P 8
- jet black RAL 9005 8

MATERIAL COLOUR ACCESSORIES


- traffic white* RAL 9016 7
- jet black RAL 9005 8

*mechanical connectors are traffic white / jet black

MATERIAL COLOUR CABLE SUSPENSION


- chrome 4
- jet black RAL 9005 8
- traffic white 9016 / chrome 7

MOVE IT 10 square direct suspended



INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-151303 <input checked="" type="checkbox"/>
2100	channel	030-151503 <input checked="" type="checkbox"/>
3100	channel	030-151703 <input checked="" type="checkbox"/>
custom cut	channel	E83650 ···· <input checked="" type="checkbox"/>
R 300	curve channel	030-153103 <input checked="" type="checkbox"/>
R 500	curve channel	030-153203 <input checked="" type="checkbox"/>



Accessories

END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-132001 <input checked="" type="checkbox"/>
linear connector electrical	030-2101138 <input checked="" type="checkbox"/>
L connector electrical	030-2111138 <input checked="" type="checkbox"/>
T connector electrical	030-2121138 <input checked="" type="checkbox"/>
X connector electrical	030-2131138 <input checked="" type="checkbox"/>
linear connector mechanical	030-2300018 <input checked="" type="checkbox"/>
L connector mechanical	030-133501 <input checked="" type="checkbox"/>
T connector mechanical	030-133601 <input checked="" type="checkbox"/>
X connector mechanical	030-133701 <input checked="" type="checkbox"/>

more electrical and mechanical connectors see page 21



BLIND COVER

L (mm)		ORDER CODE
1100	blind cover	030-100301 <input checked="" type="checkbox"/>
2100	blind cover	030-100501 <input checked="" type="checkbox"/>
3100	blind cover	030-100701 <input checked="" type="checkbox"/>
custom cut	blind cover	E83600 ···· <input checked="" type="checkbox"/>

CABLE SUSPENSION / CANOPY / ELECTRICAL ACCESSORIES

TYPE	L (mm)	ORDER CODE
cable suspension	1500	030-223001 <input type="checkbox"/>
cable susp. linear connector	1500	030-221001 <input type="checkbox"/>
cable susp. linear conn. electrical	1500	030-222001 <input type="checkbox"/>
canopy square	90-90-22	005-231171 <input checked="" type="checkbox"/>
canopy round	ø90-22	005-260073 <input checked="" type="checkbox"/>
internal power feeder (incl. cable 2000mm)		030-2525038 <input checked="" type="checkbox"/>
internal power feeder (incl. cable 5000mm)		030-2525138 <input checked="" type="checkbox"/>
pass through connector electrical (pair)		030-2171138 <input checked="" type="checkbox"/>
3-in-1 mounting tool*		030-2611000 <input checked="" type="checkbox"/>

*guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector
more electrical and mechanical connectors see page 21

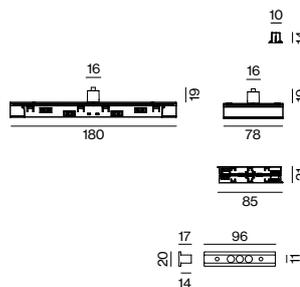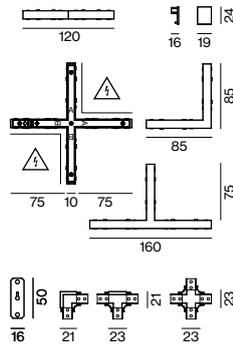



MOVE IT 10 system

pole


EN Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for vertical and horizontal mounting; easy installation of the mounting set, incl. feed; with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

ES Perfil bajo de aluminio extruido con 10 mm de anchura de junta; disponible en forma angular (24 mm de altura) o tubular (26 mm de altura); para montaje en vertical y en horizontal; instalación sencilla del kit de montaje, incl. toma de alimentación; con perfil de carril electrificado incorporado en ambos lados para la toma de suministro eléctrico y señal DALI-2; suministro eléctrico y señal DALI-2 para ambos carriles electrificados con una sola toma de alimentación mediante conector PASS THROUGH; diseñado para la creación de sistemas continuos; montaje flexible del sistema con conectores en forma de L, T o X y conectores LEVEL; superficie anodizada o recubierto de polvo; montaje flexible y sin herramienta de los insertos con cierre de clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000h
DALI-2


Types



Mounting types

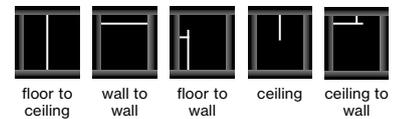

Colours



custom cut on building site

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2

MATERIAL COLOUR


- traffic white 9016 / jet black 9005 P
- jet black RAL 9005

MATERIAL COLOUR ACCESSORIES

- traffic white* RAL 9016
- jet black RAL 9005

*mechanical connectors are traffic white/jet black

MOVE IT 10 square pole



INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-131303
2100	channel	030-131503
3100	channel	030-131703
custom cut	channel	E83630



INSTALLATION TRACK DIRECT


L (mm)		ORDER CODE
1100	channel	030-151303
2100	channel	030-151503
3100	channel	030-151703
custom cut	channel	E83650



MOUNTING SET

TYPE	ORDER CODE
floor to ceiling set (pair)	030-134101
wall to wall set (pair)	030-134101
floor to wall set (wall bracket 400 mm incl. end cap)	030-134201
ceiling set (incl. end cap)	030-134301

MOVE IT 10 round pole



INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-141303
2100	channel	030-141503
3100	channel	030-141703
custom cut	channel	E83640




MOUNTING SET

TYPE	ORDER CODE
floor to ceiling set (pair)	030-144101
wall to wall set (pair)	030-144101
floor to wall set (wall bracket 400 mm incl. end cap)	030-144201
ceiling set (incl. end cap)	030-144301

Accessories


BLIND COVER

L (mm)		ORDER CODE
1100	blind cover	030-100301
2100	blind cover	030-100501
3100	blind cover	030-100701
custom cut	blind cover	E83600



ELECTRICAL ACCESSORIES

TYPE	ORDER CODE
internal power feeder (incl. cable 2000 mm)	030-2525038
internal power feeder (incl. cable 5000 mm)	030-2525138
pass through connector electrical (pair)	030-2171138



MOUNTING ACCESSORY

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000
guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector	


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black



Types

- 1 Linear Connector
- 2 L-Connector
- 3 T-Connector
- 4 X-Connector
- 5 Flex Connector
- 6 Ceiling to Wall Connector
- 7 Level Connector
- 8 Pass Through Connector

Configurations

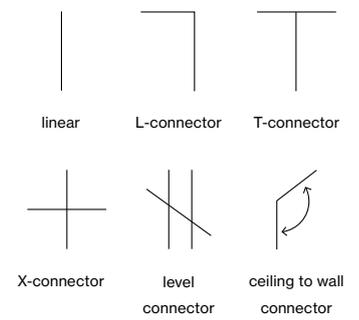

Colours



ELECTRICAL accessories

MOVE IT 10 system

EN Mechanical and electrical connectors to MOVE IT 10 system; in L-, T- or X-shape; or FLEX, CEILING TO WALL or LEVEL connectors, as well as PASS THROUGH connectors; for flexible system design; different converters for the entire MOVE IT system

ES Conectores mecánicos y eléctricos para MOVE IT 10 system; en forma de L, T o X; o conectores FLEX, CEILING TO WALL, LEVEL, y PASS THROUGH; para el montaje flexible del sistema; diferentes drivers para todo el sistema MOVE IT

Order options

CONNECTOR MECHANICAL	T
recessed*	1
surface	2
suspended square	3
suspended round	4

*T- and X-connector on request

CONTROL

DALI-2

MATERIAL COLOUR ACCESSORIES

○ traffic white* RAL 9016	7
● jet black RAL 9005	8


*mechanical connectors are always traffic white/jet black accept mechanical recessed trimless

Options on request

CONNECTOR

T connector mechanical
X connector mechanical


only for recessed trimless



Electrical accessories


LINEAR CONNECTOR

TYPE	ORDER CODE
linear connector electrical	030-2101138
linear connector mechanical/electrical	030-2301038
linear connector mechanical recessed	030-113401 ■
linear connector mechanical suspended	030-2300018




L CONNECTOR

TYPE	ORDER CODE
L connector electrical	030-2111138
L connector mechanical	030-1T3501 ■




T CONNECTOR

TYPE	ORDER CODE
T connector electrical	030-2121138
T connector mechanical	030-1T3601 ■



X CONNECTOR

TYPE	ORDER CODE
X connector electrical	030-2131138
X connector mechanical	030-1T3701 ■



FLEX/CEILING TO WALL/ LEVEL


TYPE	ORDER CODE
flex connector electrical	030-2141138
ceiling to wall connector electrical	030-2161138
level connector electrical	030-2151138
level connector mechanical	030-2351118



PASS THROUGH CONNECTOR

TYPE	ORDER CODE
pass through connector electrical (pair)	030-2171138


electrical connection from direct to indirect and vice versa



MOUNTING ACCESSORY

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000

guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector



POWER FEEDER

TYPE	ORDER CODE
power feeder (only for surface)	030-2523038
internal power feeder (incl. cable 2000 mm)	030-2525038
internal power feeder (incl. cable 5000 mm)	030-2525138

Order options


CONTROL

DAI-2

MATERIAL COLOUR

● jet black RAL 9005

WIRELESS TO DALI-2 control device



POWER SUPPLY EXTERNAL supply 220-240V AC, 48V, 50-60Hz


TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
100W	PC II η 92%	external	350-30-18	002-62134
150W	PC II η 92%	external	350-30-18	002-62135
250W	PC II η 93%	external	400-40-22	002-62139

ENEC approved

POWER SUPPLY BASIC 48V

220-240V | 50-60Hz | PC II | Lifetime @ 120W, 45° ambient temp. cascable max. 3 devices


TYPE	EFFICIENCY/LIFETIME	W-H-D (mm)	ORDER CODE
160W	η 94.5% / > 100.000h	72-90-63	005-6520210



DIN RAIL POWER SUPPLY PRO 48V

220-240V | 50-60Hz | PC I | MTBF @ 55° ambient temperature cascable max. 5 devices (240W) or 3 devices (480W)

TYPE	EFFICIENCY/MTBF	W-H-D (mm)	ORDER CODE
240W	η 92% / > 400.000h	60-125-100	005-6220110
480W	η 93% / > 350.000h	120-125-100	005-6220210



DALI-2 SELV DEVICE

TYPE	L-W-H (mm)	ORDER CODE
control unit	212-37-26	050-2061130


necessary to create DALI-2 SELV signal; DALI power supply integrated



WIRELESS TO DALI-2 CONTROL DEVICE


TYPE	L-W-H (mm)	ORDER CODE
Casambi	150-11-23	030-2531030

DALI-2 SELV device required



ES Conectores mecánicos y eléctricos para MOVE IT 10 system; en forma de L, T o X; o conectores FLEX, CEILING TO WALL, LEVEL, y PASS THROUGH; para el montaje flexible del sistema; diferentes drivers para todo el sistema MOVE IT

Private Residence
Visualisation

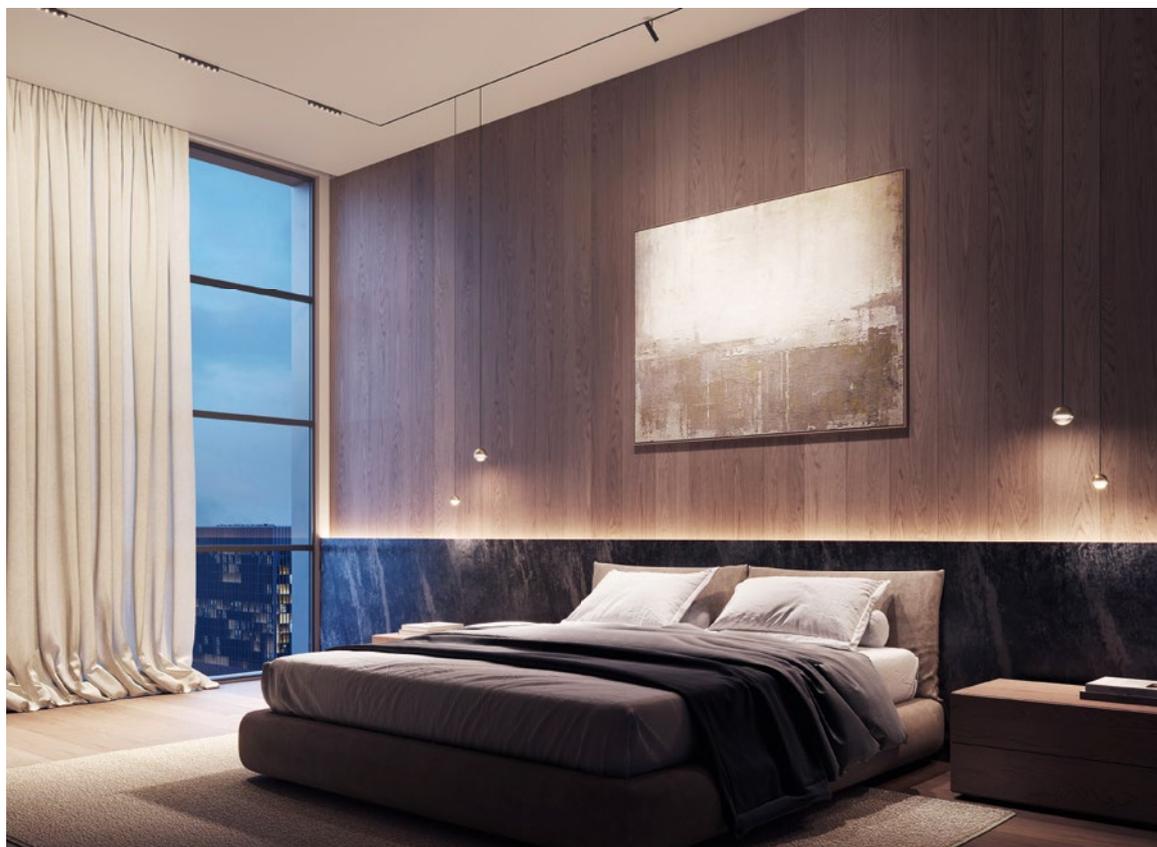




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90, 3 SDCM
 up to 2390 lm | 91 lm/W
 DALI-2

Types


opal




reflectorline



darklight



indirect



Colour




Light distributions



REFLECTORLINE / OPAL / DARKLIGHT / INDIRECT

linear inset 10



flush
 mounted



flex inset for
 reflectoreline

Order options


COLOUR TEMPERATURE	
2700K	4
3000K	5
3500K	7
4000K	6

CONTROL
 DALI-2

MATERIAL COLOUR
 ● jet black RAL 9005


LIGHT OPTIC
 opal high performance
 reflectorline
 darklight
 indirect

LIGHT INSET 10



OPAL HIGH PERFORMANCE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.9W	2700K	389lm	500	030-6120::38H
	3000K	421lm		
	4000K	421lm		




REFLECTORLINE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
6.6W	2700K	575lm	300	030-6110::38M
	3000K	601lm		
	4000K	601lm		


REFLECTORLINE FLEX

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
6.6W	2700K	575lm	300	030-7110::38M
	3000K	601lm		
	4000K	601lm		



DARKLIGHT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.7W	2700K	441lm	300	030-6210::38M
	3000K	465lm		
	4000K	514lm		




INDIRECT incl. feeder

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
15.8W	2700K	1080lm	1000	030-6330::38M
	3000K	1140lm		
	4000K	1190lm		
32W	2700K	2170lm	2000	030-6370::38M
	3000K	2280lm		
	4000K	2390lm		

MOUNTING ACCESSORY

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000
for custom cut tracks, Indirect light inset and Pass Through connector	



INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour black




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 3 SDCM
 up to 2140 lm/m | 130 lm/W
 DALI-2

Type

spotline



Colours



Light distribution



suitable for Interalu
 smart ceilings & Hunter
 Douglas Architectural



DIN EN 12464-1
 UGR ≤ 19



high efficiency
 up to 130 lm/W

SPOTLINE

linear inset 10

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2


MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8

LIGHT OPTIC

spotline


LIGHT INSET 10



SPOTLINE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
16.0 W	2700 K	1980 lm	1000	0 3 0 - 5 1 3 0 :: 3 <input checked="" type="checkbox"/> W
	3000 K	2140 lm		
	3500 K	2140 lm		
	4000 K	2140 lm		

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

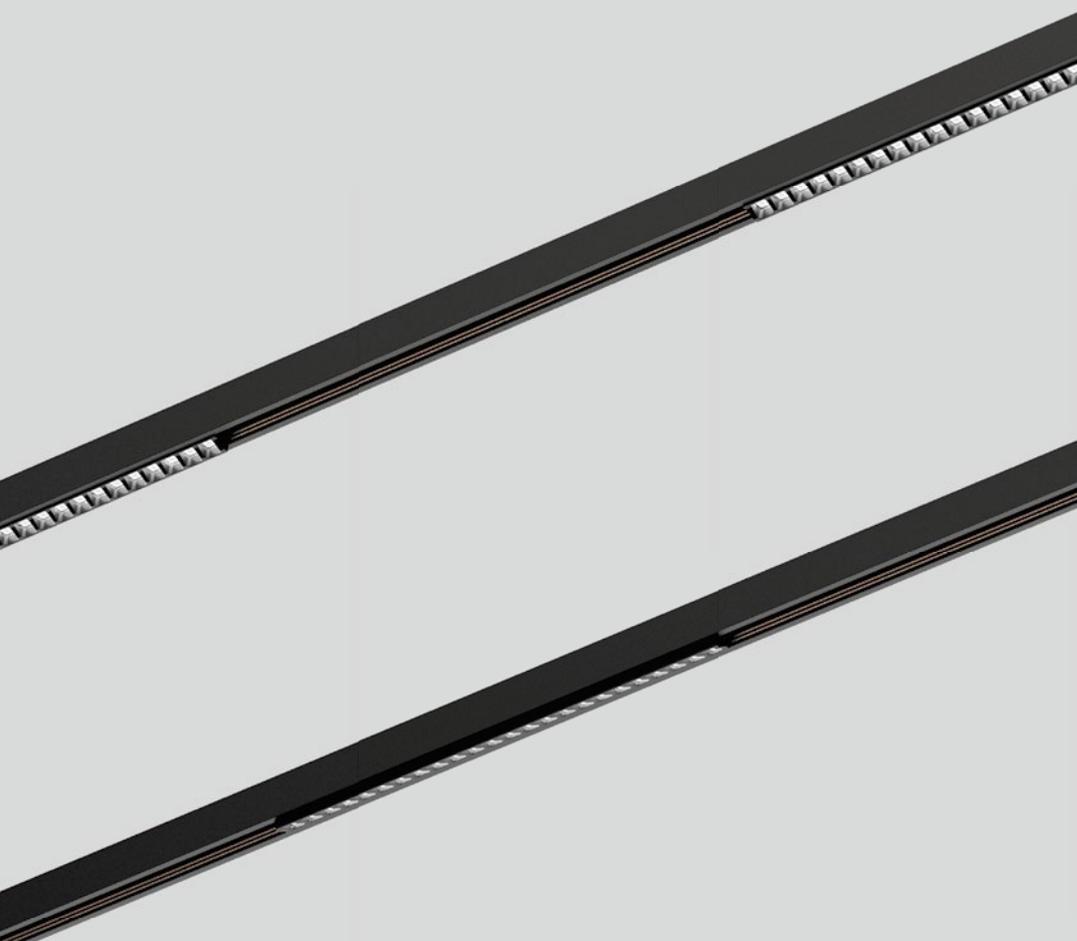


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI \geq 90, 3 SDCM
up to 1334 lm/m | 115 lm/W
DALI-2

Types

wallwasher



Colours



Light distribution



wall

WALLWASHER

linear inset 10



high efficiency
lens optic

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white RAL 9016 7
 jet black RAL 9005 8

LIGHT OPTIC

wallwasher


LIGHT INSET 10



WALLWASHER

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.3 W	2700 K	1185 lm	300	030-5010-3 A
	3000 K	1242 lm		
	3500 K	1334 lm		
	4000 K	1334 lm		

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

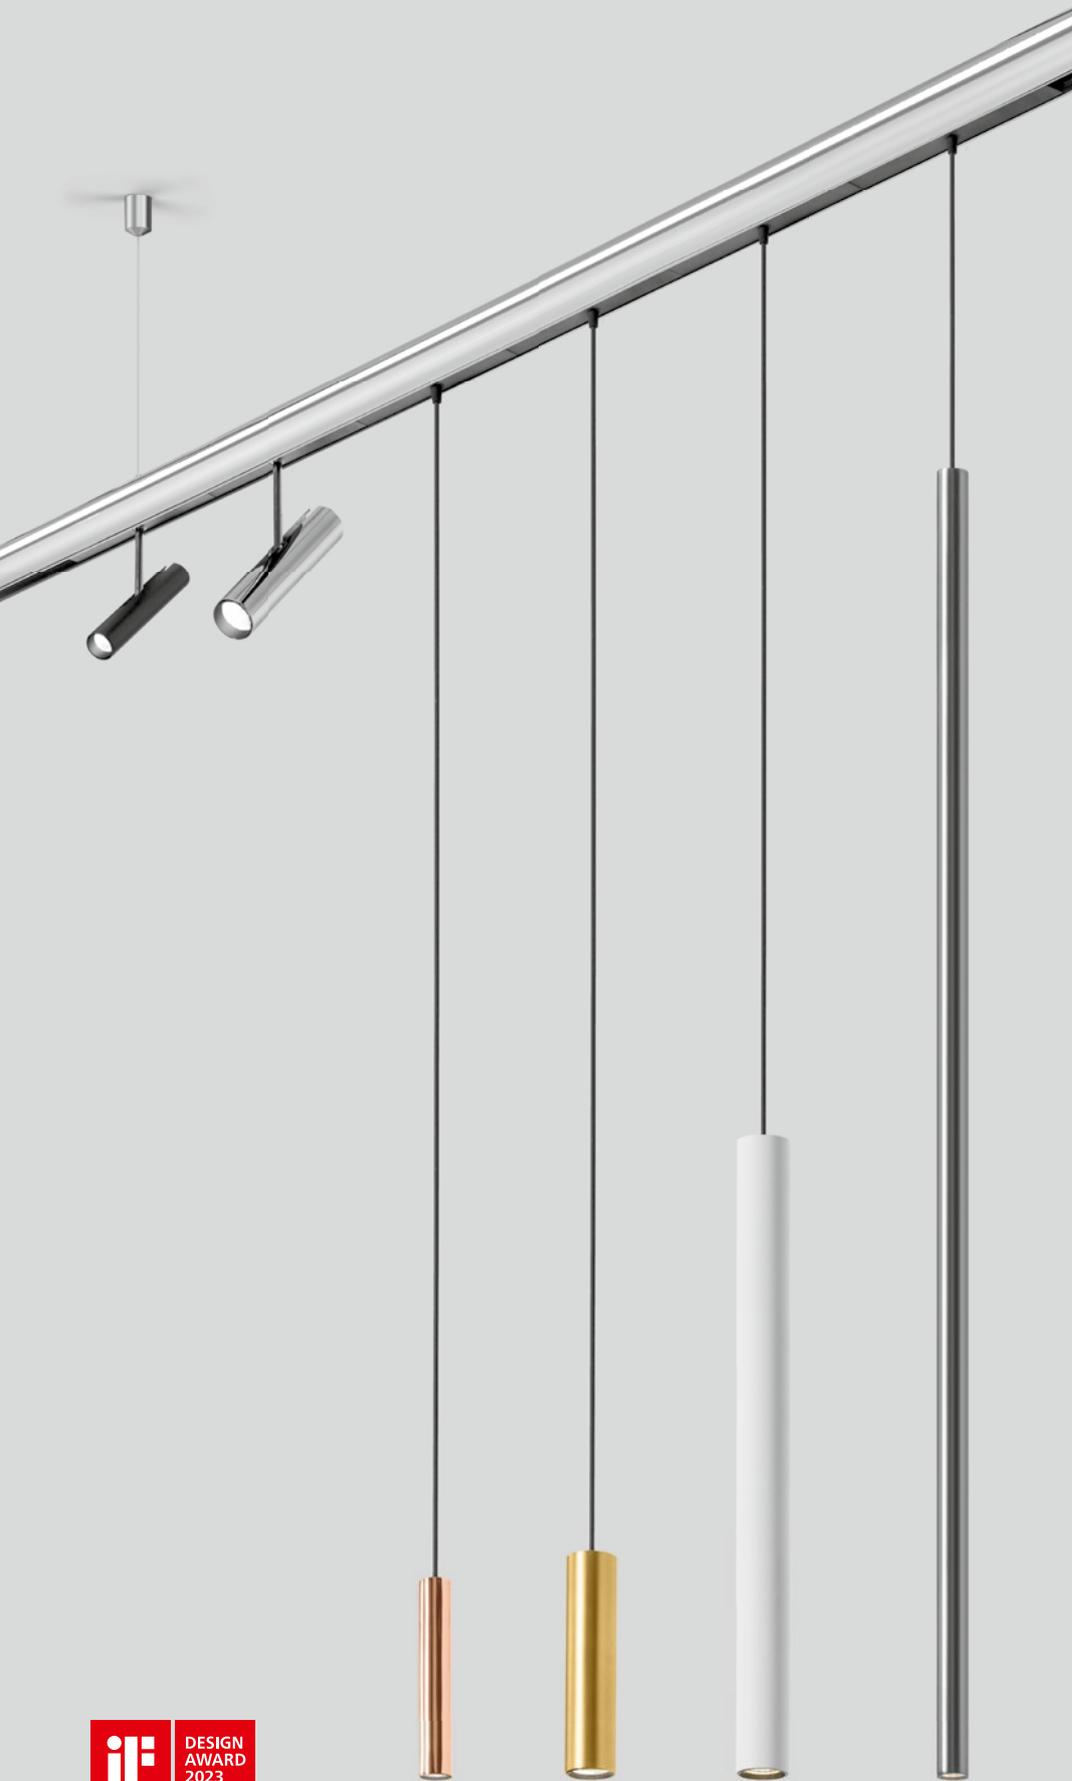


Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90
 up to 91lm/W
 DALI-2

Types

adjustable rod

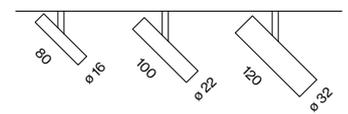

suspended

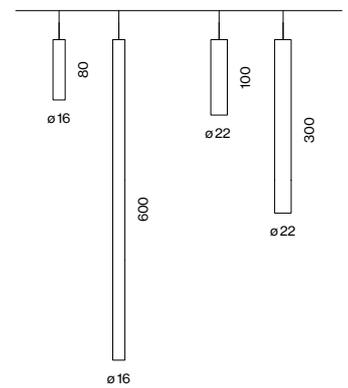

Colours



Light distributions

TILA 16



TILA 22/32




flex inset for curve elements



glare control via honeycomb louver



365° rotatable 135° tiltable



free positioning by cable and hook



flush adapter mounting



TILA
 decorative inset 10

Order options

HOUSING HEIGHT TILA 16	L
80 mm	0
600 mm	1

HOUSING HEIGHT TILA 22	L
100 mm	3
300 mm	4

COLOUR TEMPERATURE	••
2700 K	4
3000 K	5
3500 K	7
4000 K	6





CONTROL
DALI-2

MATERIAL COLOUR	☑
○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9

MATERIAL COLOUR ACCESSORIES	■
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE TILA 16	▲
medium 23°	M
flood 31°	F

BEAM ANGLE TILA 22/32	▲
spot 15/18°	S
medium 26/24°	M
flood 43/34°	F

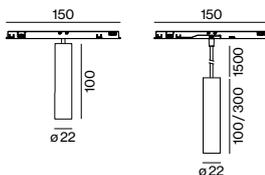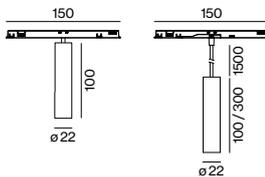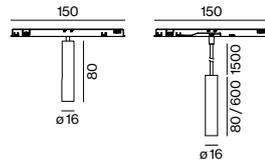

TILA 16



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	205 lm	030-6500::3▲
	3000 K	220 lm	
	4000 K	220 lm	

SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	205 lm	030-66 L0::3▲
	3000 K	220 lm	
	4000 K	220 lm	

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	198 lm	030-7500::3▲
	3000 K	213 lm	
	4000 K	220 lm	

SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	198 lm	030-76 L0::3▲
	3000 K	213 lm	
	4000 K	220 lm	

TILA 22



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	347 lm	030-6530::3▲
	3000 K	354 lm	
	4000 K	385 lm	

SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	347 lm	030-66 L0::3▲
	3000 K	354 lm	
	4000 K	385 lm	

ADJUSTABLE FLEX


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	344 lm	030-7530::3▲
	3000 K	351 lm	
	4000 K	385 lm	

SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	344 lm	030-76 L0::3▲
	3000 K	351 lm	
	4000 K	385 lm	


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white, medium

TILA 32



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.7 W	2700 K	824lm	030-6560::3▲▲
	3000 K	855lm	
	4000 K	892lm	



ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.7 W	2700 K	824lm	030-7560::3▲▲
	3000 K	855lm	
	4000 K	892lm	

Mounting accessories



HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001■

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
TILA 22	20-3	007-1965118
TILA 32	30-3	007-1965168

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
TILA 32	30-3	007-1965860

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
TILA 32	30-3	007-1965960

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
TILA 32	30-3	007-1965760

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white, medium




Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 up to 1140 lm | 105 lm/W
 DALI-2

Types

square track



round track



Colours



Light distributions

TARO 32



TARO 45



TARO
 decorative inset 10



wallwasher floor
 360° rotatable



wallwasher
 floor

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9


BEAM ANGLE TARO 32

spot 18°	S
medium 24°	M
flood 34°	F

BEAM ANGLE TARO 45


medium 24°	M
flood 36°	F

TARO 32



DOWNLIGHT SQUARE TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.6 W	2700 K	796lm	030-6700::3■▲
	3000 K	826lm	
	4000 K	862lm	



DOWNLIGHT ROUND TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.6 W	2700 K	796lm	030-6740::3■▲
	3000 K	826lm	
	4000 K	862lm	

TARO 45



DOWNLIGHT SQUARE TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.9 W	2700 K	1050lm	030-6710::3■▲
	3000 K	1090lm	
	4000 K	1140lm	



DOWNLIGHT ROUND TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.9 W	2700 K	1050lm	030-6750::3■▲
	3000 K	1090lm	
	4000 K	1140lm	

TARO 45 wallwasher floor



WALLWASHER FLOOR SQUARE TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.3 W	2700 K	840lm	030-6780::3■W
	3000 K	790lm	
	4000 K	790lm	



WALLWASHER FLOOR ROUND TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.3 W	2700 K	840lm	030-6790::3■W
	3000 K	790lm	
	4000 K	790lm	

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·4	007-1965168
TARO 45	42·3	007-1965188

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·3	007-1965860
TARO 45	42·3	007-1965880


SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·3	007-1965960
TARO 45	42·3	007-1965980

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·3	007-1965760
TARO 45	42·3	007-1965780


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white, medium

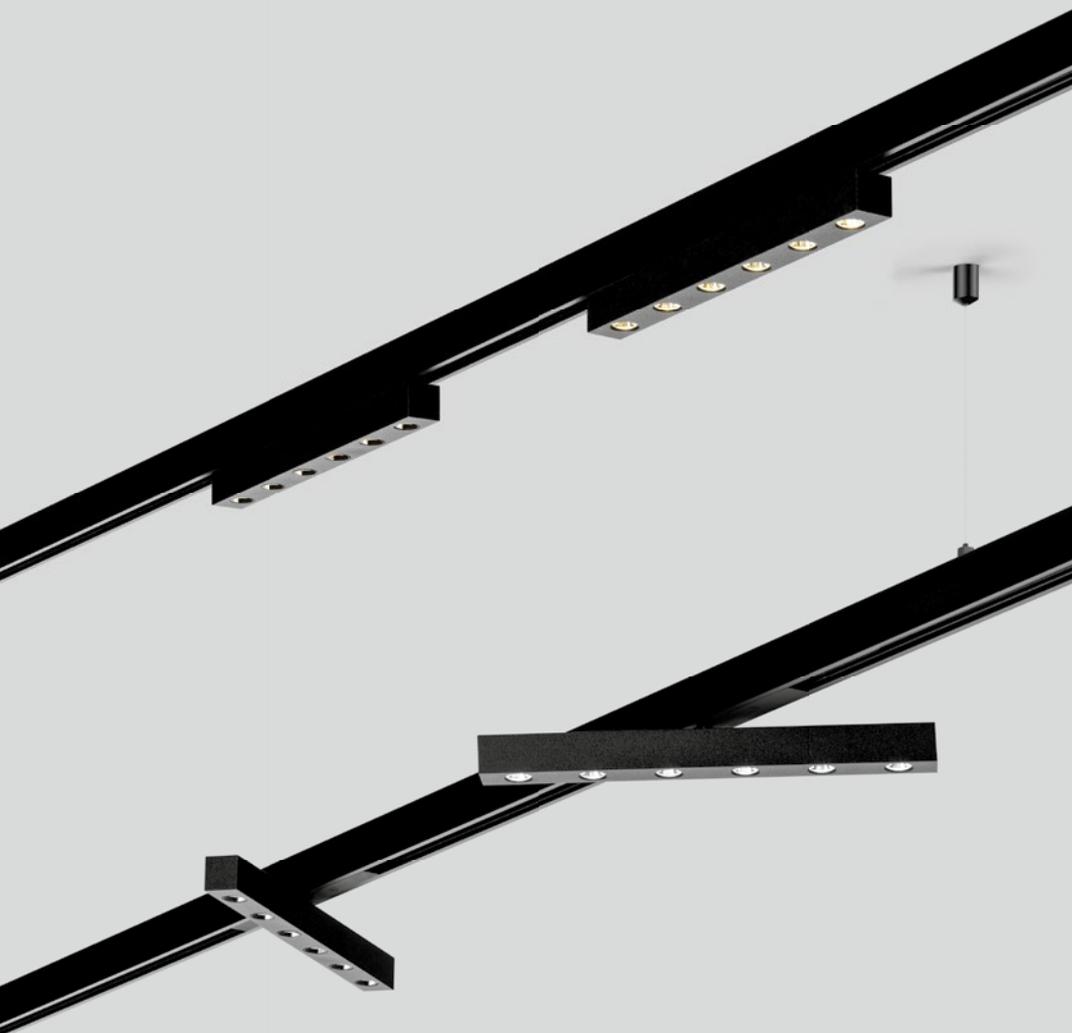

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90, 2 SDCM
 up to 1480 lm | 80 lm/W
 DALI-2

Type

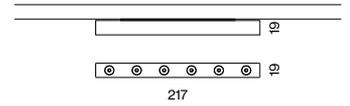

Colours



Light distributions



DESIGN
AWARD
2023

GIRA

decorative inset 10



360°
rotatable



wallwasher
floor

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2


MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8

BEAM ANGLE

medium 23°	M
flood 34°	F


GIRA



DOWNLIGHT ROTATABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
18.2 W	2700 K	1290 lm	0 3 0 - 6 4 1 0 :: 3  
	3000 K	1450 lm	
	4000 K	1450 lm	

GIRA wallwasher floor



WALLWASHER FLOOR ROTATABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
18.8 W	2700 K	1370 lm	0 3 0 - 6 4 3 0 :: 3   W
	3000 K	1480 lm	
	4000 K	1480 lm	


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, medium



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 up to 1050 lm | 130 lm/W
 DALI-2

Types

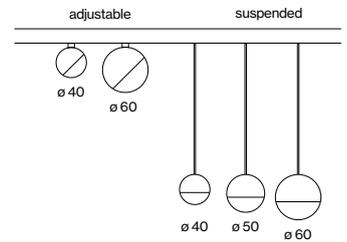

Colours



Light distribution




NOBA
 decorative inset 10



365° rotatable
 90° tiltable



flex inset for
 curve elements



free positioning by
 cable and hook



high quality
 glass lens

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2

MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8
<input type="radio"/> brushed aluminium	6
<input type="radio"/> chrome	4
<input type="radio"/> gun metal	5
<input type="radio"/> brushed brass	3
<input type="radio"/> rose gold	9

MATERIAL COLOUR


ACCESSORIES

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8

BEAM ANGLE


wide flood 67°

NOBA 40




SPOTLIGHT ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405lm	030-6800::3
	3000 K	421lm	
	4000 K	441lm	




DOWNLIGHT SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405lm	030-6900::3
	3000 K	421lm	
	4000 K	441lm	



SPOTLIGHT ADJUSTABLE FLEX


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405lm	030-7800::3
	3000 K	421lm	
	4000 K	441lm	



DOWNLIGHT SUSPENDED FLEX


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405lm	030-7900::3
	3000 K	421lm	
	4000 K	441lm	

NOBA 50



DOWNLIGHT SUSPENDED


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.1 W	2700 K	819lm	030-6910::3
	3000 K	851lm	
	4000 K	891lm	



DOWNLIGHT SUSPENDED FLEX


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.1 W	2700 K	819lm	030-6910::3
	3000 K	851lm	
	4000 K	891lm	

NOBA 60



SPOTLIGHT ADJUSTABLE


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1 W	2700 K	961lm	030-6820::3
	3000 K	999lm	
	4000 K	1050lm	



DOWNLIGHT SUSPENDED


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1 W	2700 K	961lm	030-6920::3
	3000 K	999lm	
	4000 K	1050lm	

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white



SPOTLIGHT ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1W	2700K	961lm	030-7820::3
	3000K	999lm	
	4000K	1050lm	



DOWNLIGHT SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1W	2700K	961lm	030-7920::3
	3000K	999lm	
	4000K	1050lm	

Mounting accessories



HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 up to 2200 lm | 131lm/W
 DALI-2

Types

BO PRO 35 BO PRO 45 BO PRO 55



Colours



Light distributions



changeable optic and accessories



flush adapter mounting



flex inset for curve elements



oval lens for oval light illumination



365° rotatable 135° tiltable

BO PRO

spotlight inset 10

Order options

COLOUR TEMPERATURE	
2700K	4
3000K	5
3500K	7
4000K	6




CONTROL	
DALI-2	

MATERIAL COLOUR	
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE	
BO PRO 35	▲
spot 20°	S
medium 30°	M
flood 38°	F
wide flood 50°	W

BO PRO 45	▲
spot 20°	S
medium 31°	M
flood 39°	F
wide flood 50°	W

BO PRO 55	▲
spot 20°	S
medium 24°	M
flood 37°	F
wide flood 46°	W



BO PRO 35



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.7 W	4000 K	836 lm	030-5500::3▲▲

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.7 W	4000 K	836 lm	030-8500::3▲▲

BO PRO 45



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.0 W	4000 K	1425 lm	030-5510::3▲▲

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.0 W	4000 K	1425 lm	030-8510::3▲▲

BO PRO 55



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4 W	4000 K	2200 lm	030-5520::3▲▲

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4 W	4000 K	2200 lm	030-8520::3▲▲

Accessories

HONEYCOMB LOUVER black

TYPE	ORDER CODE
BO PRO 35	007-1975168
BO PRO 45	007-1975188
BO PRO 55	007-1975198

OVAL LENS

TYPE	ORDER CODE
BO PRO 35	007-1975860
BO PRO 45	007-1975880
BO PRO 55	007-1975890

SOFT LENS

TYPE	ORDER CODE
BO PRO 35	007-1975960
BO PRO 45	007-1975980
BO PRO 55	007-1975990

SOFT LENS

TYPE	ORDER CODE
BO PRO 35	007-1975760
BO PRO 45	007-1975780
BO PRO 55	007-1975790

EXCHANGEABLE LENS

TYPE	ORDER CODE
BO PRO 35	005-541221▲
BO PRO 45	005-541231▲
BO PRO 55	005-541241▲


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for 4000K, CRI ≥ 90, colour white, medium 2700K -5%, 3000K -2%, 3500K -1%



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 3 SDCM
 up to 3250 lm | 153 lm/W
 UGR ≤ 19 / 65° ≤ 1500 cd/m²
 L90 @ 50 000 h
 DALI-2
 louver, spotline

Types

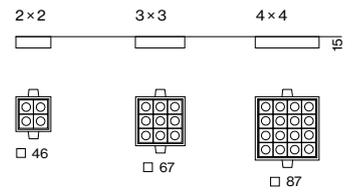

Colours



Light distribution



CUBIS

inset



single luminaire available



high efficiency up to 153lm/W

Order options

COLOUR TEMPERATURE

2700K	9
3000K	0
3500K	2
4000K	1

CONTROL

DALI-2

HOUSING COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8


LOUVER COLOUR

chrome reflector	4
black reflector	8

SPOTLINE COLOUR

traffic white RAL 9016	7
jet black RAL 9005	8


CUBIS 2x2



LOUVER | SUPER WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
2.3W, 200mA	3000K	335lm	030-5600 


SPOTLINE | MEDIUM

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
2.3W, 200mA	3000K	325lm	030-5700 


SPOTLINE | WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
2.3W, 200mA	3000K	325lm	030-5700 

CUBIS 3x3



LOUVER | SUPER WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.1W, 200mA	3000K	750lm	030-5610 


SPOTLINE | MEDIUM

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.1W, 200mA	3000K	730lm	030-5710 


SPOTLINE | WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.1W, 200mA	3000K	730lm	030-5710 


CUBIS 4x4




LOUVER | SUPER WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
9.0W, 400mA	3000K	1340lm	030-5620 

SPOTLINE | MEDIUM

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
9.0W, 400mA	3000K	1300lm	030-5720 

SPOTLINE | WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
9.0W, 400mA	3000K	1300lm	030-5720 

LUMINOUS FLUX value calculated for
3000K, CRI ≥ 90, louver chrome or spotline white
2700K -4%, 3500K +6%, 4000K +6%