

## MOVE IT 10 system

recessed trimless/surface


**EN** Thin extruded aluminium profile with 16 mm (trimless) or 11 mm (surface) height and 10 mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; MOVE IT 10 trimless profile with processing protection against penetration of filler; or for wall-/ceiling surface mounting; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of FLEX or LEVEL connectors; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

**FR** Profilé bas extrudé en aluminium de 16 mm (trimless) ou 11 mm (surface) de haut et largeur de joint de 10 mm ; au choix pour un encastrement sans bord dans des plafonds en placo-plâtre (montage mural ou au plafond) d'une épaisseur de 12,5 mm ; profilé MOVE IT 10 trimless avec protection de finition contre les infiltrations d'enduit ; ou pour un montage en surface au mur ou au plafond ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs FLEX ou LEVEL ; avec profil de rail intégré pour fixation d'alimentation électrique et signal DALI-2 ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


### Quickinfo

2700K, 3000K, 4000K  
 CRI ≥ 90  
 L90 @ 50 000h  
 DALI-2


### Types



### Configurations

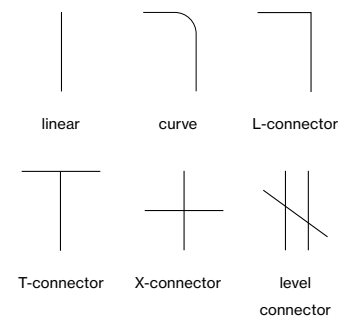

### Colours



custom cut on building site

## Order options

### CONTROL

DALI-2

### MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P 8
- jet black RAL 9005 8

### MATERIAL COLOUR

#### ACCESSORIES

- traffic white\* RAL 9016 7
- jet black RAL 9005 8



\*mechanical connectors are always traffic white / jet black accept mechanical recessed trimless

## Options on request

### CONNECTOR

- T connector mechanical
  - X connector mechanical
- only for recessed trimless

## MOVE IT 10 trimless





### INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-1113038
2100	channel	030-1115038
3100	channel	030-1117038
custom cut	channel	E83610.....8



### END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-1120018
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical*	030-2121138
X connector electrical*	030-2131138
linear connector mechanical	030-1134018
L connector mechanical	030-1135018

\*when using T and X connector mechanical more electrical and mechanical connectors see p. 19



## MOVE IT 10 surface





### INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-1213034
2100	channel	030-1215034
3100	channel	030-1217034
custom cut	channel	E83620.....4
R 300	curve channel	030-1231034
R 500	curve channel	030-1232034

### END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-1220014
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical	030-2121138
X connector electrical	030-2131138
linear connector mechanical	030-1234014
L connector mechanical	030-1235014
T connector mechanical	030-1236014
X connector mechanical	030-1237014

more electrical and mechanical connectors see p. 19



## Accessories

### BLIND COVER

L (mm)		ORDER CODE
1100	blind cover	030-1003014
2100	blind cover	030-1005014
3100	blind cover	030-1007014
custom cut	blind cover	E83600.....4



### ELECTRICAL ACCESSORIES

TYPE	ORDER CODE
power feeder (only for surface)	030-2523038
internal power feeder (incl. cable 2000 mm)	030-2525038

### MOUNTING ACCESSORY

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000

guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector





## MOVE IT 10 system

suspended


**EN** Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for suspended mounting (cable suspension, height adjustment without tools, incl. black feed); with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

**FR** Profilé bas extrudé en aluminium avec largeur de joint de 10 mm ; forme angulaire (24 mm de haut) ou tubulaire (26 mm de haut) au choix ; pour montage suspendu (suspension par câble, réglage en hauteur sans outil, câble d'alimentation noir inclus) ; avec profilé de rail d'alimentation intégré des deux côtés pour la tension d'alimentation et le signal DALI-2 ; alimentation et signal DALI-2 pour les deux rails avec arrivée unique grâce à des connecteurs de type PASS THROUGH ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


### Quickinfo

2700K, 3000K, 4000K  
CRI ≥ 90  
L90 @ 50 000h  
DALI-2


### Types



### Configurations



### Colours



custom cut on building site

### Order options

#### CONTROL

DALI-2

#### MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P 8
- jet black RAL 9005 8

#### MATERIAL COLOUR ACCESSORIES


- traffic white\* RAL 9016 7
- jet black RAL 9005 8

\*mechanical connectors are traffic white / jet black

#### MATERIAL COLOUR CABLE SUSPENSION

- chrome 4
- jet black RAL 9005 8

### MOVE IT 10 square suspended




#### INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-131303
2100	channel	030-131503
3100	channel	030-131703
custom cut	channel	E83630
R 300	curve channel	030-133103
R 500	curve channel	030-133203


#### END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-132001
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical	030-2121138
X connector electrical	030-2131138
linear connector mechanical	030-133401
L connector mechanical	030-133501
T connector mechanical	030-133601
X connector mechanical	030-133701

more electrical and mechanical connectors see page 19

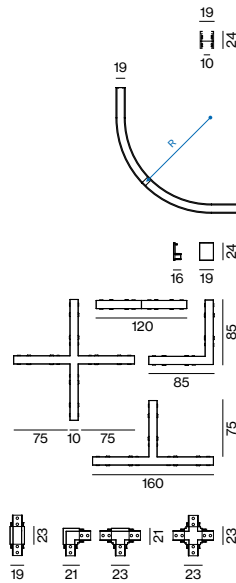

### MOVE IT 10 round suspended




#### INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-141303
2100	channel	030-141503
3100	channel	030-141703
custom cut	channel	E83640
R 300	curve channel	030-143103
R 500	curve channel	030-143203

#### END CAPS / CONNECTORS

TYPE	ORDER CODE
end caps (pair)	030-142001
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical	030-2121138
X connector electrical	030-2131138
linear connector mechanical	030-143401
L connector mechanical	030-143501
T connector mechanical	030-143601
X connector mechanical	030-143701

more electrical and mechanical connectors see page 19

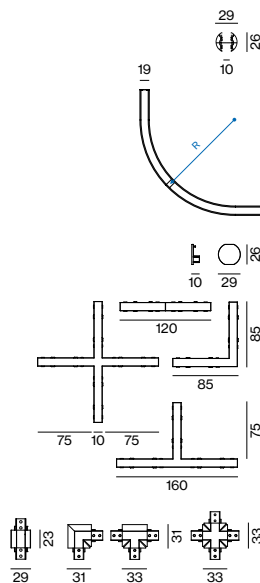

### Accessories

BLIND COVER see page 17


INDIRECT LIGHT INSET see page 17

#### CABLE SUSPENSION / CANOPY / ELECTRICAL ACCESSORIES

TYPE	L (mm)	ORDER CODE
cable suspension	1500	030-223001
cable susp. linear connector	1500	030-221001
cable susp. linear conn. electrical	1500	030-222001
canopy square	90-90-22	005-231171
canopy round	ø90-22	005-260073
internal power feeder (incl. cable 2000mm)		030-2525038
pass through connector electrical (pair)		030-2171138
3-in-1 mounting tool*		030-2611000

\*guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector

more electrical and mechanical connectors see page 19





## MOVE IT 10 system

pole


**EN** Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for vertical and horizontal mounting; easy installation of the mounting set, incl. feed; with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

**FR** Profilé bas extrudé en aluminium avec largeur de joint de 10 mm ; forme angulaire (24 mm de haut) ou tubulaire (26 mm de haut) au choix ; pour montage vertical et horizontal ; simplicité d'installation du kit de montage, alimentation comprise ; avec profilé de rail d'alimentation intégré des deux côtés pour la tension d'alimentation et le signal DALI-2 ; alimentation et signal DALI-2 pour les deux rails avec arrivée unique grâce à des connecteurs de type PASS THROUGH ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


### Quickinfo

2700K, 3000K, 4000K  
CRI ≥ 90  
L90 @ 50 000h  
DALI-2


### Types



### Mounting types

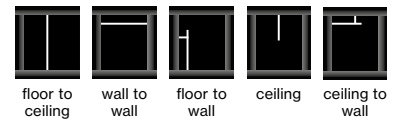

### Colours



custom cut on building site

### Order options

#### COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6

#### CONTROL

DALI-2	
--------	--

#### MATERIAL COLOUR

● traffic white 9016 / jet black 9005 P	
● jet black RAL 9005	8

#### MATERIAL COLOUR ACCESSORIES

○ traffic white* RAL 9016	7
● jet black RAL 9005	8

\*mechanical connectors are traffic white/jet black

### MOVE IT 10 square pole



#### INSTALLATION TRACK


L (mm)		ORDER CODE
1100	channel	030-131303
2100	channel	030-131503
3100	channel	030-131703
custom cut	channel	E83630

#### MOUNTING SET



TYPE	ORDER CODE
floor to ceiling set (pair)	030-134101
wall to wall set (pair)	030-134101
floor to wall set (wall bracket 400 mm incl. end cap)	030-134201
ceiling set (incl. end cap)	030-134301

### MOVE IT 10 round pole



#### INSTALLATION TRACK


L (mm)		ORDER CODE
1100	channel	030-141303
2100	channel	030-141503
3100	channel	030-141703
custom cut	channel	E83640

#### MOUNTING SET



TYPE	ORDER CODE
floor to ceiling set (pair)	030-144101
wall to wall set (pair)	030-144101
floor to wall set (wall bracket 400 mm incl. end cap)	030-144201
ceiling set (incl. end cap)	030-144301

### LIGHT INSET 10



#### INDIRECT incl. feeder


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
15.8 W	2700 K	1080 lm	1000	030-6330
	3000 K	1140 lm		
	4000 K	1190 lm		
32 W	2700 K	2170 lm	2000	030-6370
	3000 K	2280 lm		
	4000 K	2390 lm		

### Accessories

#### BLIND COVER


L (mm)		ORDER CODE
1100	blind cover	030-100301
2100	blind cover	030-100501
3100	blind cover	030-100701
custom cut	blind cover	E83600

#### ELECTRICAL ACCESSORIES



TYPE	ORDER CODE
internal power feeder (incl. cable 2000 mm)	030-2525038
pass through connector electrical (pair)	030-2171138

#### MOUNTING ACCESSORY



TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000
guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector	

**INSET POWER** is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI ≥ 90, colour black






**Types**

- 1 Linear Connector
- 2 L-Connector
- 3 T-Connector
- 4 X-Connector
- 5 Flex Connector
- 6 Ceiling to Wall Connector
- 7 Level Connector
- 8 Pass Through Connector

**Configurations**

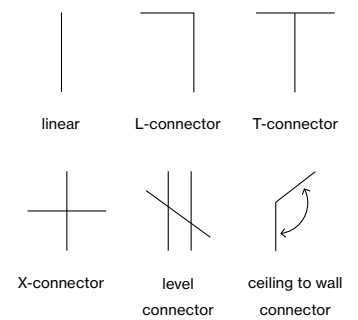

**Colours**



**ELECTRICAL accessories**

MOVE IT 10 system

**EN** Mechanical and electrical connectors to MOVE IT 10 system; in L-, T- or X-shape; or FLEX, CEILING TO WALL or LEVEL connectors, as well as PASS THROUGH connectors; for flexible system design; different converters for the entire MOVE IT system

**FR** Connecteurs mécaniques et électriques pour système MOVE IT 10 ; en L, T ou X ; ou connecteurs FLEX, CEILING TO WALL ou LEVEL, ainsi que connecteurs PASS THROUGH ; pour structure de système flexible ; différents convertisseurs pour le système MOVE IT complet

### Order options

<b>CONNECTOR MECHANICAL</b>	<b>T</b>
recessed*	1
surface	2
suspended square	3
suspended round	4

\*T- and X-connector on request

### CONTROL

DALI-2	
--------	--

### MATERIAL COLOUR ACCESSORIES

○ traffic white* RAL 9016	7
● jet black RAL 9005	8

\*mechanical connectors are always traffic white/jet black accept mechanical recessed trimless

### Options on request

#### CONNECTOR

T connector mechanical	
X connector mechanical	
only for recessed trimless	

### Electrical accessories

#### LINEAR CONNECTOR

<b>TYPE</b>		<b>ORDER CODE</b>
linear connector electrical		030-2101138
linear connector mechanical		030-1 T 3401 ■

#### L CONNECTOR

<b>TYPE</b>		<b>ORDER CODE</b>
L connector electrical		030-2111138
L connector mechanical		030-1 T 3501 ■

#### T CONNECTOR

<b>TYPE</b>		<b>ORDER CODE</b>
T connector electrical		030-2121138
T connector mechanical		030-1 T 3601 ■

#### X CONNECTOR

<b>TYPE</b>		<b>ORDER CODE</b>
X connector electrical		030-2131138
X connector mechanical		030-1 T 3701 ■

#### FLEX/CEILING TO WALL / LEVEL / PASS THROUGH C. / MOUNTING

<b>TYPE</b>		<b>ORDER CODE</b>
flex connector electrical		030-2141138
ceiling to wall connector electrical		030-2161138
level connector electrical		030-2151138
level connector mechanical		030-2351118
pass through connector electrical (pair)		030-2171138
electrical connection from direct to indirect and vice versa		
3-in-1 mounting tool		030-2611000

guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector

#### POWER FEEDER

<b>TYPE</b>		<b>ORDER CODE</b>
power feeder (only for surface)		030-2523038
internal power feeder (incl. cable 2000mm)		030-2525038

#### POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz

<b>TYPE</b>	<b>EFFICIENCY</b>	<b>MOUNTING</b>	<b>L-W-H (mm)</b>	<b>ORDER CODE</b>
100 W □ PC II η 92 %		external	350-30-18	002-62134
150 W □ PC II η 92 %		external	350-30-18	002-62135
250 W □ PC II η 93 %		external	400-40-22	002-62139

ENEC approved, incl. feeder cable 2000 mm

#### POWER SUPPLY BASIC 48 V

220-240 V | 50-60 Hz | □ PC II | Lifetime @ 120W, 45° ambient temp. cascable max. 3 devices

<b>TYPE</b>	<b>EFFICIENCY/LIFETIME</b>	<b>W-H-D (mm)</b>	<b>ORDER CODE</b>
160 W	η 94.5% / > 100.000 h	72-90-63	005-6520210

#### DIN RAIL POWER SUPPLY PRO 48 V













220-240 V | 50-60 Hz | ⊕ PC I | MTBF @ 55° ambient temperature cascable max. 5 devices (240W) or 3 devices (480W)

<b>TYPE</b>	<b>EFFICIENCY/MTBF</b>	<b>W-H-D (mm)</b>	<b>ORDER CODE</b>
240 W	η 92 % / > 400.000 h	60-125-100	005-6220110
480 W	η 93 % / > 350.000h	120-125-100	005-6220210

#### DALI-2 SELV DEVICE

<b>TYPE</b>	<b>L-W-H (mm)</b>	<b>ORDER CODE</b>
control unit	213-37-25	050-2061130

necessary to create DALI-2 SELV signal; DALI power supply integrated






**Quickinfo**


2700 K, 3000 K, 4000 K  
 CRI ≥ 90  
 up to 105lm/W  
 DALI-2

**Types**



spot line



opal



indirect

**Colour****Light distributions**

spot line

opal


indirect



DESIGN  
AWARD  
2023

**SPOT LINE / OPAL**

linear inset 10



flush  
mounted

### Order options

**COLOUR TEMPERATURE**

2700 K	4
3000 K	5
4000 K	6

**CONTROL**

DALI-2



**MATERIAL COLOUR**

● jet black RAL 9005

**LIGHT OPTIC**


- spot line
- opal high performance
- indirect

### LIGHT INSET 10




**SPOT LINE**

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
6.6 W	2700 K	575lm	300	030-6110::38M
	3000 K	601lm		
	4000 K	601lm		



**OPAL HIGH PERFORMANCE**

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5 W	2700 K	520lm	500	030-6120::38H
	3000 K	520lm		
	4000 K	525lm		




**INDIRECT** incl. feeder

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
15.8 W	2700 K	1080lm	1000	030-6330::38M
	3000 K	1140lm		
	4000 K	1190lm		
32 W	2700 K	2170lm	2000	030-6370::38M
	3000 K	2280lm		
	4000 K	2390lm		


**MOUNTING ACCESSORY**

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000

for custom cut tracks, Indirect light inset and Pass Through connector



**INSET POWER** is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI≥90, colour black

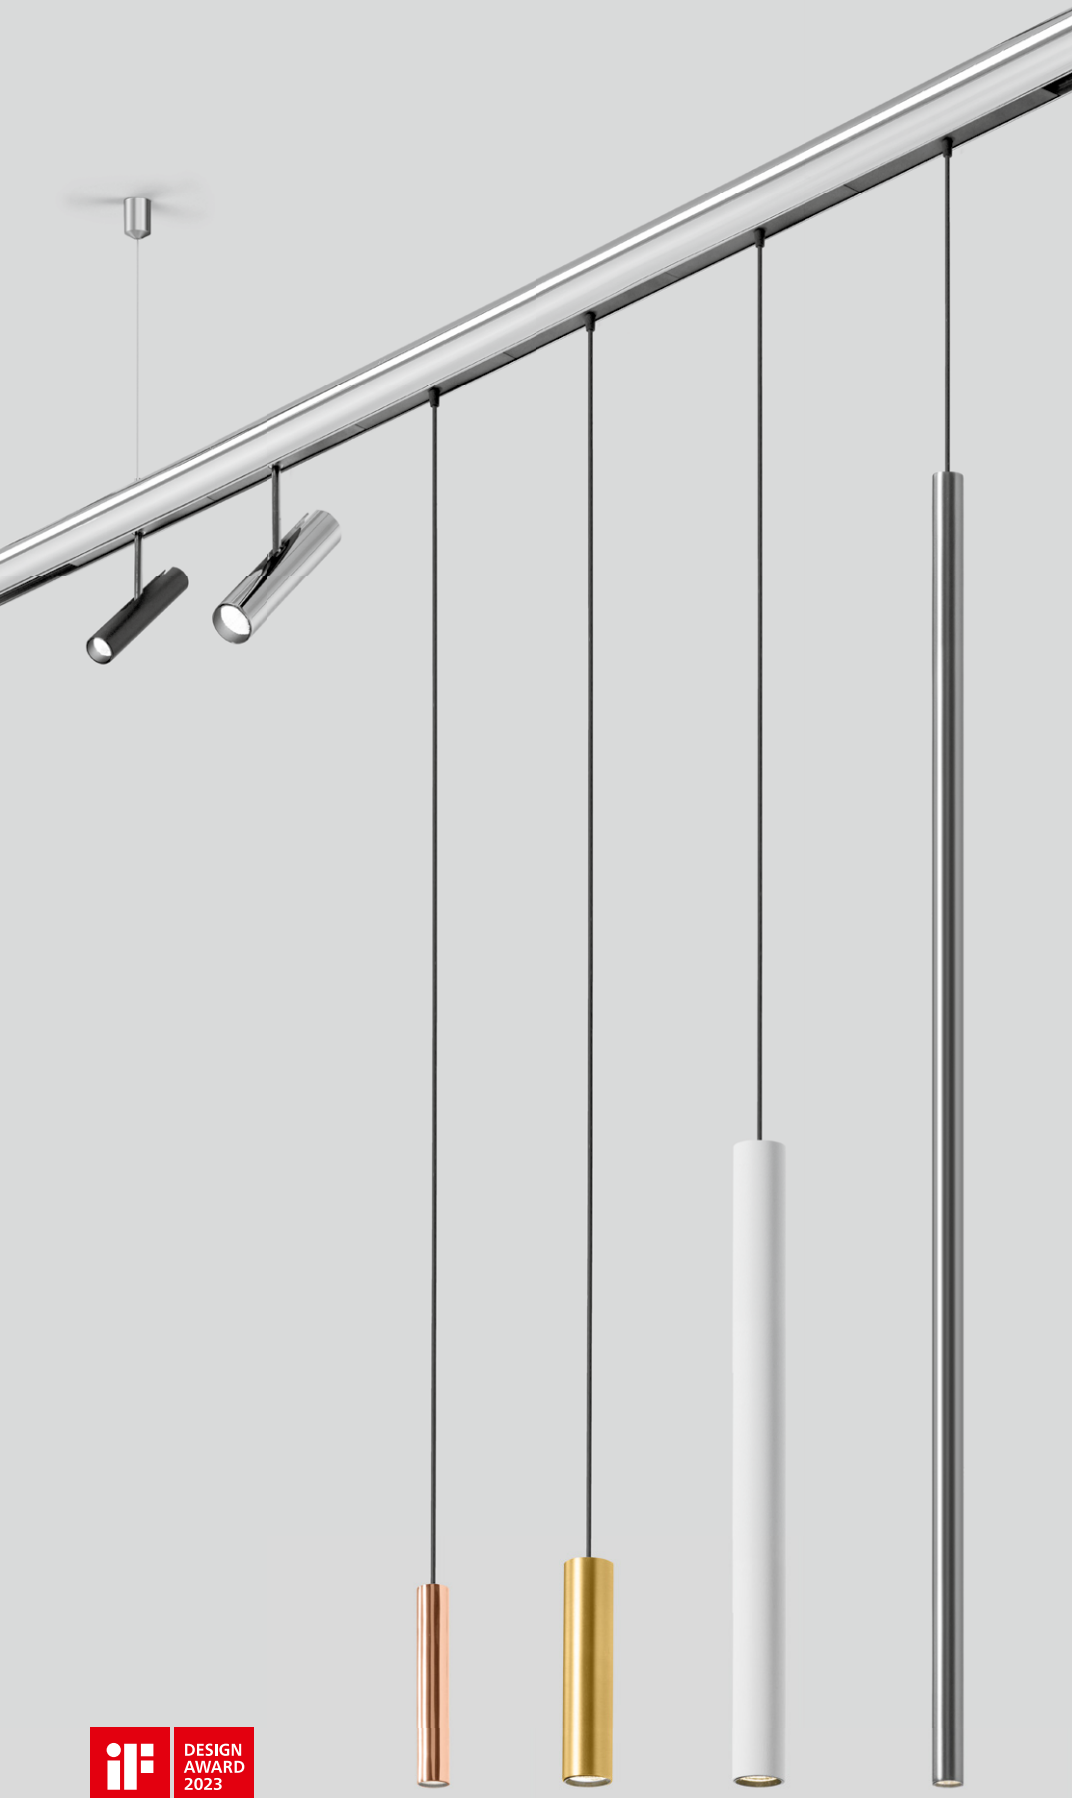


**Quickinfo**


2700 K, 3000 K, 4000 K  
 CRI ≥ 90  
 up to 91lm/W  
 DALI-2

**Types**

adjustable rod



suspended

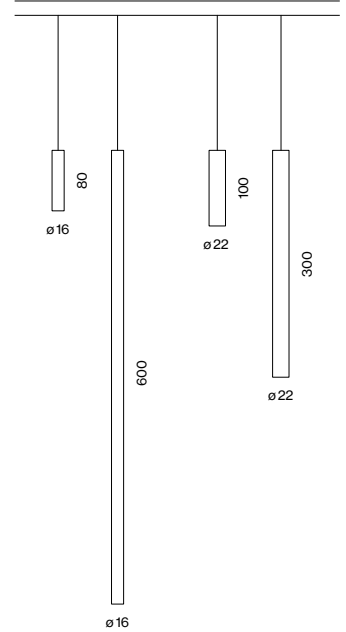

**Colours**




**Light distributions**


TILA 16



TILA 22/32



365° rotatable  
 135° tiltable



free positioning by  
 cable and hook



flush adapter  
 mounting



DESIGN  
 AWARD  
 2023

**TILA**

decorative inset 10

## Order options

HOUSING HEIGHT TILA 16	L
80 mm	0
600 mm	1

HOUSING HEIGHT TILA 22	L
100 mm	3
300 mm	4

COLOUR TEMPERATURE	∴
2700 K	4
3000 K	5
4000 K	6

### CONTROL

DALI-2


MATERIAL COLOUR	☑
○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9

MATERIAL COLOUR ACCESSORIES	■
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE TILA 16	▲
medium 23°	M
flood 31°	F


BEAM ANGLE TILA 22/32	▲
spot 15/17°	S
medium 26/24°	M
flood 43/34°	F

## TILA 16



### ADJUSTABLE


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	177 lm	030-6500 ∴ 3 ▲
	3000 K	177 lm	
	4000 K	190 lm	



### SUSPENDED


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	177 lm	030-66 L 0 ∴ 3 ▲
	3000 K	177 lm	
	4000 K	190 lm	

## TILA 22



### ADJUSTABLE



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.6 W	2700 K	385 lm	030-6530 ∴ 3 ▲
	3000 K	392 lm	
	4000 K	427 lm	



### SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.6 W	2700 K	385 lm	030-66 L 0 ∴ 3 ▲
	3000 K	392 lm	
	4000 K	427 lm	

## TILA 32



### ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.7 W	2700 K	788 lm	030-6560 ∴ 3 ▲
	3000 K	837 lm	
	4000 K	887 lm	

## Mounting accessories

### HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001 ■



## Optical accessories

### HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
TILA 22	20-3	007-1965118
TILA 32	30-3	007-1965168

**INSET POWER** is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI ≥ 90, colour white, medium




**Quickinfo**


2700 K, 3000 K, 4000 K  
 CRI ≥ 90  
 up to 96lm/W  
 DALI-2

**Types**

square track



round track



**Colours**



**Light distributions**

TARO 32



TARO 45



**TARO**  
 decorative inset 10



wallwasher floor  
 360° rotatable



wallwasher  
 floor

## Order options

### COLOUR TEMPERATURE ◆◆

2700 K	4
3000 K	5
4000 K	6

### CONTROL

DALI-2	
--------	--

### MATERIAL COLOUR ▣

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9



### BEAM ANGLE TARO 32 ▲

spot 17°	S
medium 24°	M
flood 34°	F

### BEAM ANGLE TARO 45 ▲


medium 24°	M
flood 36°	F

## TARO 32



### DOWNLIGHT SQUARE TRACK



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.6 W	2700 K	764lm	030-6700 <span style="color: blue;">◆◆</span> 3 <span style="color: blue;">▲</span>
	3000 K	811lm	
	4000 K	859lm	



### DOWNLIGHT ROUND TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.6 W	2700 K	764lm	030-6740 <span style="color: blue;">◆◆</span> 3 <span style="color: blue;">▲</span>
	3000 K	811lm	
	4000 K	859lm	

## TARO 45



### DOWNLIGHT SQUARE TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11 W	2700 K	949lm	030-6710 <span style="color: blue;">◆◆</span> 3 <span style="color: blue;">▲</span>
	3000 K	1010lm	
	4000 K	1060lm	



### DOWNLIGHT ROUND TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11 W	2700 K	949lm	030-6750 <span style="color: blue;">◆◆</span> 3 <span style="color: blue;">▲</span>
	3000 K	1010lm	
	4000 K	1060lm	

## TARO 45 wallwasher floor



### WALLWASHER FLOOR SQUARE TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11 W	2700 K	733lm	030-6780 <span style="color: blue;">◆◆</span> 3 <span style="color: blue;">▲</span> W
	3000 K	791lm	
	4000 K	791lm	



### WALLWASHER FLOOR ROUND TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11 W	2700 K	733lm	030-6790 <span style="color: blue;">◆◆</span> 3 <span style="color: blue;">▲</span> W
	3000 K	791lm	
	4000 K	791lm	


## Optical accessories

### HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30-4	007-1965168
TARO 45	42-3	007-1965188

**INSET POWER** is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI≥90, colour white, medium




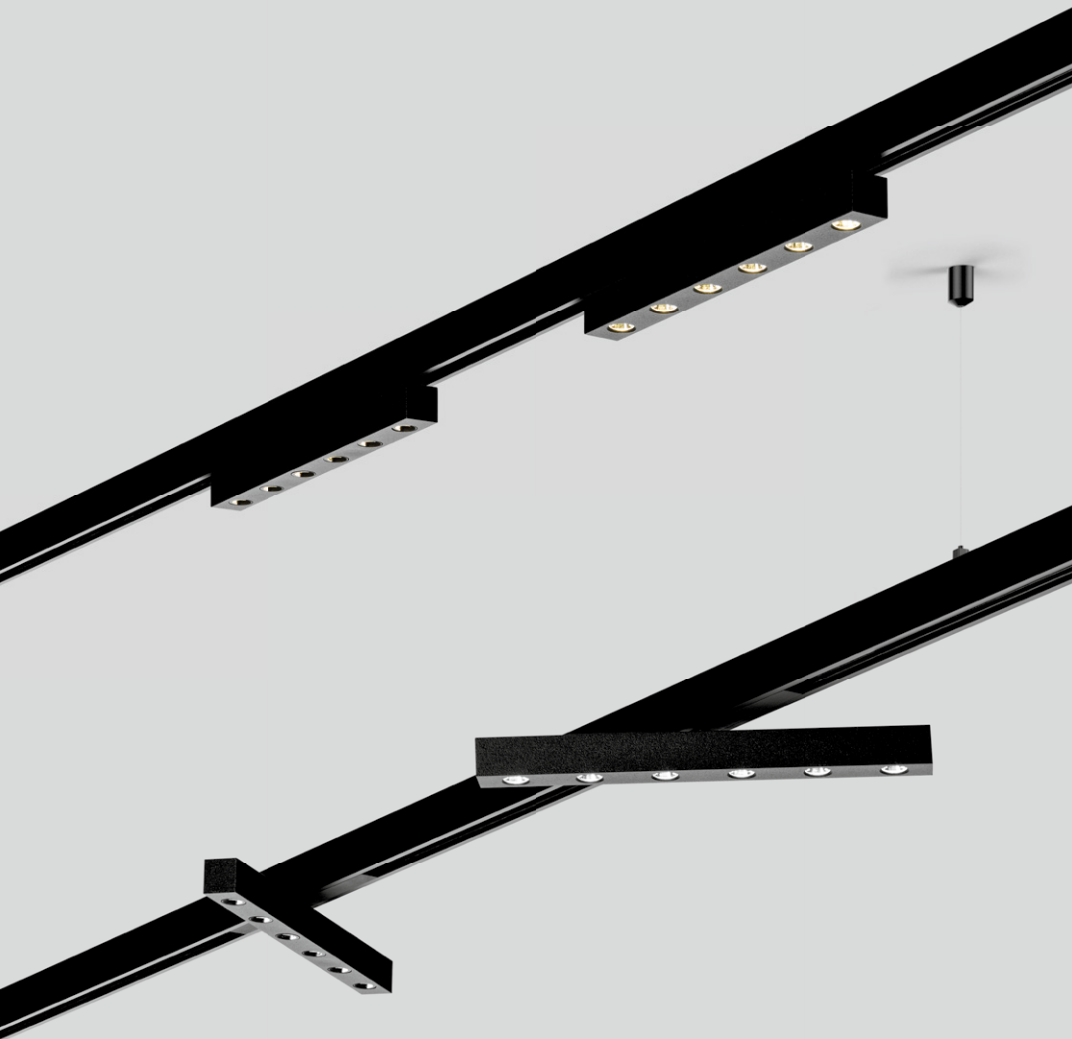

**Quickinfo**

2700 K, 3000 K, 4000 K  
 CRI ≥ 90  
 up to 77 lm/W  
 DALI-2

**Type**



**Colours**



**Light distributions**



**GIRA**  
 decorative inset 10



360°  
 rotatable



wallwasher  
 floor

## Order options

### COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6

### CONTROL

DALI-2



### MATERIAL COLOUR

<input type="radio"/> traffic white RAL 9016	7
<input checked="" type="radio"/> jet black RAL 9005	8

### BEAM ANGLE

medium 23°	M
flood 34°	F



## GIRA



### DOWNLIGHT ROTATABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
18.2 W	2700 K	1160 lm	0 3 0 - 6 4 1 0 :: 3
	3000 K	1160 lm	
	4000 K	1240 lm	

## GIRA wallwasher floor



### WALLWASHER FLOOR ROTATABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
19.1 W	2700 K	1260 lm	0 3 0 - 6 4 3 0 :: 3   W
	3000 K	1370 lm	
	4000 K	1480 lm	


**INSET POWER** is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI ≥ 90, colour white, medium



**Quickinfo**

2700 K, 3000 K, 4000 K  
 CRI ≥ 90  
 up to 129lm/W  
 DALI-2

**Types**



**Colours**




**Light distribution**



**NOBA**  
 decorative inset 10



365° rotatable  
 90° tiltable



free positioning by  
 cable and hook



high quality  
 glass lens

## Order options

### COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6

### CONTROL

DALI-2	
--------	--

### MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9


### MATERIAL COLOUR ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8




### BEAM ANGLE


wide flood 67°	
----------------	--

## NOBA 40






### SPOTLIGHT ADJUSTABLE



INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	403 lm	030-6800   
	3000 K	428 lm	
	4000 K	452 lm	






### DOWNLIGHT SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	403 lm	030-6900   
	3000 K	428 lm	
	4000 K	452 lm	


## NOBA 50






### DOWNLIGHT SUSPENDED


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.2 W	2700 K	747 lm	030-6910   
	3000 K	793 lm	
	4000 K	838 lm	

## NOBA 60






### SPOTLIGHT ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1 W	2700 K	851 lm	030-6820   
	3000 K	903 lm	
	4000 K	955 lm	



### DOWNLIGHT SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1 W	2700 K	851 lm	030-6920   
	3000 K	903 lm	
	4000 K	955 lm	

## Mounting accessories



### HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001 

**INSET POWER** is the current consumption excluding any ballast  
**LUMINOUS FLUX** value calculated for CRI≥90, colour white