



MOVE IT 10 system

recessed trimless/surface


EN Thin extruded aluminium profile with 16 mm (trimless) or 11 mm (surface) height and 10 mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ceiling surface mounting; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of FLEX or LEVEL connectors; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profilé bas extrudé en aluminium de 16 mm (trimless) ou 11 mm (surface) de haut et largeur de joint de 10 mm ; au choix pour un encastrement sans bord dans des plafonds en placo-plâtre (montage mural ou au plafond) d'une épaisseur de 12,5 mm ; ou pour un montage en surface au mur ou au plafond ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs FLEX ou LEVEL ; avec profil de rail intégré pour fixation d'alimentation électrique et signal DALI-2 ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90
 L90 @ 50 000h
 DALI-2


Types

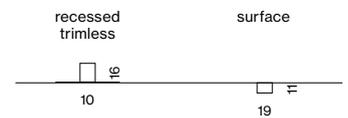

Configurations

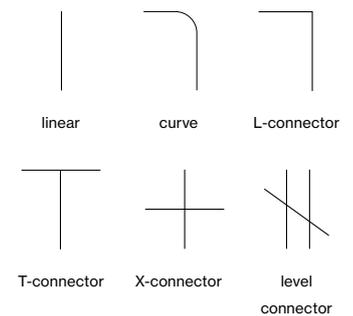

Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P
- jet black RAL 9005

MATERIAL COLOUR

ACCESSORIES

- traffic white* RAL 9016
- jet black RAL 9005



*mechanical connectors are always traffic white / jet black accept mechanical recessed trimless

Options on request

CONNECTOR

- T connector mechanical
 - X connector mechanical
- only for recessed trimless

MOVE IT 10 trimless




INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|------------|---------|------------------|
| 1100 | channel | 030-1113038 |
| 2100 | channel | 030-1115038 |
| 3100 | channel | 030-1117038 |
| custom cut | channel | E83610 8 |



END CAPS / CONNECTORS

| TYPE | ORDER CODE |
|-----------------------------|-------------|
| end caps (pair) | 030-1120018 |
| linear connector electrical | 030-2101138 |
| L connector electrical | 030-2111138 |
| T connector electrical* | 030-2121138 |
| X connector electrical* | 030-2131138 |
| linear connector mechanical | 030-1134018 |
| L connector mechanical | 030-1135018 |

*when using T and X connector mechanical more electrical and mechanical connectors see p. 21



MOVE IT 10 surface




INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|------------|---------------|------------------|
| 1100 | channel | 030-1213038 |
| 2100 | channel | 030-1215038 |
| 3100 | channel | 030-1217038 |
| custom cut | channel | E83620 8 |
| R 300 | curve channel | 030-1231038 |
| R 500 | curve channel | 030-1232038 |

END CAPS / CONNECTORS

| TYPE | ORDER CODE |
|-----------------------------|-------------|
| end caps (pair) | 030-1220018 |
| linear connector electrical | 030-2101138 |
| L connector electrical | 030-2111138 |
| T connector electrical | 030-2121138 |
| X connector electrical | 030-2131138 |
| L connector mechanical | 030-1235018 |
| T connector mechanical | 030-1236018 |
| X connector mechanical | 030-1237018 |

more electrical and mechanical connectors see p. 21

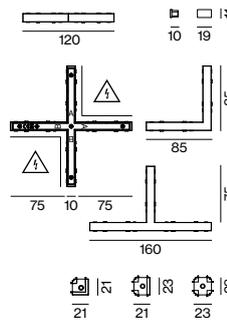

Accessories

BLIND COVER

| L (mm) | | ORDER CODE |
|------------|-------------|------------------|
| 1100 | blind cover | 030-1003018 |
| 2100 | blind cover | 030-1005018 |
| 3100 | blind cover | 030-1007018 |
| custom cut | blind cover | E83600 8 |


ELECTRICAL ACCESSORIES

| TYPE | ORDER CODE |
|--|-------------|
| power feeder (only for surface) | 030-2523038 |
| internal power feeder (incl. cable 2000mm) | 030-2525038 |
| internal power feeder (incl. cable 5000mm) | 030-2525138 |

MOUNTING ACCESSORY

| TYPE | ORDER CODE |
|----------------------|-------------|
| 3-in-1 mounting tool | 030-2611000 |

guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector





MOVE IT 10 system

suspended


EN Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for suspended mounting (cable suspension, height adjustment without tools, incl. black feed); with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profilé bas extrudé en aluminium avec largeur de joint de 10 mm ; forme angulaire (24 mm de haut) ou tubulaire (26 mm de haut) au choix ; pour montage suspendu (suspension par câble, réglage en hauteur sans outil, câble d'alimentation noir inclus) ; avec profilé de rail d'alimentation intégré des deux côtés pour la tension d'alimentation et le signal DALI-2 ; alimentation et signal DALI-2 pour les deux rails avec arrivée unique grâce à des connecteurs de type PASS THROUGH ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000h
DALI-2


Types



Configurations

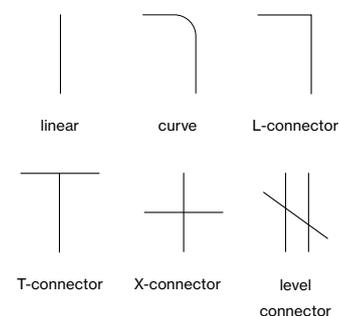

Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P
- jet black RAL 9005

MATERIAL COLOUR ACCESSORIES


- traffic white* RAL 9016
- jet black RAL 9005

*mechanical connectors are traffic white / jet black

MATERIAL COLOUR CABLE SUSPENSION

- chrome
- jet black RAL 9005
- traffic white 9016 / chrome

MOVE IT 10 square suspended




INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|------------|---------------|------------|
| 1100 | channel | 030-131303 |
| 2100 | channel | 030-131503 |
| 3100 | channel | 030-131703 |
| custom cut | channel | E83630 |
| R 300 | curve channel | 030-133103 |
| R 500 | curve channel | 030-133203 |


END CAPS / CONNECTORS

| TYPE | ORDER CODE |
|-----------------------------|-------------|
| end caps (pair) | 030-132001 |
| linear connector electrical | 030-2101138 |
| L connector electrical | 030-2111138 |
| T connector electrical | 030-2121138 |
| X connector electrical | 030-2131138 |
| linear connector mechanical | 030-2300018 |
| L connector mechanical | 030-133501 |
| T connector mechanical | 030-133601 |
| X connector mechanical | 030-133701 |

more electrical and mechanical connectors see page 21

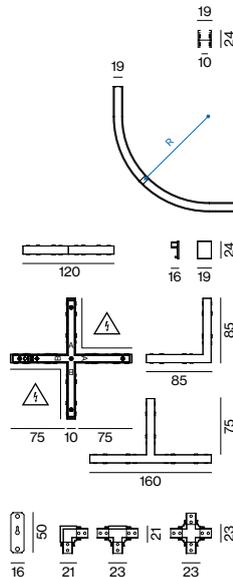

MOVE IT 10 round suspended




INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|------------|---------------|------------|
| 1100 | channel | 030-141303 |
| 2100 | channel | 030-141503 |
| 3100 | channel | 030-141703 |
| custom cut | channel | E83640 |
| R 300 | curve channel | 030-143103 |
| R 500 | curve channel | 030-143203 |

END CAPS / CONNECTORS

| TYPE | ORDER CODE |
|-----------------------------|-------------|
| end caps (pair) | 030-142001 |
| linear connector electrical | 030-2101138 |
| L connector electrical | 030-2111138 |
| T connector electrical | 030-2121138 |
| X connector electrical | 030-2131138 |
| linear connector mechanical | 030-2300018 |
| L connector mechanical | 030-143501 |
| T connector mechanical | 030-143601 |
| X connector mechanical | 030-143701 |

more electrical and mechanical connectors see page 21

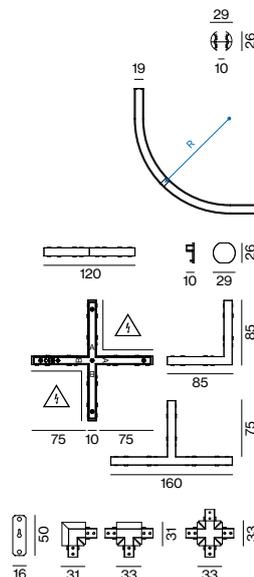

Accessories


BLIND COVER see page 19

INDIRECT LIGHT INSET see page 19

CABLE SUSPENSION / CANOPY / ELECTRICAL ACCESSORIES

| TYPE | L (mm) | ORDER CODE |
|--|----------|-------------|
| cable suspension | 1500 | 030-223001 |
| cable susp. linear connector | 1500 | 030-221001 |
| cable susp. linear conn. electrical | 1500 | 030-222001 |
| canopy square | 90-90-22 | 005-231171 |
| canopy round | ø90-22 | 005-260073 |
| internal power feeder (incl. cable 2000mm) | | 030-2525038 |
| internal power feeder (incl. cable 5000mm) | | 030-2525138 |
| pass through connector electrical (pair) | | 030-2171138 |
| 3-in-1 mounting tool* | | 030-2611000 |

*guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector
more electrical and mechanical connectors see page 21

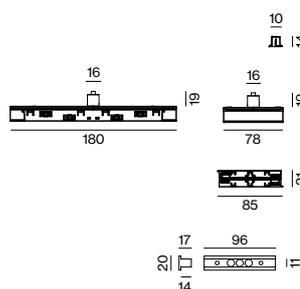



MOVE IT 10 system

direct suspended


EN Thin extruded aluminium profile with 24 mm height and 10 mm width groove; for suspended mounting (cable suspension, height adjustment without tools, incl. black feed); designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profil extrudé en aluminium plat avec 24 mm de hauteur et 10 mm de largeur de joint ; pour montage suspendu (suspension par câble, réglage en hauteur sans outil, câble d'alimentation noir inclus) ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; avec profil de rail intégré pour fixation d'alimentation électrique et signal DALI-2 ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90
 L90 @ 50 000h
 DALI-2


Type



Configurations

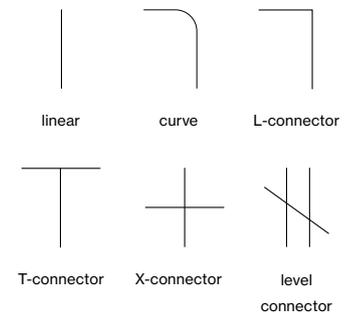

Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white 9016 / jet black 9005 P
- jet black RAL 9005

MATERIAL COLOUR ACCESSORIES


- traffic white* RAL 9016
- jet black RAL 9005

*mechanical connectors are traffic white / jet black

MATERIAL COLOUR CABLE SUSPENSION


- chrome
- jet black RAL 9005
- traffic white 9016 / chrome

MOVE IT 10 square direct suspended



INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|------------|---------------|------------|
| 1100 | channel | 030-151303 |
| 2100 | channel | 030-151503 |
| 3100 | channel | 030-151703 |
| custom cut | channel | E83650 |
| R 300 | curve channel | 030-153103 |
| R 500 | curve channel | 030-153203 |



Accessories

END CAPS / CONNECTORS

| TYPE | ORDER CODE |
|-----------------------------|-------------|
| end caps (pair) | 030-132001 |
| linear connector electrical | 030-2101138 |
| L connector electrical | 030-2111138 |
| T connector electrical | 030-2121138 |
| X connector electrical | 030-2131138 |
| linear connector mechanical | 030-2300018 |
| L connector mechanical | 030-133501 |
| T connector mechanical | 030-133601 |
| X connector mechanical | 030-133701 |

more electrical and mechanical connectors see page 21



BLIND COVER

| L (mm) | | ORDER CODE |
|------------|-------------|------------|
| 1100 | blind cover | 030-100301 |
| 2100 | blind cover | 030-100501 |
| 3100 | blind cover | 030-100701 |
| custom cut | blind cover | E83600 |

CABLE SUSPENSION / CANOPY / ELECTRICAL ACCESSORIES

| TYPE | L (mm) | ORDER CODE |
|--|----------|-------------|
| cable suspension | 1500 | 030-223001 |
| cable susp. linear connector | 1500 | 030-221001 |
| cable susp. linear conn. electrical | 1500 | 030-222001 |
| canopy square | 90-90-22 | 005-231171 |
| canopy round | ø90-22 | 005-260073 |
| internal power feeder (incl. cable 2000mm) | | 030-2525038 |
| internal power feeder (incl. cable 5000mm) | | 030-2525138 |
| pass through connector electrical (pair) | | 030-2171138 |
| 3-in-1 mounting tool* | | 030-2611000 |

*guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector
more electrical and mechanical connectors see page 21

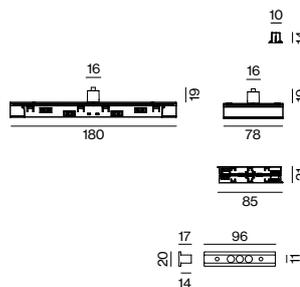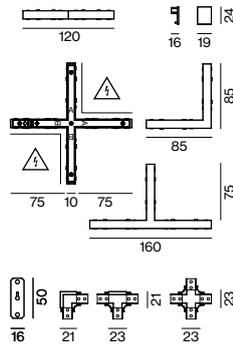



MOVE IT 10 system

pole


EN Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for vertical and horizontal mounting; easy installation of the mounting set, incl. feed; with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profilé bas extrudé en aluminium avec largeur de joint de 10 mm ; forme angulaire (24 mm de haut) ou tubulaire (26 mm de haut) au choix ; pour montage vertical et horizontal ; simplicité d'installation du kit de montage, alimentation comprise ; avec profilé de rail d'alimentation intégré des deux côtés pour la tension d'alimentation et le signal DALI-2 ; alimentation et signal DALI-2 pour les deux rails avec arrivée unique grâce à des connecteurs de type PASS THROUGH ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Types



Mounting types

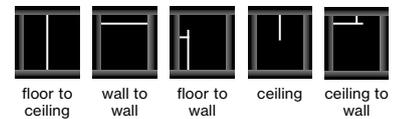

Colours



custom cut on building site

Order options

| COLOUR TEMPERATURE | |
|--------------------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 3500 K | 7 |
| 4000 K | 6 |

CONTROL

DALI-2

MATERIAL COLOUR


- traffic white 9016 / jet black 9005 P
- jet black RAL 9005

MATERIAL COLOUR ACCESSORIES

- traffic white* RAL 9016
- jet black RAL 9005

*mechanical connectors are traffic white/jet black

MOVE IT 10 square pole



INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|------------|---------|------------|
| 1100 | channel | 030-131303 |
| 2100 | channel | 030-131503 |
| 3100 | channel | 030-131703 |
| custom cut | channel | E83630 |

INSTALLATION TRACK DIRECT




| L (mm) | | ORDER CODE |
|------------|---------|------------|
| 1100 | channel | 030-151303 |
| 2100 | channel | 030-151503 |
| 3100 | channel | 030-151703 |
| custom cut | channel | E83650 |

MOUNTING SET



| TYPE | ORDER CODE |
|---|------------|
| floor to ceiling set (pair) | 030-134101 |
| wall to wall set (pair) | 030-134101 |
| floor to wall set (wall bracket 400 mm incl. end cap) | 030-134201 |
| ceiling set (incl. end cap) | 030-134301 |

MOVE IT 10 round pole



INSTALLATION TRACK

| L (mm) | | ORDER CODE |
|------------|---------|------------|
| 1100 | channel | 030-141303 |
| 2100 | channel | 030-141503 |
| 3100 | channel | 030-141703 |
| custom cut | channel | E83640 |

MOUNTING SET




| TYPE | ORDER CODE |
|---|------------|
| floor to ceiling set (pair) | 030-144101 |
| wall to wall set (pair) | 030-144101 |
| floor to wall set (wall bracket 400 mm incl. end cap) | 030-144201 |
| ceiling set (incl. end cap) | 030-144301 |

Accessories

BLIND COVER


| L (mm) | | ORDER CODE |
|------------|-------------|------------|
| 1100 | blind cover | 030-100301 |
| 2100 | blind cover | 030-100501 |
| 3100 | blind cover | 030-100701 |
| custom cut | blind cover | E83600 |

ELECTRICAL ACCESSORIES



| TYPE | ORDER CODE |
|---|-------------|
| internal power feeder (incl. cable 2000 mm) | 030-2525038 |
| internal power feeder (incl. cable 5000 mm) | 030-2525138 |
| pass through connector electrical (pair) | 030-2171138 |

MOUNTING ACCESSORY



| TYPE | ORDER CODE |
|--|-------------|
| 3-in-1 mounting tool | 030-2611000 |
| guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector | |


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black



Types

- 1 Linear Connector
- 2 L-Connector
- 3 T-Connector
- 4 X-Connector
- 5 Flex Connector
- 6 Ceiling to Wall Connector
- 7 Level Connector
- 8 Pass Through Connector

Configurations

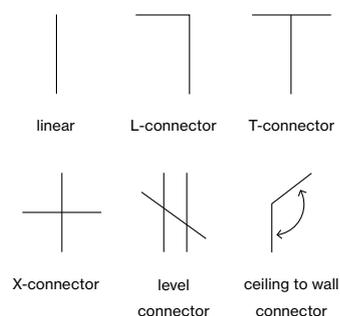

Colours



ELECTRICAL accessories

MOVE IT 10 system

EN Mechanical and electrical connectors to MOVE IT 10 system; in L-, T- or X-shape; or FLEX, CEILING TO WALL or LEVEL connectors, as well as PASS THROUGH connectors; for flexible system design; different converters for the entire MOVE IT system

FR Connecteurs mécaniques et électriques pour système MOVE IT 10 ; en L, T ou X ; ou connecteurs FLEX, CEILING TO WALL ou LEVEL, ainsi que connecteurs PASS THROUGH ; pour structure de système flexible ; différents convertisseurs pour le système MOVE IT complet

Order options

| CONNECTOR MECHANICAL | T |
|----------------------|---|
| recessed* | 1 |
| surface | 2 |
| suspended square | 3 |
| suspended round | 4 |

*T- and X-connector on request

CONTROL

DALI-2

MATERIAL COLOUR ACCESSORIES

| | |
|---------------------------|---|
| ○ traffic white* RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

*mechanical connectors are always traffic white/jet black accept mechanical recessed trimless


Options on request

CONNECTOR

T connector mechanical

X connector mechanical


only for recessed trimless



Electrical accessories


LINEAR CONNECTOR

| TYPE | ORDER CODE |
|--|--------------|
| linear connector electrical | 030-2101138 |
| linear connector mechanical/electrical | 030-2301038 |
| linear connector mechanical recessed | 030-113401 ■ |
| linear connector mechanical suspended | 030-2300018 |




L CONNECTOR

| TYPE | ORDER CODE |
|------------------------|--------------|
| L connector electrical | 030-2111138 |
| L connector mechanical | 030-1T3501 ■ |




T CONNECTOR

| TYPE | ORDER CODE |
|------------------------|--------------|
| T connector electrical | 030-2121138 |
| T connector mechanical | 030-1T3601 ■ |



X CONNECTOR

| TYPE | ORDER CODE |
|------------------------|--------------|
| X connector electrical | 030-2131138 |
| X connector mechanical | 030-1T3701 ■ |



FLEX/CEILING TO WALL/ LEVEL


| TYPE | ORDER CODE |
|--------------------------------------|-------------|
| flex connector electrical | 030-2141138 |
| ceiling to wall connector electrical | 030-2161138 |
| level connector electrical | 030-2151138 |
| level connector mechanical | 030-2351118 |



PASS THROUGH CONNECTOR

| TYPE | ORDER CODE |
|--|-------------|
| pass through connector electrical (pair) | 030-2171138 |


electrical connection from direct to indirect and vice versa



MOUNTING ACCESSORY

| TYPE | ORDER CODE |
|----------------------|-------------|
| 3-in-1 mounting tool | 030-2611000 |

guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector



POWER FEEDER

| TYPE | ORDER CODE |
|---|-------------|
| power feeder (only for surface) | 030-2523038 |
| internal power feeder (incl. cable 2000 mm) | 030-2525038 |
| internal power feeder (incl. cable 5000 mm) | 030-2525138 |

Order options


CONTROL

DALI-2

MATERIAL COLOUR

jet black RAL 9005

WIRELESS TO DALI-2 control device



POWER SUPPLY EXTERNAL supply 220-240V AC, 48V, 50-60Hz


| TYPE | EFFICIENCY | MOUNTING | L-W-H (mm) | ORDER CODE |
|--|------------|----------|------------|------------|
| 100W <input type="checkbox"/> PC II η 92% | | external | 350-30-18 | 002-62134 |
| 150W <input type="checkbox"/> PC II η 92% | | external | 350-30-18 | 002-62135 |
| 250W <input type="checkbox"/> PC II η 93% | | external | 400-40-22 | 002-62139 |

ENEC approved

POWER SUPPLY BASIC 48V

220-240V | 50-60Hz | PC II | Lifetime @ 120W, 45° ambient temp. cascadable max. 3 devices


| TYPE | EFFICIENCY/LIFETIME | W-H-D (mm) | ORDER CODE |
|--------------------------------|---------------------|------------|-------------|
| 160W η 94.5% / > 100.000h | | 72-90-63 | 005-6520210 |



DIN RAIL POWER SUPPLY PRO 48V

220-240V | 50-60Hz | PC I | MTBF @ 55° ambient temperature cascadable max. 5 devices (240W) or 3 devices (480W)

| TYPE | EFFICIENCY/MTBF | W-H-D (mm) | ORDER CODE |
|------------------------------|-----------------|-------------|-------------|
| 240W η 92% / > 400.000h | | 60-125-100 | 005-6220110 |
| 480W η 93% / > 350.000h | | 120-125-100 | 005-6220210 |



DALI-2 SELV DEVICE

| TYPE | L-W-H (mm) | ORDER CODE |
|--------------|------------|-------------|
| control unit | 212-37-26 | 050-2061130 |


necessary to create DALI-2 SELV signal; DALI power supply integrated




WIRELESS TO DALI-2 CONTROL DEVICE

| TYPE | L-W-H (mm) | ORDER CODE |
|---------|------------|-------------|
| Casambi | 150-11-23 | 030-2531030 |

DALI-2 SELV device required



Private Residence
Visualisation

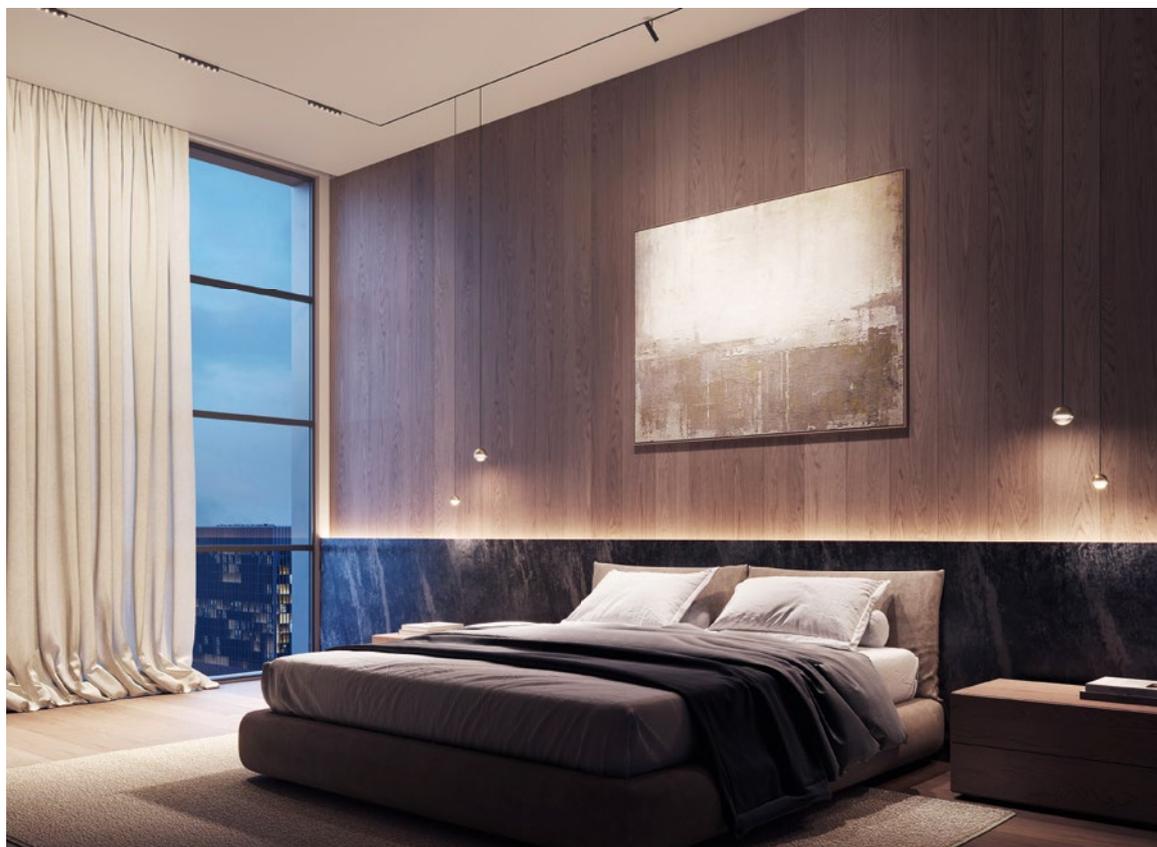




Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 3 SDCM
 up to 2390lm | 91lm/W
 DALI-2

Types


opal




reflectorline



darklight



indirect



Colour



Light distributions



**REFLECTORLINE / OPAL /
 DARKLIGHT / INDIRECT**

linear inset 10



flush
 mounted



flex inset for
 reflectoreline

Order options


| COLOUR TEMPERATURE | |
|--------------------|---|
| 2700K | 4 |
| 3000K | 5 |
| 3500K | 7 |
| 4000K | 6 |

CONTROL
DALI-2

MATERIAL COLOUR
● jet black RAL 9005


LIGHT OPTIC
opal high performance
reflectorline
darklight
indirect

LIGHT INSET 10



OPAL HIGH PERFORMANCE

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|---------------|
| 5.9 W | 2700K | 389lm | 500 | 030-6120::38H |
| | 3000K | 421lm | | |
| | 4000K | 421lm | | |




REFLECTORLINE

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|---------------|
| 6.6 W | 2700K | 575lm | 300 | 030-6110::38M |
| | 3000K | 601lm | | |
| | 4000K | 601lm | | |


REFLECTORLINE FLEX

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|---------------|
| 6.6 W | 2700K | 575lm | 300 | 030-7110::38M |
| | 3000K | 601lm | | |
| | 4000K | 601lm | | |



DARKLIGHT

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|---------------|
| 5.7 W | 2700K | 441lm | 300 | 030-6210::38M |
| | 3000K | 465lm | | |
| | 4000K | 514lm | | |




INDIRECT incl. feeder

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|---------------|
| 15.8 W | 2700K | 1080lm | 1000 | 030-6330::38M |
| | 3000K | 1140lm | | |
| | 4000K | 1190lm | | |
| 32 W | 2700K | 2170lm | 2000 | 030-6370::38M |
| | 3000K | 2280lm | | |
| | 4000K | 2390lm | | |

MOUNTING ACCESSORY

| TYPE | ORDER CODE |
|----------------------|-------------|
| 3-in-1 mounting tool | 030-2611000 |

for custom cut tracks, Indirect light inset and Pass Through connector



INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour black




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 3 SDCM
 up to 2140 lm/m | 130 lm/W
 DALI-2

Type

spotline



Colours



Light distribution



suitable for Interalu
 smart ceilings & Hunter
 Douglas Architectural



DIN EN 12464-1
 UGR ≤ 19



high efficiency
 up to 130 lm/W

SPOTLINE

linear inset 10

Order options

COLOUR TEMPERATURE

| | |
|--------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 3500 K | 7 |
| 4000 K | 6 |

CONTROL

DALI-2


MATERIAL COLOUR

| | |
|---|---|
| <input type="radio"/> traffic white RAL 9016 | 7 |
| <input checked="" type="radio"/> jet black RAL 9005 | 8 |

LIGHT OPTIC

spotline


LIGHT INSET 10



SPOTLINE

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|--|
| 16.0 W | 2700 K | 1980 lm | 1000 | 0 3 0 - 5 1 3 0 :: 3 <input checked="" type="checkbox"/> W |
| | 3000 K | 2140 lm | | |
| | 3500 K | 2140 lm | | |
| | 4000 K | 2140 lm | | |

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

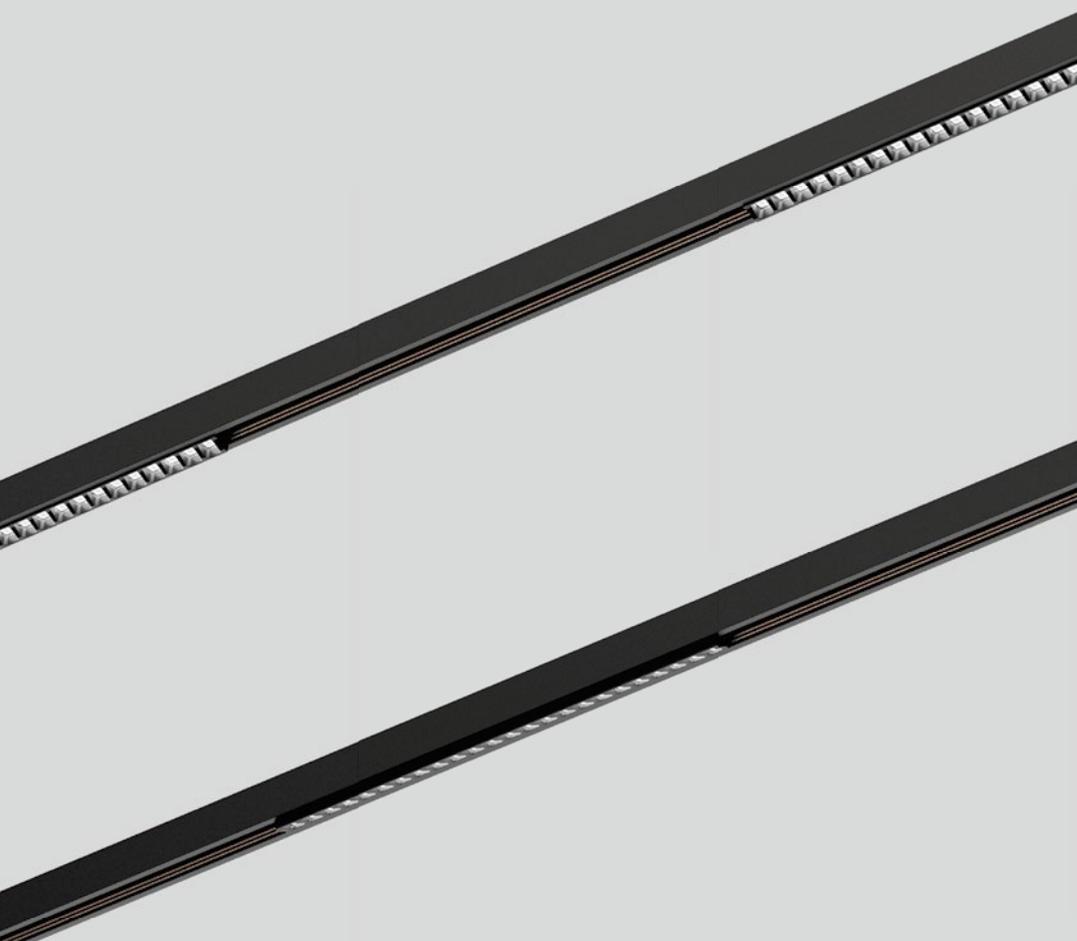


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI \geq 90, 3 SDCM
up to 1334 lm/m | 115 lm/W
DALI-2

Types

wallwasher



Colours



Light distribution



wall

WALLWASHER

linear inset 10



high efficiency
lens optic

Order options

| COLOUR TEMPERATURE | |
|--------------------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 3500 K | 7 |
| 4000 K | 6 |

CONTROL

DALI-2

MATERIAL COLOUR

- traffic white RAL 9016 7
 jet black RAL 9005 8

LIGHT OPTIC

wallwasher


LIGHT INSET 10



WALLWASHER

| INS. POWER | COLOUR TEMP. | LUM. FLUX | L (mm) | ORDER CODE |
|------------|--------------|-----------|--------|--------------|
| 9.3 W | 2700 K | 1185 lm | 300 | 030-5010-3 A |
| | 3000 K | 1242 lm | | |
| | 3500 K | 1334 lm | | |
| | 4000 K | 1334 lm | | |

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

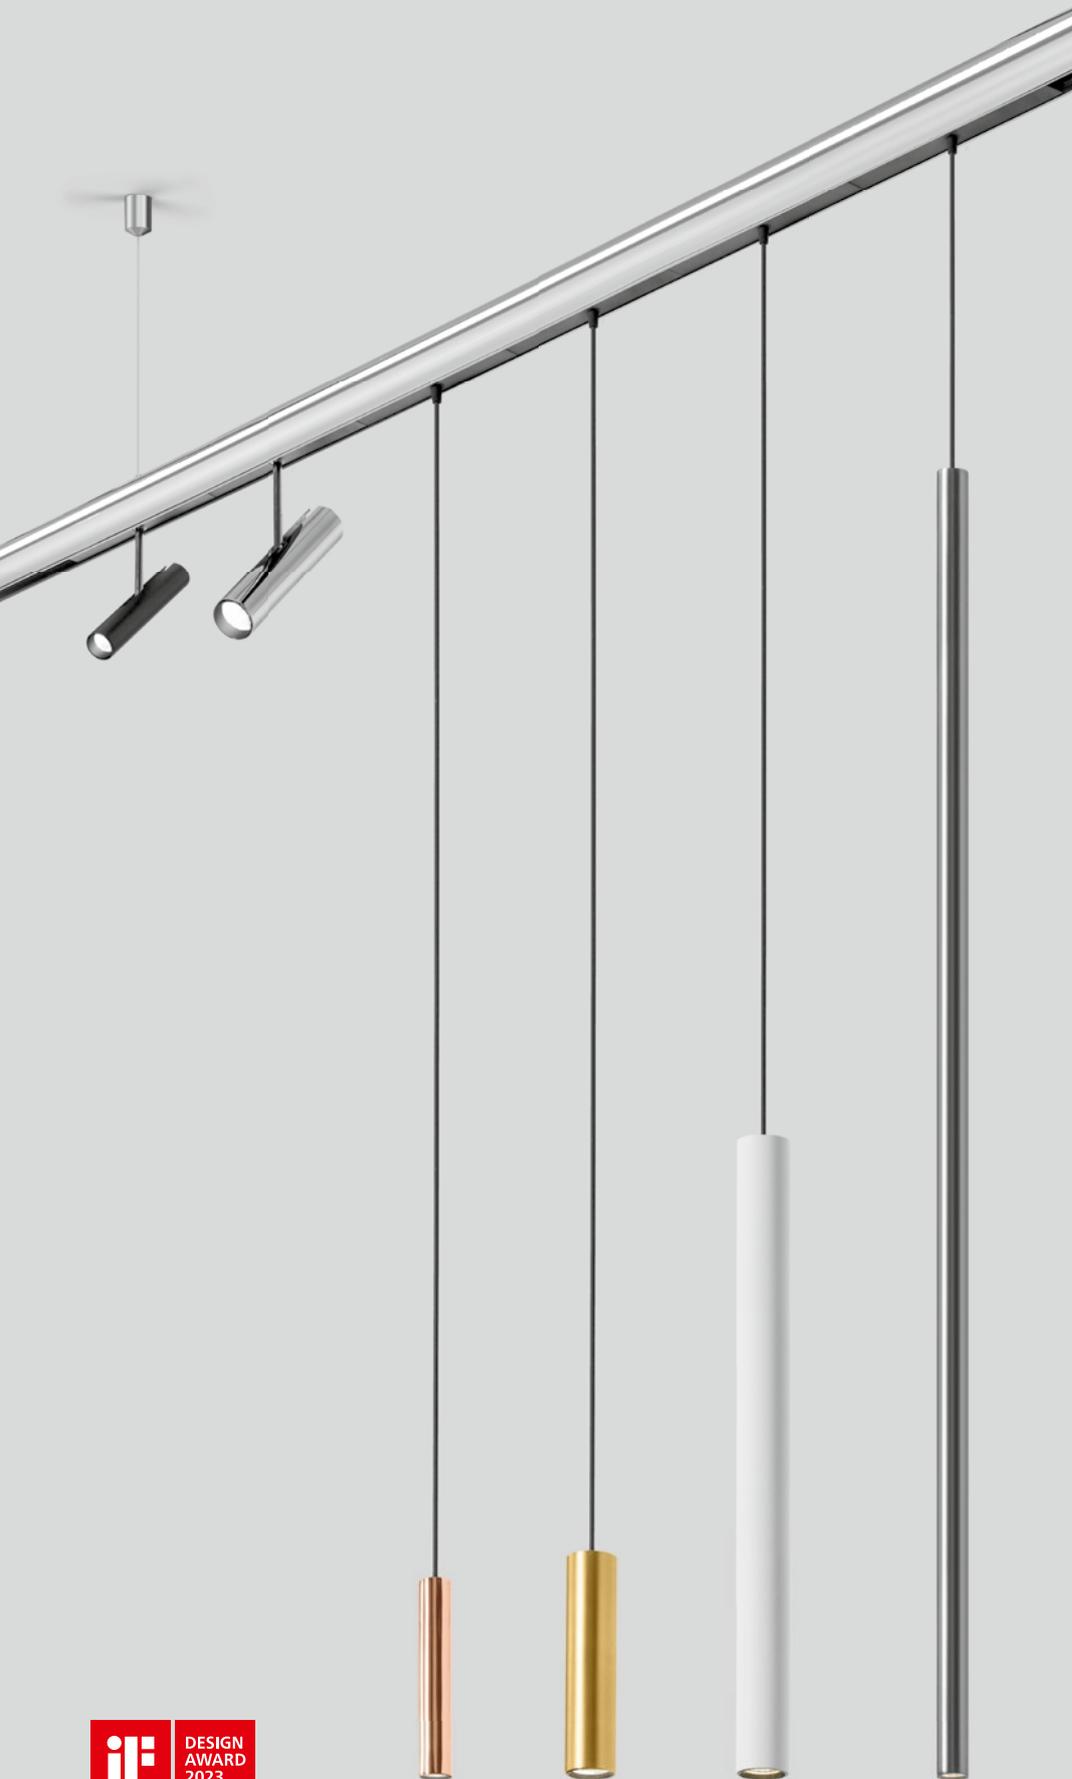


Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90
 up to 91lm/W
 DALI-2

Types

adjustable rod

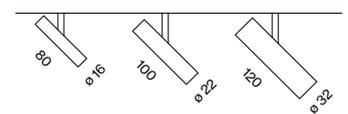

suspended

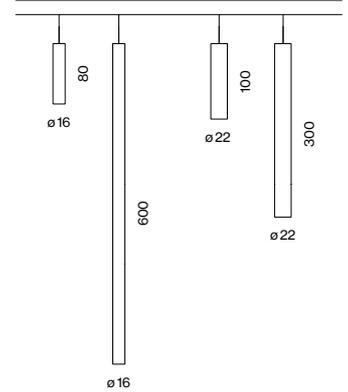

Colours



Light distributions

TILA 16




TILA 22/32




flex inset for curve elements



glare control via honeycomb louver



365° rotatable 135° tilttable



free positioning by cable and hook



flush adapter mounting



TILA
 decorative inset 10

Order options

| HOUSING HEIGHT TILA 16 | L |
|------------------------|---|
| 80 mm | 0 |
| 600 mm | 1 |

| HOUSING HEIGHT TILA 22 | L |
|------------------------|---|
| 100 mm | 3 |
| 300 mm | 4 |

| COLOUR TEMPERATURE | •• |
|--------------------|----|
| 2700 K | 4 |
| 3000 K | 5 |
| 3500 K | 7 |
| 4000 K | 6 |





| CONTROL | |
|---------|--|
| DALI-2 | |

| MATERIAL COLOUR | ☑ |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |
| ● brushed aluminium | 6 |
| ● chrome | 4 |
| ● gun metal | 5 |
| ● brushed brass | 3 |
| ● rose gold | 9 |

| MATERIAL COLOUR ACCESSORIES | ■ |
|-----------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

| BEAM ANGLE TILA 16 | ▲ |
|--------------------|---|
| medium 23° | M |
| flood 31° | F |

| BEAM ANGLE TILA 22/32 | ▲ |
|-----------------------|---|
| spot 15/18° | S |
| medium 26/24° | M |
| flood 43/34° | F |

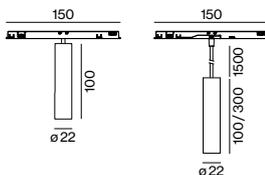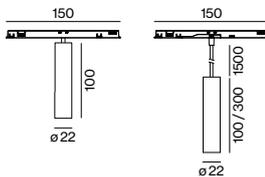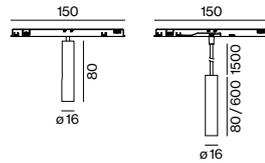

TILA 16



ADJUSTABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|--------------|
| 3.3 W | 2700 K | 205 lm | 030-6500::3▲ |
| | 3000 K | 220 lm | |
| | 4000 K | 220 lm | |

SUSPENDED

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 3.3 W | 2700 K | 205 lm | 030-66 L0::3▲ |
| | 3000 K | 220 lm | |
| | 4000 K | 220 lm | |

ADJUSTABLE FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|--------------|
| 3.3 W | 2700 K | 198 lm | 030-7500::3▲ |
| | 3000 K | 213 lm | |
| | 4000 K | 220 lm | |

SUSPENDED FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 3.3 W | 2700 K | 198 lm | 030-76 L0::3▲ |
| | 3000 K | 213 lm | |
| | 4000 K | 220 lm | |

TILA 22



ADJUSTABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|--------------|
| 5.7 W | 2700 K | 347 lm | 030-6530::3▲ |
| | 3000 K | 354 lm | |
| | 4000 K | 385 lm | |

SUSPENDED

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 5.7 W | 2700 K | 347 lm | 030-66 L0::3▲ |
| | 3000 K | 354 lm | |
| | 4000 K | 385 lm | |

ADJUSTABLE FLEX


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|--------------|
| 5.7 W | 2700 K | 344 lm | 030-7530::3▲ |
| | 3000 K | 351 lm | |
| | 4000 K | 385 lm | |

SUSPENDED FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 5.7 W | 2700 K | 344 lm | 030-76 L0::3▲ |
| | 3000 K | 351 lm | |
| | 4000 K | 385 lm | |


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white, medium

TILA 32



ADJUSTABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 9.7 W | 2700 K | 824lm | 030-6560::3▲▲ |
| | 3000 K | 855lm | |
| | 4000 K | 892lm | |



ADJUSTABLE FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 9.7 W | 2700 K | 824lm | 030-7560::3▲▲ |
| | 3000 K | 855lm | |
| | 4000 K | 892lm | |

Mounting accessories



HOOK ceiling mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|------|----------|-------------|
| hook | 16-30 | 030-100001■ |

Optical accessories

HONEYCOMB LOUVER

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TILA 22 | 20-3 | 007-1965118 |
| TILA 32 | 30-3 | 007-1965168 |

OVAL LENS

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TILA 32 | 30-3 | 007-1965860 |

SOFT LENS

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TILA 32 | 30-3 | 007-1965960 |

WALLWASHER LENS

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TILA 32 | 30-3 | 007-1965760 |

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white, medium




Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 up to 1140 lm | 105 lm/W
 DALI-2

Types

square track



round track



Colours



Light distributions

TARO 32



TARO 45



TARO
 decorative inset 10



wallwasher floor
 360° rotatable



wallwasher
 floor

Order options

COLOUR TEMPERATURE

| | |
|--------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 3500 K | 7 |
| 4000 K | 6 |

CONTROL

DALI-2

MATERIAL COLOUR

| | |
|------------------------|---|
| traffic white RAL 9016 | 7 |
| jet black RAL 9005 | 8 |
| brushed aluminium | 6 |
| chrome | 4 |
| gun metal | 5 |
| brushed brass | 3 |
| rose gold | 9 |


BEAM ANGLE TARO 32

| | |
|------------|---|
| spot 18° | S |
| medium 24° | M |
| flood 34° | F |

BEAM ANGLE TARO 45


| | |
|------------|---|
| medium 24° | M |
| flood 36° | F |

TARO 32



DOWNLIGHT SQUARE TRACK


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 9.6 W | 2700 K | 796lm | 030-6700::3 |
| | 3000 K | 826lm | |
| | 4000 K | 862lm | |



DOWNLIGHT ROUND TRACK


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 9.6 W | 2700 K | 796lm | 030-6740::3 |
| | 3000 K | 826lm | |
| | 4000 K | 862lm | |

TARO 45



DOWNLIGHT SQUARE TRACK


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 10.9 W | 2700 K | 1050lm | 030-6710::3 |
| | 3000 K | 1090lm | |
| | 4000 K | 1140lm | |



DOWNLIGHT ROUND TRACK


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 10.9 W | 2700 K | 1050lm | 030-6750::3 |
| | 3000 K | 1090lm | |
| | 4000 K | 1140lm | |

TARO 45 wallwasher floor



WALLWASHER FLOOR SQUARE TRACK

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 9.3 W | 2700 K | 840lm | 030-6780::3 |
| | 3000 K | 790lm | |
| | 4000 K | 790lm | |



WALLWASHER FLOOR ROUND TRACK

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 9.3 W | 2700 K | 840lm | 030-6790::3 |
| | 3000 K | 790lm | |
| | 4000 K | 790lm | |

Optical accessories

HONEYCOMB LOUVER

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TARO 32 | 30·4 | 007-1965168 |
| TARO 45 | 42·3 | 007-1965188 |

OVAL LENS

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TARO 32 | 30·3 | 007-1965860 |
| TARO 45 | 42·3 | 007-1965880 |


SOFT LENS

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TARO 32 | 30·3 | 007-1965960 |
| TARO 45 | 42·3 | 007-1965980 |

WALLWASHER LENS

| TYPE | Ø-H (mm) | ORDER CODE |
|---------|----------|-------------|
| TARO 32 | 30·3 | 007-1965760 |
| TARO 45 | 42·3 | 007-1965780 |


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI_{≥90}, colour white, medium

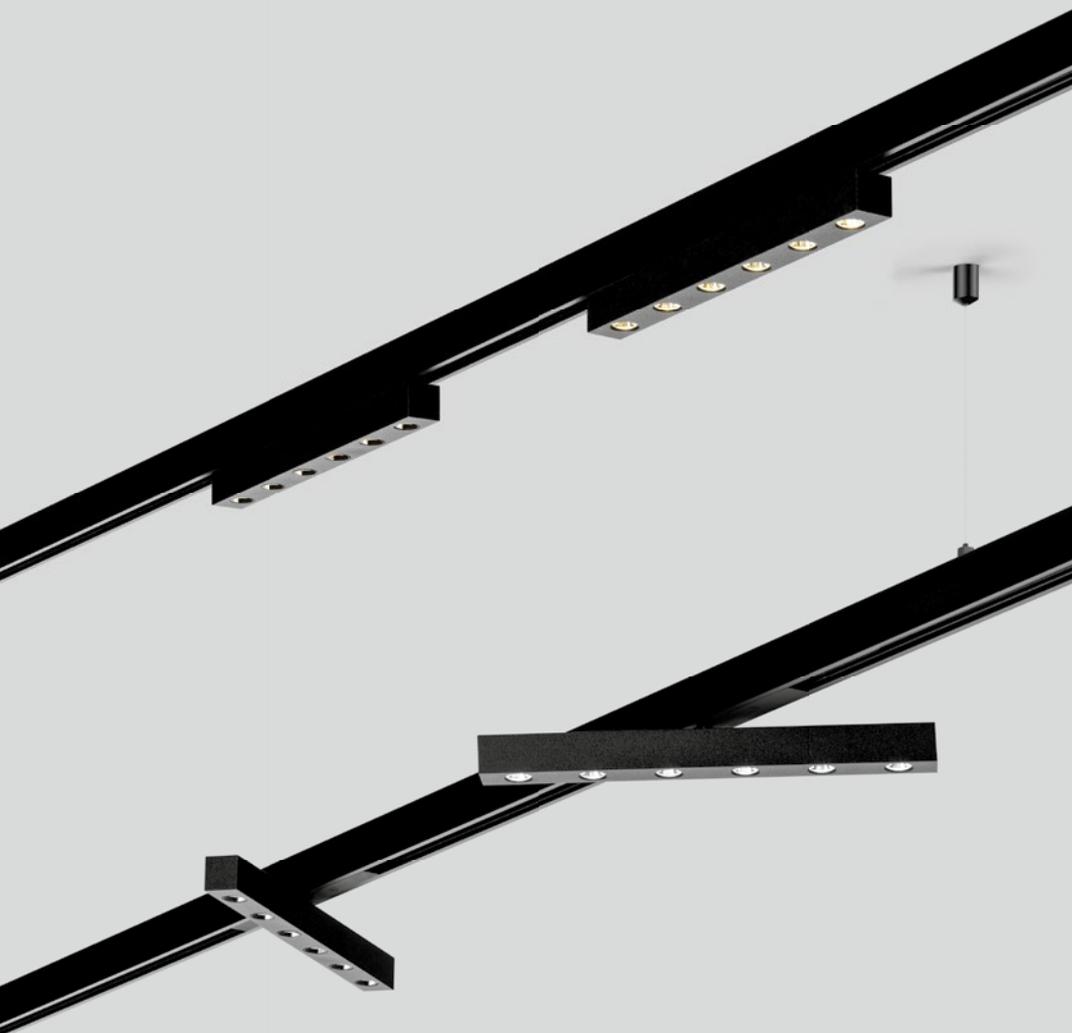

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI \geq 90, 2 SDCM
 up to 1480 lm | 80 lm/W
 DALI-2

Type

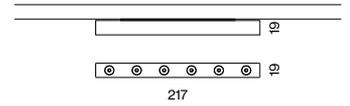

Colours



Light distributions



med. flood wall
 floor



DESIGN
 AWARD
 2023

GIRA

decorative inset 10



360°
 rotatable



wallwasher
 floor

Order options

COLOUR TEMPERATURE

| | |
|--------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 3500 K | 7 |
| 4000 K | 6 |

CONTROL

DALI-2


MATERIAL COLOUR

| | |
|---|---|
| <input type="radio"/> traffic white RAL 9016 | 7 |
| <input checked="" type="radio"/> jet black RAL 9005 | 8 |

BEAM ANGLE

| | |
|------------|---|
| medium 23° | M |
| flood 34° | F |


GIRA



DOWNLIGHT ROTATABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|--|
| 18.2 W | 2700 K | 1290 lm | 0 3 0 - 6 4 1 0 :: 3    |
| | 3000 K | 1450 lm | |
| | 4000 K | 1450 lm | |

GIRA wallwasher floor



WALLWASHER FLOOR ROTATABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|--|
| 18.8 W | 2700 K | 1370 lm | 0 3 0 - 6 4 3 0 :: 3    W |
| | 3000 K | 1480 lm | |
| | 4000 K | 1480 lm | |


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, medium



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 up to 1050 lm | 130 lm/W
 DALI-2

Types

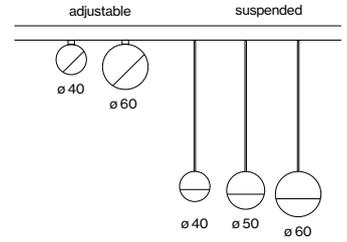

Colours



Light distribution




NOBA
 decorative inset 10



365° rotatable
 90° tiltable



flex inset for
 curve elements



free positioning by
 cable and hook



high quality
 glass lens

Order options

COLOUR TEMPERATURE

| | |
|--------|---|
| 2700 K | 4 |
| 3000 K | 5 |
| 3500 K | 7 |
| 4000 K | 6 |

CONTROL

DALI-2

MATERIAL COLOUR

| | |
|---|---|
| <input type="radio"/> traffic white RAL 9016 | 7 |
| <input checked="" type="radio"/> jet black RAL 9005 | 8 |
| <input type="radio"/> brushed aluminium | 6 |
| <input type="radio"/> chrome | 4 |
| <input type="radio"/> gun metal | 5 |
| <input type="radio"/> brushed brass | 3 |
| <input type="radio"/> rose gold | 9 |

MATERIAL COLOUR


ACCESSORIES

| | |
|---|---|
| <input type="radio"/> traffic white RAL 9016 | 7 |
| <input checked="" type="radio"/> jet black RAL 9005 | 8 |

BEAM ANGLE


wide flood 67°

NOBA 40




SPOTLIGHT ADJUSTABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 3.5 W | 2700 K | 405lm | 0 30-6 800 :: 3 |
| | 3000 K | 421lm | |
| | 4000 K | 441lm | |




DOWNLIGHT SUSPENDED

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 3.5 W | 2700 K | 405lm | 0 30-6 900 :: 3 |
| | 3000 K | 421lm | |
| | 4000 K | 441lm | |



SPOTLIGHT ADJUSTABLE FLEX


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 3.5 W | 2700 K | 405lm | 0 30-7 800 :: 3 |
| | 3000 K | 421lm | |
| | 4000 K | 441lm | |



DOWNLIGHT SUSPENDED FLEX


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 3.5 W | 2700 K | 405lm | 0 30-7 900 :: 3 |
| | 3000 K | 421lm | |
| | 4000 K | 441lm | |

NOBA 50



DOWNLIGHT SUSPENDED


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 7.1 W | 2700 K | 819lm | 0 30-6 910 :: 3 |
| | 3000 K | 851lm | |
| | 4000 K | 891lm | |



DOWNLIGHT SUSPENDED FLEX


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 7.1 W | 2700 K | 819lm | 0 30-6 910 :: 3 |
| | 3000 K | 851lm | |
| | 4000 K | 891lm | |

NOBA 60



SPOTLIGHT ADJUSTABLE


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 8.1 W | 2700 K | 961lm | 0 30-6 820 :: 3 |
| | 3000 K | 999lm | |
| | 4000 K | 1050lm | |



DOWNLIGHT SUSPENDED


| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-----------------|
| 8.1 W | 2700 K | 961lm | 0 30-6 920 :: 3 |
| | 3000 K | 999lm | |
| | 4000 K | 1050lm | |

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white



SPOTLIGHT ADJUSTABLE FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 8.1W | 2700K | 961lm | 030-7820::3 |
| | 3000K | 999lm | |
| | 4000K | 1050lm | |



DOWNLIGHT SUSPENDED FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|-------------|
| 8.1W | 2700K | 961lm | 030-7920::3 |
| | 3000K | 999lm | |
| | 4000K | 1050lm | |

Mounting accessories



HOOK ceiling mounted

| TYPE | Ø-H (mm) | ORDER CODE |
|------|----------|------------|
| hook | 16-30 | 030-100001 |

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥90, colour white




Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 up to 2200 lm | 131lm/W
 DALI-2

Types

BO PRO 35 BO PRO 45 BO PRO 55



Colours



Light distributions



changeable optic and accessories



flush adapter mounting



flex inset for curve elements



oval lens for oval light illumination



365° rotatable 135° tiltable

BO PRO

spotlight inset 10

Order options

| COLOUR TEMPERATURE | |
|--------------------|---|
| 2700K | 4 |
| 3000K | 5 |
| 3500K | 7 |
| 4000K | 6 |




| CONTROL | |
|---------|--|
| DALI-2 | |

| MATERIAL COLOUR | |
|--------------------------|---|
| ○ traffic white RAL 9016 | 7 |
| ● jet black RAL 9005 | 8 |

| BEAM ANGLE | |
|------------------|---|
| BO PRO 35 | ▲ |
| spot 20° | S |
| medium 30° | M |
| flood 38° | F |
| wide flood 50° | W |

| BO PRO 45 | ▲ |
|------------------|---|
| spot 20° | S |
| medium 31° | M |
| flood 39° | F |
| wide flood 50° | W |

| BO PRO 55 | ▲ |
|------------------|---|
| spot 20° | S |
| medium 24° | M |
| flood 37° | F |
| wide flood 46° | W |



BO PRO 35



ADJUSTABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 6.7 W | 4000 K | 836 lm | 030-5500::3▲▲ |

ADJUSTABLE FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 6.7 W | 4000 K | 836 lm | 030-8500::3▲▲ |

BO PRO 45



ADJUSTABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 10.0 W | 4000 K | 1425 lm | 030-5510::3▲▲ |

ADJUSTABLE FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 10.0 W | 4000 K | 1425 lm | 030-8510::3▲▲ |

BO PRO 55



ADJUSTABLE

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 14.4 W | 4000 K | 2200 lm | 030-5520::3▲▲ |

ADJUSTABLE FLEX

| INSET POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|-------------|--------------|---------------|---------------|
| 14.4 W | 4000 K | 2200 lm | 030-8520::3▲▲ |

Accessories

HONEYCOMB LOUVER black

| TYPE | ORDER CODE |
|-----------|-------------|
| BO PRO 35 | 007-1975168 |
| BO PRO 45 | 007-1975188 |
| BO PRO 55 | 007-1975198 |

OVAL LENS

| TYPE | ORDER CODE |
|-----------|-------------|
| BO PRO 35 | 007-1975860 |
| BO PRO 45 | 007-1975880 |
| BO PRO 55 | 007-1975890 |

SOFT LENS

| TYPE | ORDER CODE |
|-----------|-------------|
| BO PRO 35 | 007-1975960 |
| BO PRO 45 | 007-1975980 |
| BO PRO 55 | 007-1975990 |

SOFT LENS

| TYPE | ORDER CODE |
|-----------|-------------|
| BO PRO 35 | 007-1975760 |
| BO PRO 45 | 007-1975780 |
| BO PRO 55 | 007-1975790 |

EXCHANGEABLE LENS

| TYPE | ORDER CODE |
|-----------|-------------|
| BO PRO 35 | 005-541221▲ |
| BO PRO 45 | 005-541231▲ |
| BO PRO 55 | 005-541241▲ |


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for 4000K, CRI ≥ 90, colour white, medium 2700K -5%, 3000K -2%, 3500K -1%



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 3 SDCM
 up to 3250 lm | 153 lm/W
 UGR ≤ 19 / 65° ≤ 1500 cd/m²
 L90 @ 50 000 h
 DALI-2
 louver, spotline


Types

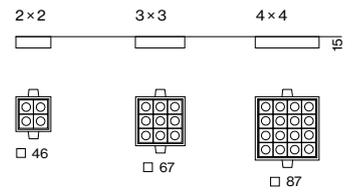

Colours



Light distribution



CUBIS

inset



single luminaire available



high efficiency up to 153lm/W

Order options

COLOUR TEMPERATURE

| | |
|-------|---|
| 2700K | 9 |
| 3000K | 0 |
| 3500K | 2 |
| 4000K | 1 |

CONTROL

DALI-2

HOUSING COLOUR

| | |
|---|---|
| <input type="radio"/> traffic white RAL 9016 | 7 |
| <input checked="" type="radio"/> jet black RAL 9005 | 8 |


LOUVER COLOUR

| | |
|------------------|---|
| chrome reflector | 4 |
| black reflector | 8 |

SPOTLINE COLOUR

| | |
|------------------------|---|
| traffic white RAL 9016 | 7 |
| jet black RAL 9005 | 8 |


CUBIS 2x2



LOUVER | SUPER WIDE FLOOD

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 2.3W, 200mA | 3000K | 335lm | 030-5600  |


SPOTLINE | MEDIUM

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 2.3W, 200mA | 3000K | 325lm | 030-5700  |


SPOTLINE | WIDE FLOOD

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 2.3W, 200mA | 3000K | 325lm | 030-5700  |


CUBIS 3x3




LOUVER | SUPER WIDE FLOOD

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 5.1W, 200mA | 3000K | 750lm | 030-5610  |


SPOTLINE | MEDIUM

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 5.1W, 200mA | 3000K | 730lm | 030-5710  |


SPOTLINE | WIDE FLOOD

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 5.1W, 200mA | 3000K | 730lm | 030-5710  |

CUBIS 4x4



LOUVER | SUPER WIDE FLOOD

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 9.0W, 400mA | 3000K | 1340lm | 030-5620  |

SPOTLINE | MEDIUM

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 9.0W, 400mA | 3000K | 1300lm | 030-5720  |

SPOTLINE | WIDE FLOOD

| SYSTEM POWER | COLOUR TEMP. | LUM. FLUX | ORDER CODE |
|--------------|--------------|-----------|--|
| 9.0W, 400mA | 3000K | 1300lm | 030-5720  |

LUMINOUS FLUX value calculated for
3000K, CRI ≥ 90, louver chrome or spotline white
2700K -4%, 3500K +6%, 4000K +6%