


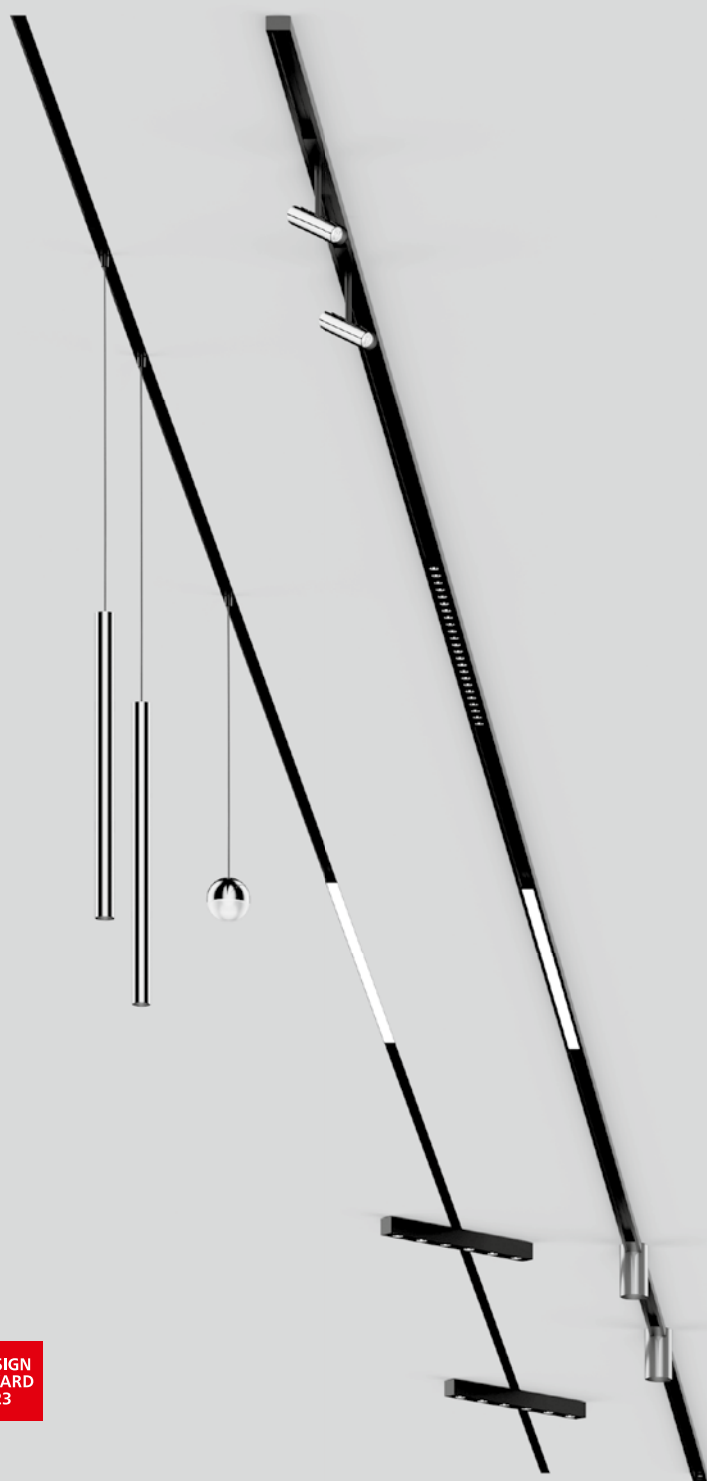

MOVE IT 10 system

recessed trimless/surface


EN Thin extruded aluminium profile with 16 mm (trimless) or 11 mm (surface) height and 10 mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ceiling surface mounting; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of FLEX or LEVEL connectors; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profilé bas extrudé en aluminium de 16 mm (trimless) ou 11 mm (surface) de haut et largeur de joint de 10 mm ; au choix pour un encastrément sans bord dans des plafonds en placo-plâtre (montage mural ou au plafond) d'une épaisseur de 12,5 mm ; ou pour un montage en surface au mur ou au plafond ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs FLEX ou LEVEL ; avec profil de rail intégré pour fixation d'alimentation électrique et signal DALI-2 ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Types



Configurations



Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- ☒ traffic white 9016 / jet black 9005 P
☒ jet black RAL 9005

MATERIAL COLOUR

ACCESSORIES

- ☐ traffic white* RAL 9016
☒ jet black RAL 9005

*mechanical connectors are always traffic white / jet black accept mechanical recessed trimless

Options on request


CONNECTOR

T connector mechanical

X connector mechanical

only for recessed trimless

MOVE IT 10 trimless



INSTALLATION TRACK

L (mm)


L (mm)		ORDER CODE
1100	channel	030-1113038
2100	channel	030-1115038
3100	channel	030-1117038
custom cut	channel	E83610 8

END CAPS / CONNECTORS


TYPE

TYPE	ORDER CODE
end caps (pair)	030-1120018
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical*	030-2121138
X connector electrical*	030-2131138
linear connector mechanical	030-1134018
L connector mechanical	030-1135018

*when using T and X connector mechanical
more electrical and mechanical connectors see p. 21



MOVE IT 10 surface



INSTALLATION TRACK

L (mm)


L (mm)		ORDER CODE
1100	channel	030-1213038
2100	channel	030-1215038
3100	channel	030-1217038
custom cut	channel	E83620 8
R 300	curve channel	030-1231038
R 500	curve channel	030-1232038

END CAPS / CONNECTORS

TYPE

TYPE	ORDER CODE
end caps (pair)	030-1220018
linear connector electrical	030-2101138
L connector electrical	030-2111138
T connector electrical	030-2121138
X connector electrical	030-2131138
L connector mechanical	030-1235018
T connector mechanical	030-1236018
X connector mechanical	030-1237018

more electrical and mechanical connectors see p. 21



Accessories

BLIND COVER

L (mm)

L (mm)		ORDER CODE
1100	blind cover	030-1003018
2100	blind cover	030-1005018
3100	blind cover	030-1007018
custom cut	blind cover	E83600 8

ELECTRICAL ACCESSORIES

TYPE



TYPE	ORDER CODE
power feeder (only for surface)	030-2523038
internal power feeder (incl. cable 2000 mm)	030-2525038
internal power feeder (incl. cable 5000 mm)	030-2525138

MOUNTING ACCESSORY

TYPE

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000

guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector





MOVE IT 10 system

suspended


EN Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for suspended mounting (cable suspension, height adjustment without tools, incl. black feed); with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profilé bas extrudé en aluminium avec largeur de joint de 10 mm ; forme angulaire (24 mm de haut) ou tubulaire (26 mm de haut) au choix ; pour montage suspendu (suspension par câble, réglage en hauteur sans outil, câble d'alimentation noir inclus) ; avec profilé de rail d'alimentation intégré des deux côtés pour la tension d'alimentation et le signal DALI-2 ; alimentation et signal DALI-2 pour les deux rails avec arrivée unique grâce à des connecteurs de type PASS THROUGH ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Types



Configurations



Colours



custom cut on building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- ☒ traffic white 9016 / jet black 9005 P
☒ jet black RAL 9005

MATERIAL COLOUR

ACCESSORIES

- ☐ traffic white* RAL 9016
☒ jet black RAL 9005

*mechanical connectors are traffic white / jet black

MATERIAL COLOUR

CABLE SUSPENSION

- ☒ chrome
☒ jet black RAL 9005
☒ traffic white 9016 / chrome

MOVE IT 10 square suspended



INSTALLATION TRACK

L (mm)

1100	channel
2100	channel
3100	channel
custom cut	channel
R 300	curve channel
R 500	curve channel

ORDER CODE

030-131303
030-131503
030-131703
E83630
030-133103
030-133203

END CAPS / CONNECTORS


TYPE

end caps (pair)
linear connector electrical
L connector electrical
T connector electrical
X connector electrical
linear connector mechanical
L connector mechanical
T connector mechanical
X connector mechanical

ORDER CODE

030-132001
030-2101138
030-2111138
030-2121138
030-2131138
030-2300018
030-133501
030-133601
030-133701

more electrical and mechanical connectors see page 21

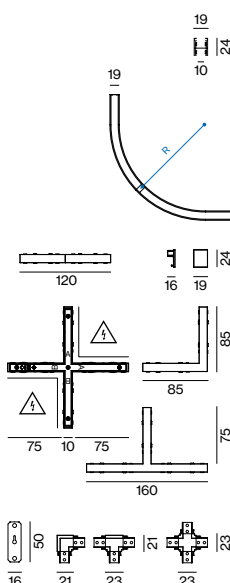

MOVE IT 10 round suspended



INSTALLATION TRACK

L (mm)

1100	channel
2100	channel
3100	channel
custom cut	channel
R 300	curve channel
R 500	curve channel

ORDER CODE

030-141303
030-141503
030-141703
E83640
030-143103
030-143203

END CAPS / CONNECTORS


TYPE

end caps (pair)
linear connector electrical
L connector electrical
T connector electrical
X connector electrical
linear connector mechanical
L connector mechanical
T connector mechanical
X connector mechanical

ORDER CODE

030-142001
030-2101138
030-2111138
030-2121138
030-2131138
030-2300018
030-143501
030-143601
030-143701

more electrical and mechanical connectors see page 21

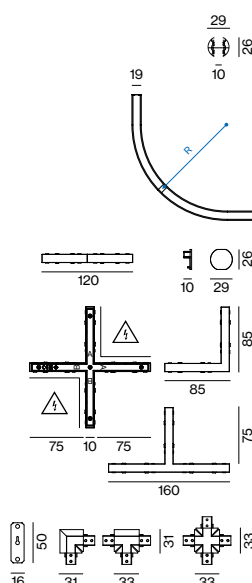

Accessories

BLIND COVER see page 19


INDIRECT LIGHT INSET see page 19

CABLE SUSPENSION / CANOPY / ELECTRICAL ACCESSORIES

TYPE

TYPE	L (mm)	ORDER CODE
cable suspension	1500	030-223001
cable susp. linear connector	1500	030-221001
cable susp. linear conn. electrical	1500	030-222001
canopy square	90-90-22	005-231171
canopy round	ø90-22	005-260073
internal power feeder (incl. cable 2000mm)		030-2525038
internal power feeder (incl. cable 5000mm)		030-2525138
pass through connector electrical (pair)		030-2171138
3-in-1 mounting tool*		030-2611000

*guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector
more electrical and mechanical connectors see page 21





MOVE IT 10 system

direct suspended


EN Thin extruded aluminium profile with 24 mm height and 10 mm width groove; for suspended mounting (cable suspension, height adjustment without tools, incl. black feed); designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; with integrated power track profile for take off of supply voltage and DALI-2 signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profil extrudé en aluminium plat avec 24 mm de hauteur et 10 mm de largeur de joint ; pour montage suspendu (suspension par câble, réglage en hauteur sans outil, câble d'alimentation noir inclus) ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; avec profil de rail intégré pour fixation d'alimentation électrique et signal DALI-2 ; surface anodisée ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Type



Configurations



Colours



custom cut on
building site

Order options

CONTROL

DALI-2

MATERIAL COLOUR

- ☒ traffic white 9016 / jet black 9005 P
☒ jet black RAL 9005

MATERIAL COLOUR

ACCESSORIES

- ☐ traffic white* RAL 9016
☒ jet black RAL 9005


*mechanical connectors are traffic white / jet black

MATERIAL COLOUR

CABLE SUSPENSION

- ☒ chrome
☒ jet black RAL 9005
☒ traffic white 9016 / chrome

MOVE IT 10 square direct suspended



INSTALLATION TRACK

L (mm)

1100	channel
2100	channel
3100	channel
custom cut	channel
R 300	curve channel
R 500	curve channel

ORDER CODE

030-151303	☒
030-151503	☒
030-151703	☒
E83650	☒
030-153103	☒
030-153203	☒

Accessories

END CAPS / CONNECTORS

TYPE

end caps (pair)
linear connector electrical
L connector electrical
T connector electrical
X connector electrical
linear connector mechanical
L connector mechanical
T connector mechanical
X connector mechanical

ORDER CODE

030-132001	☒
030-2101138	☒
030-2111138	☒
030-2121138	☒
030-2131138	☒
030-2300018	☒
030-133501	☒
030-133601	☒
030-133701	☒

more electrical and mechanical connectors see page 21

BLIND COVER

L (mm)

1100	blind cover
2100	blind cover
3100	blind cover
custom cut	blind cover

ORDER CODE

030-100301	☒
030-100501	☒
030-100701	☒
E83600	☒

CABLE SUSPENSION / CANOPY / ELECTRICAL ACCESSORIES

TYPE

cable suspension	1500
cable susp. linear connector	1500
cable susp. linear conn. electrical	1500
canopy square	90-90-22
canopy round	ø90-22
internal power feeder (incl. cable 2000mm)	
internal power feeder (incl. cable 5000mm)	
pass through connector electrical (pair)	
3-in-1 mounting tool*	


L (mm)

ORDER CODE

030-223001	☐
030-221001	☐
030-222001	☐
005-231171	☒
005-260073	☒
030-2525038	☒
030-2525138	☒
030-2171138	☒
030-2611000	☒

*guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector

more electrical and mechanical connectors see page 21





MOVE IT 10 system

pole


EN Thin extruded aluminium profile with 10 mm width groove; choice of angular (24 mm height) or tubular (26 mm height) design; for vertical and horizontal mounting; easy installation of the mounting set, incl. feed; with integrated power track profile on both sides for take off of supply voltage and DALI-2 signal; power supply and DALI-2 signal for both power tracks with only one feed by means of PASS THROUGH connector; designed for continuous lighting systems; flexible system design through L, T or X connectors or by means of LEVEL connectors; surface anodised or powder coated; insets can be installed flexibly and without tools by means of clip mount

FR Profilé bas extrudé en aluminium avec largeur de joint de 10 mm ; forme angulaire (24 mm de haut) ou tubulaire (26 mm de haut) au choix ; pour montage vertical et horizontal ; simplicité d'installation du kit de montage, alimentation comprise ; avec profilé de rail d'alimentation intégré des deux côtés pour la tension d'alimentation et le signal DALI-2 ; alimentation et signal DALI-2 pour les deux rails avec arrivée unique grâce à des connecteurs de type PASS THROUGH ; conçu pour système d'éclairage continu ; configuration de système flexible grâce à des connecteurs en L, T ou X ou au moyen de connecteurs LEVEL ; surface anodisé ou thermolaquée ; montage flexible et sans outil des inserts grâce à la fixation par clip


Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
L90 @ 50 000 h
DALI-2


Types



Mounting types



Colours



custom cut on
building site

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL


DALI-2

MATERIAL COLOUR	
● traffic white 9016 / jet black 9005 P	
● jet black RAL 9005	8

MATERIAL COLOUR ACCESSORIES	
○ traffic white* RAL 9016	7
● jet black RAL 9005	8

*mechanical connectors are traffic white/jet black

MOVE IT 10 square pole



19
H
10

INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-131303
2100	channel	030-131503
3100	channel	030-131703
custom cut	channel	E83630

19
H
10

INSTALLATION TRACK DIRECT


L (mm)		ORDER CODE
1100	channel	030-151303
2100	channel	030-151503
3100	channel	030-151703
custom cut	channel	E83650

19
H
10

MOUNTING SET

TYPE	ORDER CODE
floor to ceiling set (pair)	030-134101
wall to wall set (pair)	030-134101
floor to wall set (wall bracket 400 mm incl. end cap)	030-134201
ceiling set (incl. end cap)	030-134301

MOVE IT 10 round pole



29
H
10

INSTALLATION TRACK

L (mm)		ORDER CODE
1100	channel	030-141303
2100	channel	030-141503
3100	channel	030-141703
custom cut	channel	E83640

29
H
10

MOUNTING SET

TYPE	ORDER CODE
floor to ceiling set (pair)	030-144101
wall to wall set (pair)	030-144101
floor to wall set (wall bracket 400 mm incl. end cap)	030-144201
ceiling set (incl. end cap)	030-144301

Accessories

BLIND COVER

L (mm)		ORDER CODE
1100	blind cover	030-100301
2100	blind cover	030-100501
3100	blind cover	030-100701
custom cut	blind cover	E83600

ELECTRICAL ACCESSORIES

TYPE	ORDER CODE
internal power feeder (incl. cable 2000 mm)	030-2525038
internal power feeder (incl. cable 5000 mm)	030-2525138
pass through connector electrical (pair)	030-2171138

MOUNTING ACCESSORY

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000
guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector	




INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black



Types

- 1 Linear Connector
- 2 L-Connector
- 3 T-Connector
- 4 X-Connector
- 5 Flex Connector
- 6 Ceiling to Wall Connector
- 7 Level Connector
- 8 Pass Through Connector

Configurations

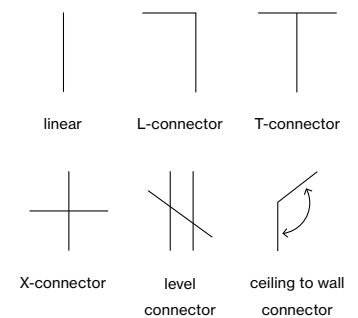

Colours



ELECTRICAL accessories

MOVE IT 10 system

EN Mechanical and electrical connectors to MOVE IT 10 system; in L-, T- or X-shape; or FLEX, CEILING TO WALL or LEVEL connectors; as well as PASS THROUGH connectors; for flexible system design; different converters for the entire MOVE IT system

FR Connecteurs mécaniques et électriques pour système MOVE IT 10 ; en L, T ou X ; ou connecteurs FLEX, CEILING TO WALL ou LEVEL, ainsi que connecteurs PASS THROUGH ; pour structure de système flexible ; différents convertisseurs pour le système MOVE IT complet

Order options

CONNECTOR MECHANICAL	T
recessed*	1
surface	2
suspended square	3
suspended round	4

*T- and X-connector on request

CONTROL

DALI-2

MATERIAL COLOUR ACCESSORIES








○ traffic white* RAL 9016	7
● jet black RAL 9005	8

*mechanical connectors are always traffic white/jet black accept mechanical recessed trimless

Options on request

CONNECTOR

T connector mechanical	
X connector mechanical	
only for recessed trimless	



Electrical accessories

LINEAR CONNECTOR

TYPE	ORDER CODE
linear connector electrical	030-2101138
linear connector mechanical/electrical	030-2301038
linear connector mechanical recessed	030-113401 ■
linear connector mechanical suspended	030-2300018

L CONNECTOR

TYPE	ORDER CODE
L connector electrical	030-2111138
L connector mechanical	030-1 T 3501 ■

T CONNECTOR

TYPE	ORDER CODE
T connector electrical	030-2121138
T connector mechanical	030-1 T 3601 ■

X CONNECTOR

TYPE	ORDER CODE
X connector electrical	030-2131138
X connector mechanical	030-1 T 3701 ■

FLEX/CEILING TO WALL/ LEVEL

TYPE	ORDER CODE
flex connector electrical	030-2141138
ceiling to wall connector electrical	030-2161138
level connector electrical	030-2151138
level connector mechanical	030-2351118

PASS THROUGH CONNECTOR

TYPE	ORDER CODE
pass through connector electrical (pair)	030-2171138
electrical connection from direct to indirect and vice versa	

MOUNTING ACCESSORY

TYPE	ORDER CODE
3-in-1 mounting tool	030-2611000
guiding device for custom cut on building site (2 pcs required); drilling template for Indirect Light Inset and Pass Through Connector	

POWER FEEDER

TYPE	ORDER CODE
power feeder (only for surface)	030-2523038
internal power feeder (incl. cable 2000 mm)	030-2525038
internal power feeder (incl. cable 5000 mm)	030-2525138

Order options

CONTROL



DALI-2



MATERIAL COLOUR

● jet black RAL 9005

WIRELESS TO DALI-2 control device



POWER SUPPLY EXTERNAL supply 220-240V AC, 48V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
100 W	□ PC II η 92 %	external	350-30-18	002-62134
150 W	□ PC II η 92 %	external	350-30-18	002-62135
250 W	□ PC II η 93 %	external	400-40-22	002-62139

ENEC approved

POWER SUPPLY BASIC 48 V

220–240 V | 50–60 Hz |  PC II | Lifetime @ 120 W, 45° ambient temp.
cascadable max. 3 devices

TYPE	EFFICIENCY/LIFETIME	W-H-D (mm)	ORDER CODE
160W	η 94.5% / > 100.000h	72:90:63	005-6520210

DIN RAIL POWER SUPPLY PRO 48V

220-240 V | 50-60 Hz |  PC I | MTBF @ 55° ambient temperature
cascadable max. 5 devices (240 W) or 3 devices (480 W)

TYPE	EFFICIENCY/MTBF	W-H-D (mm)	ORDER CODE
240W	η 92 % / > 400.000h	60-125-100	005-6220110
480W	η 93 % / > 350.000h	120-125-100	005-6220210

DALI-2 SELV DEVICE

TYPE	L·W·H (mm)	ORDER CODE
control unit	212·37·26	050-2061130


necessary to create DALI-2 SELV signal: DALI power supply integrated

WIRELESS TO DALI-2 CONTROL DEVICE

TYPE	L·W·H (mm)	ORDER CODE
Casambi	150·11·23	030-2531030

DALI-2 SELV device required

Private Residence
Visualisation

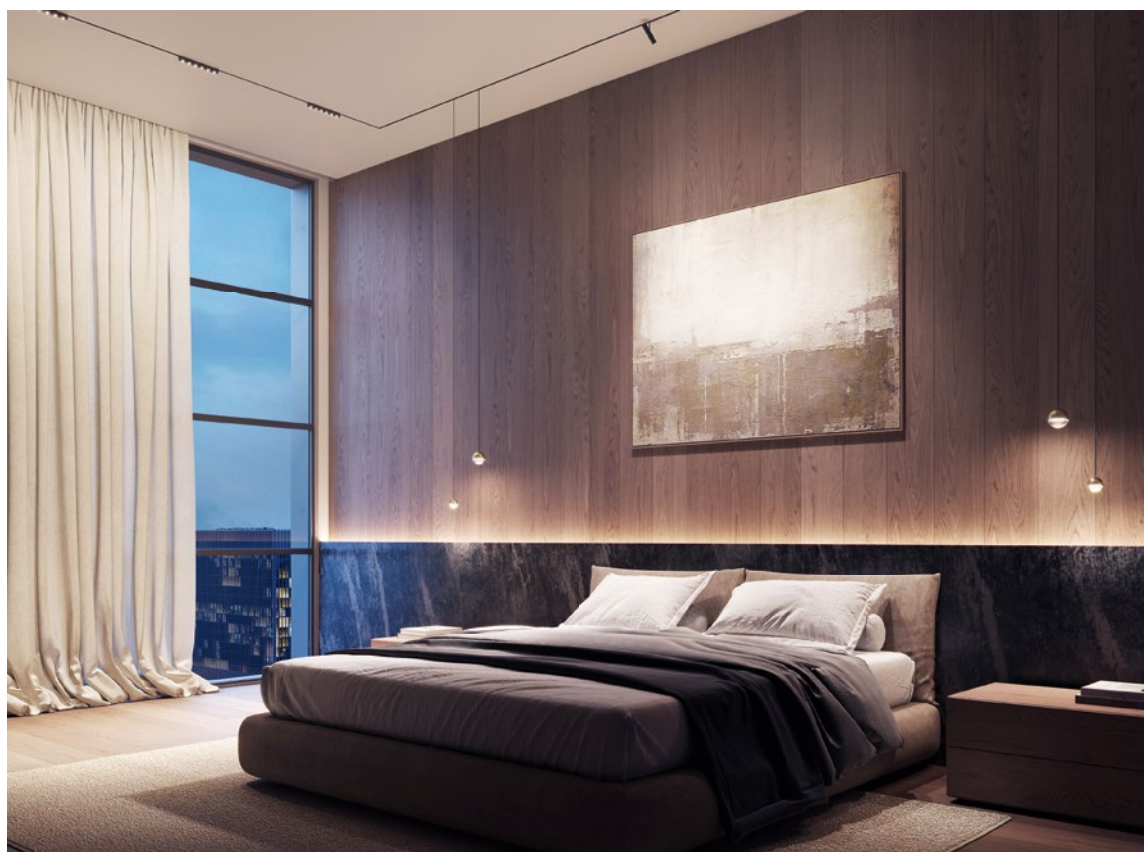




Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90, 3 SDCM
up to 2390 lm | 91 lm/W
DALI-2

Types


opal




reflectorline



darklight




indirect



Colour



Light distributions



flush
mounted



flex inset for
reflectorline



DESIGN
AWARD
2023

REFLECTORLINE / OPAL / DARKLIGHT / INDIRECT

linear inset 10

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2

MATERIAL COLOUR

● jet black RAL 9005

LIGHT OPTIC

opal high performance

reflectorline

darklight


indirect

LIGHT INSET 10



OPAL HIGH PERFORMANCE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.9 W	2700 K	389 lm	500	030-6120::38H
	3000 K	421 lm		
	4000 K	421 lm		




REFLECTORLINE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
6.6 W	2700 K	575 lm	300	030-6110::38M
	3000 K	601 lm		
	4000 K	601 lm		



REFLECTORLINE FLEX

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
6.6 W	2700 K	575 lm	300	030-7110::38M
	3000 K	601 lm		
	4000 K	601 lm		



DARKLIGHT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.7 W	2700 K	441 lm	300	030-6210::38M
	3000 K	465 lm		
	4000 K	514 lm		



INDIRECT incl. feeder

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
15.8 W	2700 K	1080 lm	1000	030-6330::38M
	3000 K	1140 lm		
	4000 K	1190 lm		
32 W	2700 K	2170 lm	2000	030-6370::38M
	3000 K	2280 lm		
	4000 K	2390 lm		

MOUNTING ACCESSORY


TYPE

3-in-1 mounting tool

ORDER CODE


030-2611000

for custom cut tracks, Indirect light inset and Pass Through connector



INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

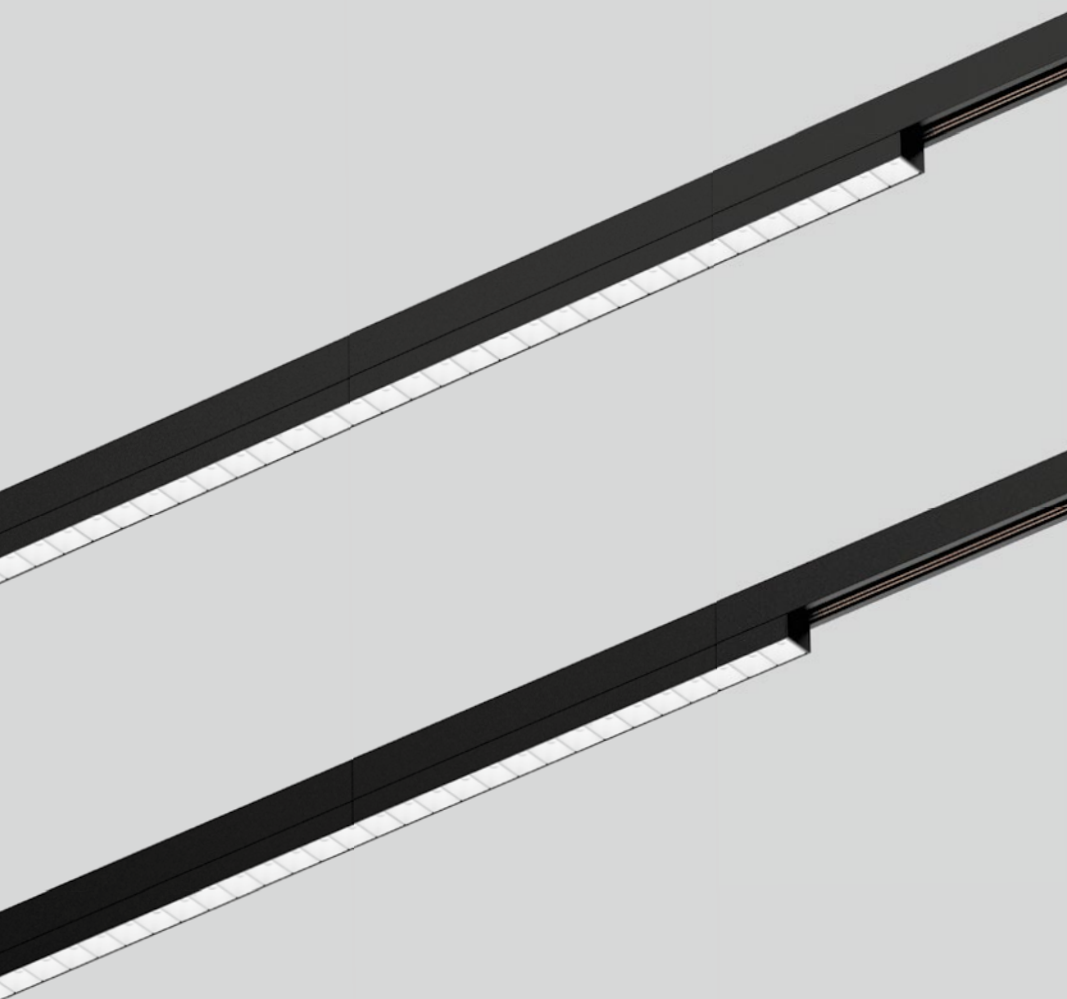

SPOTLINE


linear inset 10

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 , 3 SDCM
up to 2140 lm/m | 130 lm/W
DALI-2

Type

spotline



Colours



Light distribution



suitable for Interalu
smart ceilings & Hunter
Douglas Architectural



DIN EN 12464-1
UGR ≤ 19



high efficiency
up to 130 lm/W

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL


DALI-2

MATERIAL COLOUR	
○ traffic white RAL 9016	7
● jet black RAL 9005	8

LIGHT OPTIC

spotline

LIGHT INSET 10



19

1000

10



CRI
≥ 90


1ADDR


48V




SPOTLINE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
16.0 W	2700 K	1980lm	1000	0 3 0 - 5 1 3 0 :: 3 W
	3000 K	2140lm		
	3500 K	2140lm		
	4000 K	2140lm		

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI≥ 90, colour black

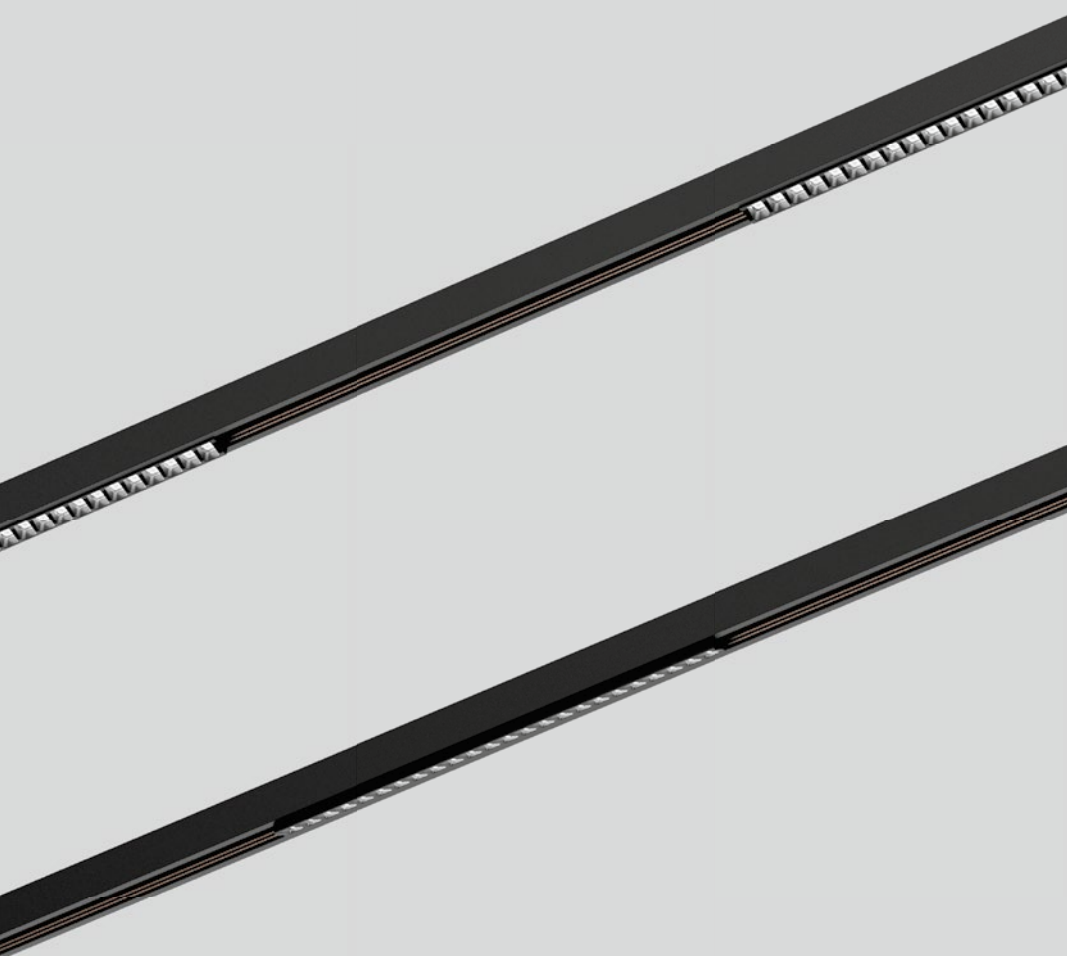

WALLWASHER


linear inset 10

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90, 3 SDCM
up to 1334 lm | 115 lm/W
DALI-2

Type

wallwasher



Colour



Light distribution



wall



high efficiency
lens optic

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2

MATERIAL COLOUR


● jet black RAL 9005

LIGHT OPTIC

wallwasher

LIGHT INSET 10






WALLWASHER

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.1W	2700 K	1185lm	300	0 3 0 - 5 0 1 0 : 3 8 A
	3000 K	1242lm		
	3500 K	1334lm		
	4000 K	1334lm		

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI≥ 90, colour black

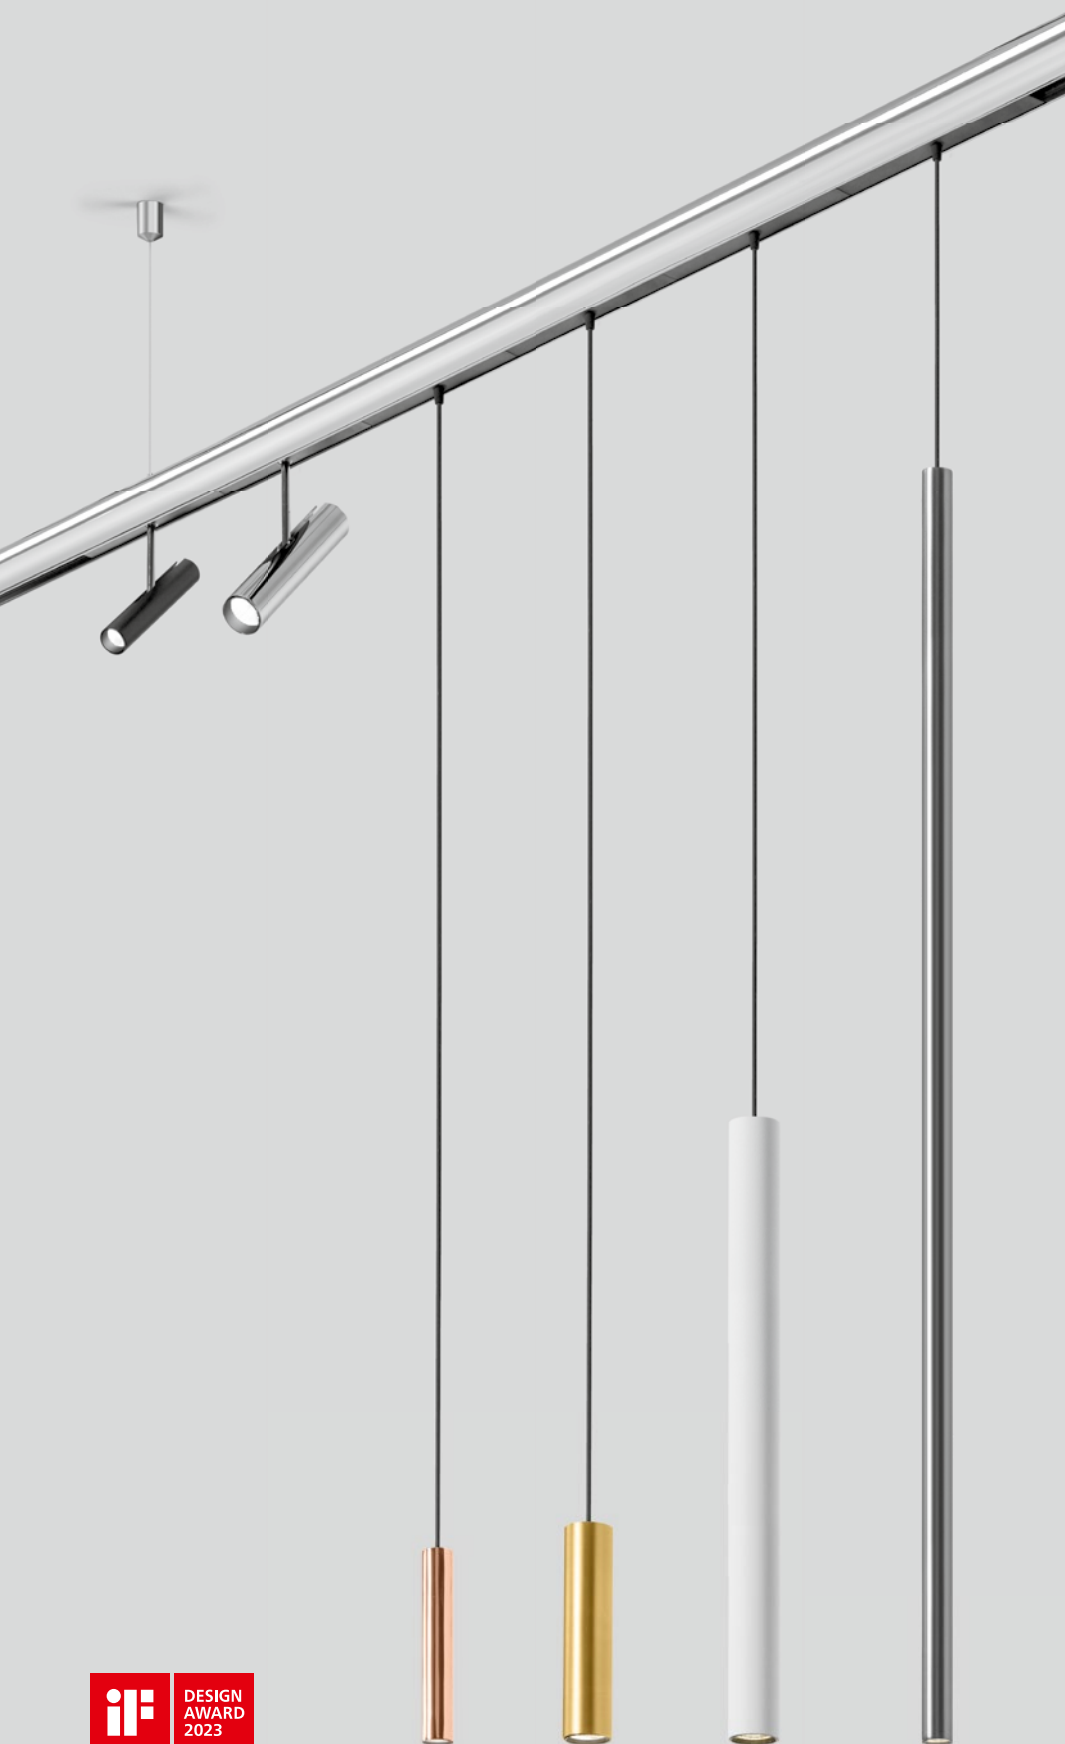


Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90
up to 91lm/W
DALI-2

Types

adjustable rod



suspended

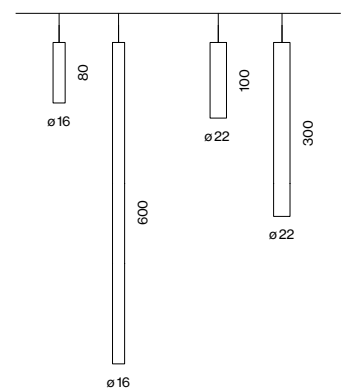

Colours



Light distributions

TILA 16




TILA 22/32




flex inset for
curve elements



glare control via
honeycomb louver



365° rotatable
135° tiltable



free positioning by
cable and hook



flush adapter
mounting



TILA

decorative inset 10

Order options

HOUSING HEIGHT TILA 16	
80 mm	0
600 mm	1

HOUSING HEIGHT TILA 22	
100 mm	3
300 mm	4

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6





CONTROL

DALI-2


MATERIAL COLOUR	
○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9

BEAM ANGLE TILA 16	
medium 23°	M
flood 31°	F

BEAM ANGLE TILA 22	
spot 15°	S
medium 26°	M
flood 43°	F



TILA 16



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	205 lm	030-6500 3 3 ▲
	3000 K	220 lm	
	4000 K	220 lm	

SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	205 lm	030-66 L 0 3 3 ▲
	3000 K	220 lm	
	4000 K	220 lm	


ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	198 lm	030-7500 3 3 ▲
	3000 K	213 lm	
	4000 K	220 lm	

SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.3 W	2700 K	198 lm	030-76 L 0 3 3 ▲
	3000 K	213 lm	
	4000 K	220 lm	

TILA 22



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	347 lm	030-6530 3 3 ▲
	3000 K	354 lm	
	4000 K	385 lm	

SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	347 lm	030-66 L 0 3 3 ▲
	3000 K	354 lm	
	4000 K	385 lm	

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	344 lm	030-7530 3 3 ▲
	3000 K	351 lm	
	4000 K	385 lm	

SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
5.7 W	2700 K	344 lm	030-76 L 0 3 3 ▲
	3000 K	351 lm	
	4000 K	385 lm	

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, medium

Order options

COLOUR TEMPERATURE

2700K	4
3000K	5
3500K	7
4000K	6

CONTROL

DALI-2	
--------	--

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9



MATERIAL COLOUR
ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE TILA 32

spot 18°	S
medium 24°	M
flood 34°	F

TILA 32



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.7 W	2700 K	824lm	030-656037▲
	3000 K	855lm	
	4000 K	892lm	

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.7 W	2700 K	824lm	030-756037▲
	3000 K	855lm	
	4000 K	892lm	

Mounting accessories

HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001■

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
TILA 32	30-3	007-1965168

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
TILA 32	30-3	007-1965860

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
TILA 32	30-3	007-1965960

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
TILA 32	30-3	007-1965760

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, medium






Quickinfo


2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90, 2 SDCM
up to 1140 lm | 105 lm/W
DALI-2

Types

square track



round track



Colours



Light distributions

TARO 32



TARO 45




TARO

decorative inset 10



wallwasher floor
360° rotatable



wallwasher
floor

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9


BEAM ANGLE TARO 32

spot 18°	S
medium 24°	M
flood 34°	F

BEAM ANGLE TARO 45

medium 24°	M
flood 36°	F

TARO 32




DOWNLIGHT SQUARE TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.6 W	2700 K	796 lm	030-670033▲▲
	3000 K	826 lm	
	4000 K	862 lm	

DOWNLIGHT ROUND TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.6 W	2700 K	796 lm	030-674033▲▲
	3000 K	826 lm	
	4000 K	862 lm	



TARO 45




DOWNLIGHT SQUARE TRACK


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.9 W	2700 K	1050 lm	030-671033▲▲
	3000 K	1090 lm	
	4000 K	1140 lm	

DOWNLIGHT ROUND TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.9 W	2700 K	1050 lm	030-675033▲▲
	3000 K	1090 lm	
	4000 K	1140 lm	



TARO 45 wallwasher floor




WALLWASHER FLOOR SQUARE TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.3 W	2700 K	840 lm	030-678033▲▲
	3000 K	790 lm	
	4000 K	790 lm	

WALLWASHER FLOOR ROUND TRACK

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
9.3 W	2700 K	840 lm	030-679033▲▲
	3000 K	790 lm	
	4000 K	790 lm	



Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·4	007-1965168
TARO 45	42·3	007-1965188

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·3	007-1965860
TARO 45	42·3	007-1965880

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·3	007-1965960
TARO 45	42·3	007-1965980

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
TARO 32	30·3	007-1965760
TARO 45	42·3	007-1965780


INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, medium



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90, 2 SDCM
up to 1480 lm | 80 lm/W
DALI-2

Type



Colours



Light distributions



GIRA

decorative inset 10



360°
rotatable



wallwasher
floor

Order options

COLOUR TEMPERATURE	
2700 K	4
3000 K	5
3500 K	7
4000 K	6



CONTROL

DALI-2

MATERIAL COLOUR	
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE	
medium 23°	M
flood 34°	F


GIRA



DOWNLIGHT ROTATABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
18.2 W	2700 K	1290 lm	0 3 0 - 6 4 1 0 :: 3 ▲
	3000 K	1450 lm	
	4000 K	1450 lm	

GIRA wallwasher floor



WALLWASHER FLOOR ROTATABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
18.8 W	2700 K	1370 lm	0 3 0 - 6 4 3 0 :: 3 ▲ W
	3000 K	1480 lm	
	4000 K	1480 lm	

INSET POWER is the current consumption excluding any ballast


LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, medium



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 up to 1050 lm | 130 lm/W
 DALI-2

Types



Colours



Light distribution



direct



NOBA


decorative inset 10



365° rotatable
90° tiltable



flex inset for
curve elements



free positioning by
cable and hook



high quality
glass lens

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2


MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9

BEAM ANGLE

wide flood 67°

NOBA 40



SPOTLIGHT ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405 lm	030-6800::3
	3000 K	421 lm	
	4000 K	441 lm	

DOWNLIGHT SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405 lm	030-6900::3
	3000 K	421 lm	
	4000 K	441 lm	

SPOTLIGHT ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405 lm	030-7800::3
	3000 K	421 lm	
	4000 K	441 lm	

DOWNLIGHT SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.5 W	2700 K	405 lm	030-7900::3
	3000 K	421 lm	
	4000 K	441 lm	

NOBA 50




DOWNLIGHT SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.1 W	2700 K	819 lm	030-6910::3
	3000 K	851 lm	
	4000 K	891 lm	

DOWNLIGHT SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.1 W	2700 K	819 lm	030-7910::3
	3000 K	851 lm	
	4000 K	891 lm	

NOBA 60



SPOTLIGHT ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1 W	2700 K	961 lm	030-6820::3
	3000 K	999 lm	
	4000 K	1050 lm	

DOWNLIGHT SUSPENDED

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1 W	2700 K	961 lm	030-6920::3
	3000 K	999 lm	
	4000 K	1050 lm	

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white

Order options

COLOUR TEMPERATURE	
2700K	4
3000K	5
3500K	7
4000K	6

CONTROL

DALI-2

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9


MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8


BEAM ANGLE

wide flood 67°



SPOTLIGHT ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1W	2700K	961lm	030-78203
	3000K	999lm	
	4000K	1050lm	



DOWNLIGHT SUSPENDED FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
8.1W	2700K	961lm	030-79203
	3000K	999lm	
	4000K	1050lm	

Mounting accessories

HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	030-100001

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour white





BO PRO

spotlight inset 10

Quickinfo

2700K, 3000K, 3500K, 4000K
CRI ≥ 90, 2 SDCM
up to 2200lm | 131lm/W
DALI-2

Types

BO PRO 35	BO PRO 45	BO PRO 55
		
86 ø 35	98 ø 45	110 ø 55

Colours



Light distributions




changeable optic
and accessories




flush adapter
mounting



flex inset for
curve elements



oval lens for oval
light illumination



360° rotatable
90° tiltable

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
3500 K	7
4000 K	6

CONTROL

DALI-2	
--------	--

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● raw aluminium	0

BEAM ANGLE

BO PRO 35	▲
spot 20°	S
medium 30°	M
flood 38°	F
wide flood 50°	W


BO PRO 45

spot 20°	S
medium 31°	M
flood 39°	F
wide flood 50°	W

BO PRO 55

spot 20°	S
medium 24°	M
flood 37°	F
wide flood 46°	W

BO PRO 35




ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.7 W	4000 K	836 lm	030-5500:3▲

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.7 W	4000 K	836 lm	030-8500:3▲

BO PRO 45




ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.0 W	4000 K	1425 lm	030-5510:3▲

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.0 W	4000 K	1425 lm	030-8510:3▲

BO PRO 55



ADJUSTABLE

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4 W	4000 K	2200 lm	030-5520:3▲

ADJUSTABLE FLEX

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.4 W	4000 K	2200 lm	030-8520:3▲

Optical accessories

see next page

Exchangeable optics

see next page

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for 4000 K, CRI ≥ 90, colour white, medium 2700 K -5%, 3000 K -2%, 3500 K -1%

Order options

MATERIAL COLOUR	▣
○ traffic white RAL 9016	7
● jet black RAL 9005	8
● raw aluminium	0

BEAM ANGLE BO PRO 35	▲
medium 30°	M
flood 38°	F
wide flood 50°	W

BEAM ANGLE BO PRO 45	▲
medium 31°	M
flood 39°	F
wide flood 50°	W

BEAM ANGLE BO PRO 55	▲
medium 24°	M
flood 37°	F
wide flood 46°	W

Optical accessories

HONEYCOMB LOUVER black

TYPE	ORDER CODE
BO PRO 35	005-5420218
BO PRO 45	005-5420318
BO PRO 55	005-5420418

OVAL LENS

TYPE	ORDER CODE
BO PRO 35	005-5421210
BO PRO 45	005-5421310
BO PRO 55	005-5421410

SOFT LENS

TYPE	ORDER CODE
BO PRO 35	005-5422210
BO PRO 45	005-5422310
BO PRO 55	005-5422410

WALLWASHER LENS

TYPE	ORDER CODE
BO PRO 35	005-5423210
BO PRO 45	005-5423310
BO PRO 55	005-5423410

LONG SNOOT

TYPE	ORDER CODE
BO PRO 35	005-542421▣
BO PRO 45	005-542431▣
BO PRO 55	005-542441▣

Exchangeable optics

LENS

TYPE	ORDER CODE
BO PRO 35	005-5412218▲
BO PRO 45	005-5412318▲
BO PRO 55	005-5412418▲




Fashion Store
Visualisation



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 , 3 SDCM
 up to 1350 lm | 153 lm/W
 UGR ≤ 19 / $65^\circ \leq 1500$ cd/m²
 L90 @ 50 000 h
 DALI-2
 louver, spotline

Types



Colours




Light distribution



CUBIS

inset



single luminaire
available



high efficiency
up to 153 lm/W

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
3500 K	2
4000 K	1

CONTROL

DALI-2

HOUSING COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8

LOUVER COLOUR

chrome reflector	4
black reflector	8

SPOTLINE COLOUR

traffic white RAL 9016	7
jet black RAL 9005	8



CUBIS 2x2



LOUVER | SUPER WIDE FLOOD


SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
2.3 W, 200 mA	3000 K	335 lm	030-5600::3■■X

SPOTLINE | MEDIUM

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
2.3 W, 200 mA	3000 K	325 lm	030-5700::3■□M

SPOTLINE | WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
2.3 W, 200 mA	3000 K	325 lm	030-5700::3■□W



CUBIS 3x3



LOUVER | SUPER WIDE FLOOD


SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.1 W, 200 mA	3000 K	750 lm	030-5610::3■■X

SPOTLINE | MEDIUM

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.1 W, 200 mA	3000 K	730 lm	030-5710::3■□M

SPOTLINE | WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
5.1 W, 200 mA	3000 K	730 lm	030-5710::3■□W



CUBIS 4x4



LOUVER | SUPER WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
9.0 W, 400 mA	3000 K	1340 lm	030-5620::3■■X

SPOTLINE | MEDIUM

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
9.0 W, 400 mA	3000 K	1300 lm	030-5720::3■□M

SPOTLINE | WIDE FLOOD

SYSTEM POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
9.0 W, 400 mA	3000 K	1300 lm	030-5720::3■□W

LUMINOUS FLUX value calculated for
3000 K, CRI ≥ 90, louver chrome or spotline white
2700 K -4 %, 3500 K +6 %, 4000 K +6 %