



MOVE IT 25 S system

trimless/surface/suspended


EN Thin extruded aluminium profile with 31mm height and 28mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional with indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking

ES Perfil de aluminio extrusionado plano con una altura de 31mm y con ancho de junta de 28mm; disponible para el encastre sin bordes en techos de cartón yeso (montaje en pared o techo) de 12,5mm de espesor; o para montaje sobre pared/techo o suspendido (suspensión por cable, ajuste de altura sin herramienta, cable de alimentación negro incluido); opcional con componentes de luz indirectos para el realce adicional del techo; para sistemas de iluminación; lineal, conector acodado de 90° o elemento CURVE de 90°; con perfil de riel electrificado integrado para la recepción de la tensión de alimentación y DALI; superficie anodizada o recubierto de polvo; montaje flexible y sin herramienta de los elementos insertables mediante un soporte magnético con bloqueo

Quickinfo

3000K
CRI ≥ 90, 2 SDCM
up to 118lm/W
L80 @ 50 000h
non DIM, DALI-2

Types



connector



corner



curve


Colours



standard



xal.com/colours



custom cut on
building site

Order options

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005


Options on request

CONNECTOR

T-connector
X-connector

INSTALLATION TRACK

acoustic soft ceilings



MOVE IT 25 S trimless



INSTALLATION TRACK

L (mm)		ORDER CODE
617	channel	050-72120÷8
1217	channel	050-72140÷8
2417	channel	050-72180÷8
3622	channel	050-72190÷8
cust. cut	channel (non DIM)	E83131 · · · · 8
cust. cut	channel (DALI-2)	E83141 · · · · 8
672x645	channel corner* 90°	050-72110÷8
661x661	channel corner* ceiling to wall 90°	050-72111÷8

*incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-7210008

BLIND COVER

L (mm)	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000 · · · · 8B

blind cover can be shortened as desired

CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321÷0
mechanical linear connector (pair)	050-2011110


POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5mm ²	050-2020110
DALI-2 2×2,5 + 2×0,5mm ²	050-2020130

cable length 500 mm

Electrical accessories

see following pages



Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR





CABLE SUSPENSION

chrome	0
black	8

Options on request

CONNECTOR

T-connector	
X-connector	



MOVE IT 25 S surface / suspended



INSTALLATION TRACK / BLIND COVER

L (mm)

620	channel
1220	channel
2420	channel
3625	channel
cust. cut	channel (non DIM)
cust. cut	channel (DALI-2)
637x610	channel corner* 90°
666x666	channel corner* ceiling to wall 90°

*incl. electrical connector set

1217	blind cover
2417	blind cover
3622	blind cover
cust. cut	blind cover

ORDER CODE

050-73120	
050-73140	
050-73180	
050-73190	
E83151	
E83161	
050-73110	
050-73111	

050-7004008	
050-7008008	
050-7009008	
E83000	

CURVE CONNECTOR

TYPE

mechanical & electrical R 300 mm
mechanical R 300 mm

ORDER CODE

050-731303	
050-731311	

Accessories

END CAPS

TYPE

end caps (pair)

ORDER CODE

050-731000	
------------	--

CONNECTOR SET

TYPE

mechanical linear conn. incl. 1500 mm cable susp.
mechanical linear connector surface
mechanical & electrical linear connector

ORDER CODE

050-201131	
050-2011410	
050-2031230	

POWER FEEDER UNIT

TYPE

TYPE	L (mm)
non DIM 2×2,5mm ²	2000
DALI-2 2×2,5 + 2×0,5mm ²	2000
non DIM 2×2,5mm ²	4000
DALI-2 2×2,5 + 2×0,5mm ²	4000

ORDER CODE

050-2022110	
050-2022130	
050-2024110	
050-2024130	

CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

TYPE

TYPE	L (mm)
ceiling fastener	67
cable suspension*	1500
canopy	
wall mounting accessory	

ORDER CODE

050-204111	
005-215211	
005-231171	
050-2044118	

*use every 1200 mm

Electrical accessories

see following pages

Order options

COLOUR TEMPERATURE

3000 K

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR
CABLE SUSPENSION

chrome	0
black	8

Options on request

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM





COLOUR TEMPERATURE

2700 K	
4000 K	
tunable white 2700–6500 K*	

*DALI-2 DT8

CONNECTOR

T-connector	
X-connector	



MOVE IT 25 S suspended indirect



INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-74125
2420	33 W	3890 lm	050-74185
3625	51 W	6000 lm	050-74195
637x610	13.1 W	1550 lm	050-74110
corner*			

incl. chrome cable suspension for L=2420/3625 mm
no custom cut on building side; *incl. electrical connector set

1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 ···· 8B

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-731000

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm ²	2000	050-2022110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	2000	050-2022130
non DIM 2 × 2,5 mm ²	4000	050-2024110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	4000	050-2024130

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

*use every 1200 mm

Electrical accessories

see following pages



MOVE IT 25 system

trimless / surface / suspended


EN Extruded aluminium profile with 28 mm width groove; for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; node connectors, up to 6 profile connection options; with power track profile for take off of supply voltage and DALI signal; surf. anod. or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking; sound absorbing accessories available

ES Perfil de aluminio extruido con ancho de junta de 28 mm; para encastre sin bordes en planchas cartón yeso (montaje pared o techo) de 12,5 mm espesor; o para montaje sobre pared/techo o suspendido (suspensión por cable, ajuste de altura sin herramienta, cable de alimentación negro incluido); opcional componentes de luz indirectos para el realce adicional del techo; para sistemas de iluminación; lineal, conector acodado de 90° o elemento CURVE de 90°; conector de nodos, conexión de hasta 6 perfiles; con perfil de rail electrificado para la recepción de la tensión de alimentación y DALI; superf. anodiz. o recub. de polvo; montaje flexible y sin herramienta de los elementos insertables mediante un soporte magnético con bloqueo; disponible accesorio para la absorción del ruido


Quickinfo

3000K
CRI ≥ 90, 2 SDCM
up to 118 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



connectors



node



corner



curve


Colours




standard



xal.com/colours



custom cut on
building site



acoustic
elements

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005






Options on request

CONNECTOR

T-connector
X-connector

INSTALLATION TRACK

acoustic soft ceilings



MOVE IT 25 trimless



INSTALLATION TRACK

L (mm)

		ORDER CODE
617	channel	050-72020-8
1217	channel	050-72040-8
2417	channel	050-72080-8
3622	channel	050-72090-8
cust. cut	channel (non DIM)	E83031-8
cust. cut	channel (DALI-2)	E83041-8
672x645	channel corner* 90°	050-72010-8
661x661	channel corner* ceiling to wall 90°	050-72011-8

*incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-7200008

BLIND COVER

L (mm)	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000-8B

blind cover can be shortened as desired

CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321-0
mechanical linear connector (pair)	050-2011110

POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5mm ²	050-2020110
DALI-2 2×2,5 + 2×0,5mm ²	050-2020130

cable length 500 mm

Electrical accessories

see following pages

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
○ traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX / END CAP

● jet black RAL 9005	8
○ traffic white 9016 / jet black 9005 P	
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR

CABLE SUSPENSION







chrome	0
black	8

NODE CONNECTOR

MOUNTING TYPE

surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X



MOVE IT 25 surface/suspended



INSTALLATION TRACK / BLIND COVER

L (mm)		ORDER CODE
620	channel	050-73020
1220	channel	050-73040
2420	channel	050-73080
3625	channel	050-73090
cust. cut	channel (non DIM)	E83051
cust. cut	channel (DALI-2)	E83061
637x610	channel corner* 90°	050-73010
666x666	channel corner* ceiling to wall 90°	050-73011
*incl. electrical connector set		
1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 ··· 8B

CURVE CONNECTOR

TYPE	ORDER CODE
mechanical & electrical R 300 mm	050-730303
mechanical R 300 mm	050-730311

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000

NODE CONNECTOR

TYPE	ORDER CODE
NODE surface mounted	050-203333
NODE surface mounted incl. feeder	050-202243
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-730010

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical linear connector surface	050-2011410
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2×2,5 mm ²	2000	050-2022110
DALI-2 2×2,5 + 2×0,5 mm ²	2000	050-2022130
non DIM 2×2,5 mm ²	4000	050-2024110
DALI-2 2×2,5 + 2×0,5 mm ²	4000	050-2024130

CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

TYPE	L (mm)	ORDER CODE
ceiling fastener	67	050-204111
cable suspension*	1500	005-215211
canopy		005-231171
wall mounting accessory		050-2044118

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages

Order options

COLOUR TEMPERATURE

3000 K

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX/END CAP

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR

CABLE SUSPENSION

chrome	0
black	8

NODE CONNECTOR

MOUNTING TYPE

surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X

Options on request

COLOUR RENDERING INDEX






CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

2700 K
4000 K
tunable white 2700–6500 K*

*DALI-2 DT8

LUMINOUS FLUX value calculated for
3000 K, CRI ≥ 90, colour white/black



MOVE IT 25 suspended indirect



INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-74025
2420	33 W	3890 lm	050-74085
3625	51 W	6000 lm	050-74095
637x610	13.1 W	1550 lm	050-74010
corner*			

incl. chrome cable suspension for L=2420/3625 mm
no custom cut on building side; *incl. electrical connector set

1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 ···· 8 B

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000

NODE CONNECTOR

TYPE	ORDER CODE
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-730010

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm ²	2000	050-2022110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	2000	050-2022130
non DIM 2 × 2,5 mm ²	4000	050-2024110
DALI-2 2 × 2,5 + 2 × 0,5 mm ²	4000	050-2024130

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages







Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



Electrical accessories

POWER SUPPLY INTRACK supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
100 W □ PC II η 92 %		intrack	403-26-46	050-2071038
150 W □ PC II η 92 %		intrack	403-26-46	050-2071138

incl. feeder cable 2000 mm; ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY SURFACE supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		surface	305-144-54	050-20551
100 W □ PC II η 92 %		surface	455-104-40	050-20554
150 W □ PC II η 92 %		surface	455-104-40	050-20552
250 W □ PC II η 93 %		surface	455-104-40	050-20555
320 W ⊕ PC I η 94 %		surface	305-144-54	050-20553

ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		external	163-43-32	002-62133
100 W □ PC II η 92 %		external	350-30-18	002-62134
150 W □ PC II η 92 %		external	350-30-18	002-62135
250 W □ PC II η 93 %		external	400-40-22	002-62139
320 W ⊕ PC I η 94 %		external	252-90-44	002-60320

ENEC approved

POWER SUPPLY BASIC 48 V

220-240 V | 50-60 Hz | □ PC II | Lifetime @ 120 W, 45° ambient temp. cascable max. 3 devices

TYPE	EFFICIENCY/LIFETIME	W-H-D (mm)	ORDER CODE
160 W η 94.5 % / > 100.000 h		72-90-63	005-6520210

DIN RAIL POWER SUPPLY PRO 48 V

220-240 V | 50-60 Hz | ⊕ PC I | MTBF @ 55° ambient temperature cascable max. 5 devices (240 W) or 3 devices (480 W)

TYPE	EFFICIENCY/MTBF	W-H-D (mm)	ORDER CODE
240 W η 92 % / > 400.000 h		60-125-100	005-6220110
480 W η 93 % / > 350.000 h		120-125-100	005-6220210

DIN RAIL DALI SELV DEVICE

TYPE	W-H-D (mm)	ORDER CODE
control unit	36-86-58	005-6620030

DALI-2 SELV DEVICE

TYPE	L-W-H (mm)	ORDER CODE
control unit	213-37-26	050-2061130

necessary to create DALI-2 SELV signal; DALI power supply integrated

DALI SENSOR

TYPE	L-W-H (mm)	ORDER CODE
ESSENTIAL sensor (brightness & presence)	125-28-45	050-2063178

WIRELESS TO DALI-2 CONTROL DEVICE

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2065230

DALI-2 SELV device required

WIRELESS TO DALI-2 REPEATER


TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2066230

MIDDLE FEED

TYPE	ORDER CODE
DALI-2 2×2,5 + 2×0,5 mm ²	050-2038130

cable length 2000 mm

Blique by Nobis
Stockholm, SE –
by Wingårdh

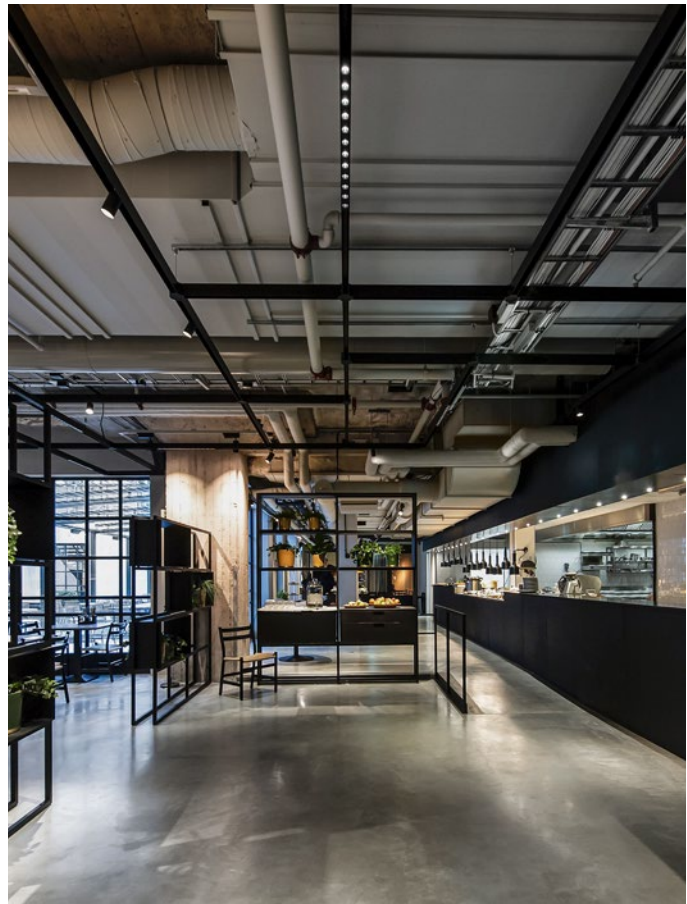



JUST

spotlight inset 25/25S

Quickinfo

2700K, 3000K, 4000K, TW, CWD
CRI ≥ 90, 2 SDCM
non DIM, DALI-2

L95 @ 50 000h
JUST 32 focus up to 78lm/W


L80 @ 50 000h
JUST 45 up to 92lm/W

L90 @ 50 000h
JUST 55 up to 109lm/W

Types

JUST 32 focus	JUST 45	JUST 55
		
73 ø 32	88 ø 45	100 ø 55

Colours



Light distributions

JUST 32 focus



focus

JUST 45




super spot med. flood

JUST 55



spot med. flood



TW 1800-3000K
or 2700-6500K

CWD
2000-3000K

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1
colour warm dim. 2000–3000 K*	
tunable white 1800–3000 K**	
tunable white 2700–6500 K**	

*DALI-2 **DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

BEAM ANGLE JUST 45

medium 23°	M
flood 44°	F




BEAM ANGLE JUST 55

spot 16°	S
medium 23°	M
flood 37°	F

Options on request

OPTICAL ACCESSORIES

elliptical sculpture foil
snoot
colour filter (red, blue, green, etc.)
only for JUST 32 focus



JUST 32 focus 17–43°



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
5.5 W	411 lm	050-0111

JUST 45



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
6.0 W super spot 8°	285 lm	050-0131
10.9 W	960 lm	050-0131
10.7 W CWD 2000–3000 K	560 lm	050-0131E3
11 W TW 1800–3000 K	555 lm	050-0131L3
11 W TW 2700–6500 K	683 lm	050-0131D3

JUST 55



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
12.7 W	1330 lm	050-0143
19.1 W	1820 lm	050-0142

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
JUST 32 focus	30·4	007-1965178
JUST 45	42·3	007-1965188
JUST 55	50·3	007-1965598

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965880
JUST 55	50·3	007-1965890

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965980
JUST 55	50·3	007-1965990

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42·3	007-1965780
JUST 55	50·3	007-1965790

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, lens flood 2700 K -5%, 4000 K +5%



MOVE IT 25 SYSTEM



reddot award 2019
winner



DESIGN
AWARD
2019


PIVOT

graphic light inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI $\geq$ 90, 3 SDCM
up to 123 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types




Colour




Light distribution



opal



tunable white
2700–6500 K



CRI $\geq$ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
tunable white 2700–6500 K*	D

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX


CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

4000 K

MATERIAL COLOUR

○ traffic white RAL 9016




LIGHT INSET 25S




PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 1 3 1 2 :: 8 0
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 1 3 1 3 :: 8 0
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 1 3 1 4 :: 8 0
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 1 3 1 5 :: 8 0
	3000 K	3350 lm		
27.7 W	2700 K	4020 lm	1810	0 5 0 - 1 3 1 6 :: 8 0
	3000 K	4020 lm		

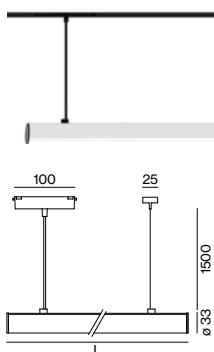

PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 0 3 2 2 :: 8 0
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 0 3 2 3 :: 8 0
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 0 3 2 4 :: 8 0
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 0 3 2 5 :: 8 0
	3000 K	3350 lm		




LIGHT INSET 25/45



PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 0 3 1 2 :: 8 0
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 0 3 1 3 :: 8 0
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 0 3 1 4 :: 8 0
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 0 3 1 5 :: 8 0
	3000 K	3350 lm		
27.7 W	2700 K	4020 lm	1810	0 5 0 - 0 3 1 6 :: 8 0
	3000 K	4020 lm		

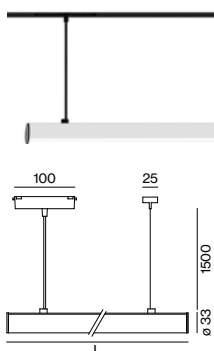

PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 0 3 2 2 :: 8 0
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 0 3 2 3 :: 8 0
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 0 3 2 4 :: 8 0
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 0 3 2 5 :: 8 0
	3000 K	3350 lm		



FLEXTRACK

system extension 25/25S


EN Thin extruded aluminium profile with 31mm height and 28mm width groove; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; for installation in two MOVE IT 25 or 25 S profiles; profile can be installed and moved without tools by means of magnetic holders+locking; mount 360° rotatable and freely slidable on one end; light insets can be installed flexibly and without tools by means of magnetic holders+locking

ES Perfil de aluminio extruido plano de 31mm de alto y 28 mm de ancho de junta; con perfil de carril electrificado integrado para toma de suministro electr. y señal DALI; superficie anodiz. o recub. de pintura en polvo; para inserción en dos perfiles MOVE IT 25 o MOVE IT 25 S; perfil insertable y desplazable sin herramienta mediante soporte magnético con bloqueo; soporte girable a 360° y libremente desplazable en un extremo; montaje flexible y sin herramienta de los elementos de luz mediante soporte magnético con bloqueo

Quickinfo

non DIM, DALI-2

Types



Colours




Order options

CONTROL		◆
non DIM	1	
DALI-2	3	

MATERIAL COLOUR		▣
● jet black RAL 9005	8	
● traffic white 9016 / jet black 9005	P	
● gold dust 260-M / jet black 9005	G	
● special colours*	X	

*inside always in black


MOVE IT 25 S



FLEXTRACK


L (mm)	ORDER CODE
620	050-75120 ◆ ▣
920	050-75130 ◆ ▣
1220	050-75140 ◆ ▣
1520	050-75150 ◆ ▣
1820	050-75160 ◆ ▣

MOVE IT 25



FLEXTRACK


L (mm)	ORDER CODE
620	050-75020 ◆ ▣
920	050-75030 ◆ ▣
1220	050-75040 ◆ ▣
1520	050-75050 ◆ ▣
1820	050-75060 ◆ ▣

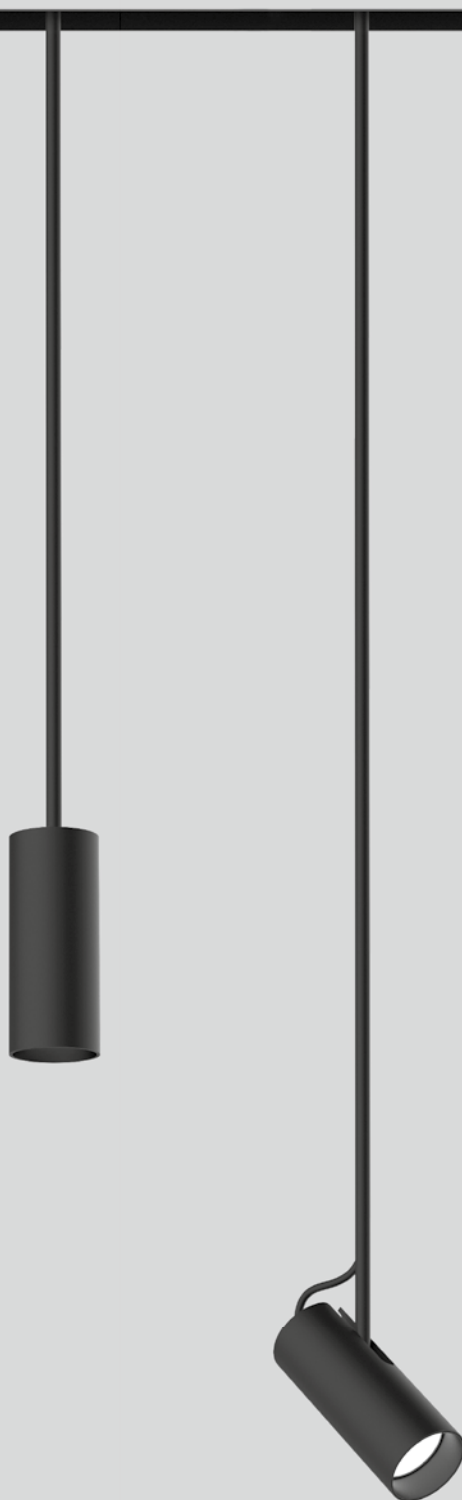

Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI ≥ 90, 3 SDCM
up to 84 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types



Colours



Light distributions




reddot winner 2020




ARY rod

decorative inset 25/25S/45



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

CABLE SUSPENSION

1500mm	5
2000mm with hook*	6

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200–4000 K*	

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

ACCESSORY COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE

medium 25°	M
flood 44°	F



ARY rod



DOWNLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 2 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	050-0 2 1 D 3

ARY rod adjustable



SPOTLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 3 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	050-0 3 1 D 3



Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	050-151011
MOVE IT 25/45	50-91	050-051011



RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	050-051021



Optical accessories

HONEYCOMB LOUVER AND LENSES


TYPE	Ø-H (mm)	ORDER CODE
honeycomb louver	42-3	007-1965188
oval lens	42-3	007-1965880
soft lens	42-3	007-1965980
wallwasher lens	42-3	007-1965780



Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI ≥ 90, 3 SDCM
up to 3510 lm | 86 lm/W
L80 @ 50 000 h
DALI-2

Types

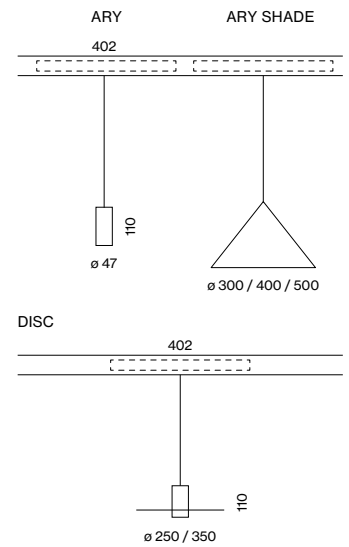

Colours



Light distributions




reddot winner 2024




ARY cable


decorative inset 25 / 25S / 45



free positioning
by ring and hook



tunable white
2200 – 4000 K

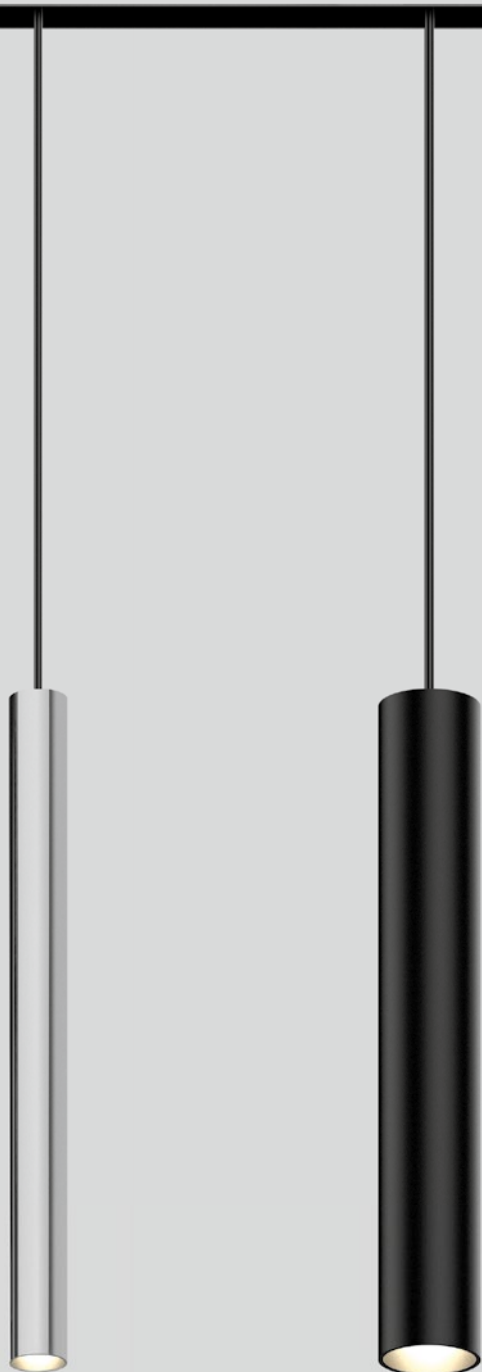


TULA

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI ≥ 90, 3 SDCM
up to 75 lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types




Colours



Light distributions



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

HOUSING HEIGHT	L
300 mm	0
500 mm	1

CABLE SUSPENSION	⌘
1500 mm	7
2000 mm with hook*	8

*one ring included

COLOUR TEMPERATURE	⬢
2700 K	4
3000 K	5
tunable white 2200 – 4000 K*	

*DALI-2 DT8

CONTROL	⬢
non DIM	1
DALI-2	3


MATERIAL COLOUR	☑
● chrome	4
○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR	■
○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE	▲
medium 24°/25°	M
flood 30°/44°	F

Options on request

COLOUR TEMPERATURE
4000 K




TULA nano suspended



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11 W	2700 K	642 lm	0 5 0 - L ⌘ 1 1 ⬢ ⬢ ▲
	3000 K	688 lm	



TULA micro suspended




DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	998 lm	0 5 0 - L ⌘ 1 5 ⬢ ⬢ ▲
	3000 K	1048 lm	
5.4 W	2200 – 4000 K	254 lm	0 5 0 - L ⌘ 1 5 D 3 ⬢ ▲

Mounting accessories

RING track mounted



TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1 ■

RING ceiling mounted




TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1 ■

Optical accessories

HONEYCOMB LOUVER AND LENSES

TYPE	Ø-H (mm)	ORDER CODE
TULA micro honeycomb louver	42-3	0 0 7 - 1 9 6 5 1 8 8
TULA micro oval lens	42-3	0 0 7 - 1 9 6 5 8 8 0
TULA micro soft lens	42-3	0 0 7 - 1 9 6 5 9 8 0
TULA micro wallwasher lens	42-3	0 0 7 - 1 9 6 5 7 8 0

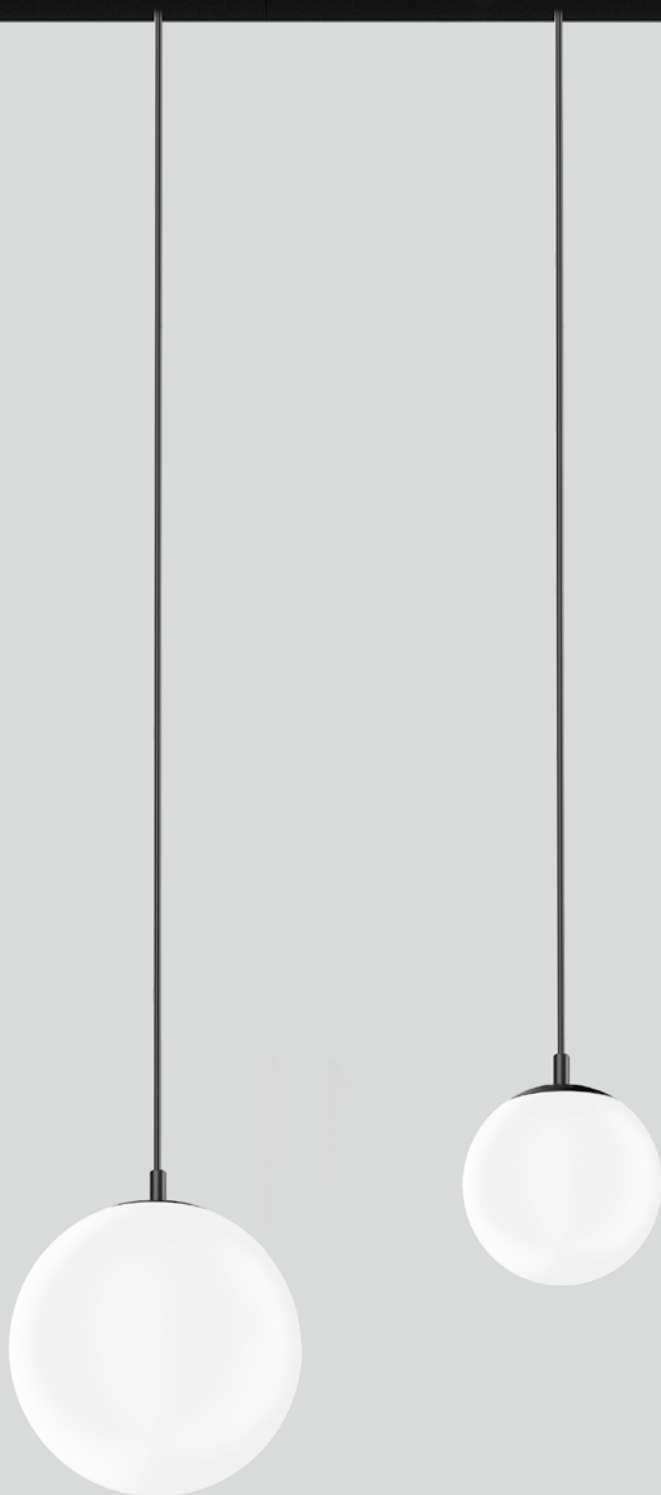


PAL

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K
CRI ≥ 90, 3 SDCM
up to 55 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



Colours



Light distribution



Order options


CABLE SUSPENSION	⚙
1500mm	5
2000mm with hook*	6
*one ring included	

COLOUR TEMPERATURE	⚙
2700 K	4
3000 K	5


CONTROL	⚙
non DIM	1
DALI-2	3

MATERIAL COLOUR	☑
○ pure white RAL 9010	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR	■
○ pure white RAL 9010	7
● jet black RAL 9005	8



PAL suspended



DOWNLIGHT

INS. POWER	COLOUR TEMP.	LUM. FLUX	Ø (mm)	ORDER CODE
9.1W	2700 K	472lm	80	0 5 0 - 1 ⚙ 1 1 ⚙ ⚙ ☑
	3000 K	498lm		
9.1W	2700 K	472lm	120	0 5 0 - 1 ⚙ 1 3 ⚙ ⚙ ☑
	3000 K	498lm		


Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1 ■

RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1 ■




INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI≥90, colour white, glass

**Quickinfo**

2700 K
CRI ≥ 95, 3 SDCM
up to 72 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types**Colours**

WASTBERG+

CONE SUSPENDED XS

Design by Claesson Koivisto Rune

Order options

CABLE SUSPENSION

3000 mm	5
3000 mm with hook	6

COLOUR TEMPERATURE

2700 K

CONTROL


non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

ACCESSORY COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8




CONE SUSPENDED XS W151XS1



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	544lm	050-04814




CONE SUSPENDED XS W151XS2



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	572lm	050-04824




CONE SUSPENDED XS W151XS3



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	572lm	050-04834

Mounting accessories



RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	050-151011
MOVE IT 25/45	50-91	050-051011



RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	050-051021

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white

SPOT LINE / OPAL

linear inset 25


Quickinfo

2700 K, 3000 K, TW (opal)
 CRI ≥ 90 , 3 SDCM
 SPOT LINE up to 82lm/W
 OPAL up to 101lm/W
 L80 @ 50 000 h
 non DIM, DALI-2


Types

MOVE IT 25



SPOT LINE




OPAL



Light distributions



tunable white
1800–4000 K



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
tunable white 1800–4000 K*	L

*only available for opal high performance inset | DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005


Options on request

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

4000 K




LIGHT INSET 25




SPOT LINE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
4.5 W	2700 K	336lm	155	0 5 0 - 0 2 2 0 :: 8 M
	3000 K	363lm		
8.9 W	2700 K	673lm	305	0 5 0 - 0 2 2 1 :: 8 M
	3000 K	726lm		
17.9 W	2700 K	1350lm	605	0 5 0 - 0 2 2 2 :: 8 M
	3000 K	1450lm		



OPAL HIGH PERFORMANCE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	451lm	305	0 5 0 - 0 2 1 1 :: 8 H
	3000 K	484lm		
10.6 W	2700 K	902lm	605	0 5 0 - 0 2 1 2 :: 8 H
	3000 K	968lm		
21.3 W	2700 K	1800lm	1205	0 5 0 - 0 2 1 4 :: 8 H
	3000 K	1940lm		
43 W	2700 K	3610lm	2405	0 5 0 - 0 2 1 8 :: 8 H
	3000 K	3870lm		



LIGHT INSET 25 S




OPAL HIGH PERFORMANCE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	402lm	305	0 5 0 - 1 2 1 1 :: 8 H
	3000 K	432lm		
10.6 W	2700 K	805lm	605	0 5 0 - 1 2 1 2 :: 8 H
	3000 K	864lm		
21.3 W	2700 K	1610lm	1205	0 5 0 - 1 2 1 4 :: 8 H
	3000 K	1730lm		
43 W	2700 K	3220lm	2405	0 5 0 - 1 2 1 8 :: 8 H
	3000 K	3460lm		

canyon solution for MOVE IT 25

Light distribution



spot line

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

WALLWASHER

linear inset 25/25S


Quickinfo

2700 K, 3000 K
CRI ≥ 90 , 3 SDCM
WALLWASHER up to 81lm/W
WW flush up to 82lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types

MOVE IT 25

WALLWASHER




WALLWASHER flush



MOVE IT 25 S


WALLWASHER flush



Light distribution



wall
washer



CRI ≥ 98
XPECTRUM

Order options


COLOUR TEMPERATURE		••
2700 K	4	
3000 K	5	
CONTROL		◆
non DIM	1	
DALI-2	3	

MATERIAL COLOUR	
● jet black RAL 9005	

Options on request

COLOUR RENDERING INDEX	
CRI ≥ 98 XPECTRUM	

COLOUR TEMPERATURE	
4000 K	




LIGHT INSET 25



WALLWASHER

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
13 W	2700 K	983 lm	450	0 5 0 - 0 2 3 2 •• 3 8 A
	3000 K	1050 lm		



WALLWASHER FLUSH


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	0 5 0 - 0 2 1 1 •• ◆ 8 A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	0 5 0 - 0 2 1 2 •• ◆ 8 A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	0 5 0 - 0 2 1 4 •• ◆ 8 A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	0 5 0 - 0 2 1 8 •• ◆ 8 A
	3000 K	3630 lm		

Optical accessories

ANTI-GLARE GRID

TYPE	L-W (mm)	ORDER CODE
WALLWASHER FLUSH	303-25	0 5 0 - 0 2 3 0 9 1 8

cluster solution to create anti-glare grid for all lengths




LIGHT INSET 25 S




WALLWASHER FLUSH

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	0 5 0 - 1 2 1 1 •• ◆ 8 A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	0 5 0 - 1 2 1 2 •• ◆ 8 A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	0 5 0 - 1 2 1 4 •• ◆ 8 A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	0 5 0 - 1 2 1 8 •• ◆ 8 A
	3000 K	3630 lm		

Light distributions



wallwasher



wallwasher flush

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black


Quickinfo

2700 K, 3000 K
 CRI ≥ 90 , 3 SDCM
 WALL GRAZER up to 107lm/W
 BATWING up to 104lm/W
 L80 @ 50 000 h
 non DIM, DALI-2

Types

MOVE IT 25 S

WALL GRAZER / BATWING




Light distributions



WALL GRAZER/BATWING

linear inset 25S




CRI ≥ 98
 XPECTRUM

Order options

COLOUR TEMPERATURE		••
2700 K	4	
3000 K	5	
CONTROL		◆
non DIM	1	
DALI-2	3	
MATERIAL COLOUR		
● jet black RAL 9005		

Options on request

COLOUR RENDERING INDEX	
CRI ≥ 98 XPECTRUM	
COLOUR TEMPERATURE	
4000 K	




LIGHT INSET 25 S



WALL GRAZER


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	525 lm	305	0 5 0 - 1 2 1 1 : 8 S
	3000 K	564 lm		
10.6 W	2700 K	1050 lm	605	0 5 0 - 1 2 1 2 : 8 S
	3000 K	1130 lm		
21.3 W	2700 K	2100 lm	1205	0 5 0 - 1 2 1 4 : 8 S
	3000 K	2260 lm		
43 W	2700 K	4200 lm	2405	0 5 0 - 1 2 1 8 : 8 S
	3000 K	4510 lm		




BATWING

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	512 lm	305	0 5 0 - 1 2 1 1 : 8 B
	3000 K	550 lm		
10.6 W	2700 K	1020 lm	605	0 5 0 - 1 2 1 2 : 8 B
	3000 K	1100 lm		
21.3 W	2700 K	2050 lm	1205	0 5 0 - 1 2 1 4 : 8 B
	3000 K	2200 lm		
43 W	2700 K	4100 lm	2405	0 5 0 - 1 2 1 8 : 8 B
	3000 K	4400 lm		

Light distributions



wall grazer



batwing

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black