





Quickinfo

3000K
CRI ≥ 90, 2 SDCM
up to 118lm/W
L80 @ 50 000h
non DIM, DALI-2

Types



connector



Colours




MOVE IT 45 system


trimless / surface / suspended

EN Extruded aluminium profile with 45mm width groove; for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional with indirect light component for additional accentuation of the ceiling; for lighting systems, 90° angle connectors for flexible system design; node connectors, up to 4 profile connection options; with power track profile for take off of supply voltage and DALI signal; surf. anod. or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking; sound absorbing accessories available

DE Aluminiumstrangpressprofil mit 45mm Fugenbreite; für randlosen Einbau in Gipskartondecken (Wand- oder Deckenmontage) mit 12,5mm Deckenstärke; oder für Wand-/Deckenanbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung, inkl. schwarzer Einspeiseleitung); optional mit indirekter Lichtkomponente für zusätzliche Akzentuierung der Decke; für Lichtsysteme, 90° Winkelverbinder für flexiblen Systemaufbau; Knotenverbinder, bis zu 4 Profilanschlussmöglichkeiten; mit Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfl. elox. bzw. pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze durch Magnethalterung + Verriegelung; schallabsorbierendes Zubehör erhältlich



custom cut on building site



acoustic elements

Order options

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005




Options on request

CONNECTOR

T-connector
X-connector

INSTALLATION TRACK

acoustic soft ceilings



MOVE IT 45 trimless



INSTALLATION TRACK

L (mm)		ORDER CODE
617	channel	050-72320➦8
1217	channel	050-72340➦8
2417	channel	050-72380➦8
3622	channel	050-72390➦8
cust. cut	channel (non DIM)	E83551.....8
cust. cut	channel (DALI-2)	E83521.....8
692x648	channel corner* 90°	050-72310➦8
661x661	channel corner* ceiling to wall 90°	050-72311➦8

*incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-7230008

BLIND COVER

L (mm)	ORDER CODE
1217	050-7034008
2417	050-7038008
3622	050-7039008
custom cut	E83500.....8B

blind cover can be shortened as desired

CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321➦0
mechanical linear connector (pair)	050-2011110



POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5mm ²	050-2020110
DALI-2 2×2,5 + 2×0,5mm ²	050-2020130

cable length 500 mm

Electrical accessories

see following pages



Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	G
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX / END CAP

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	P
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

NODE CONNECTOR

MOUNTING TYPE


surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X

MATERIAL COLOUR

CABLE SUSPENSION

chrome	0
black	8



MOVE IT 45 surface / suspended



INSTALLATION TRACK

L (mm)		ORDER CODE
620	channel	050-73320
1220	channel	050-73340
2420	channel	050-73380
3625	channel	050-73390
cust. cut	channel (non DIM)	E83561
cust. cut	channel (DALI-2)	E83531
653x609	channel corner* 90°	050-73310
666x666	channel corner* ceiling to wall 90°	050-73311

*incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-73300

BLIND COVER

L (mm)	ORDER CODE
1217	050-7034008
2417	050-7038008
3622	050-7039008
custom cut	E83500 · · · · 8B

blind cover can be shortened as desired

NODE CONNECTOR

TYPE	ORDER CODE
NODE surface mounted	050-20333
NODE surface mounted incl. feeder	050-202243
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-733010

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical linear connector surface	050-2011410
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2×2,5 mm ²	2000	050-2022110
DALI-2 2×2,5 + 2×0,5 mm ²	2000	050-2022130
non DIM 2×2,5 mm ²	4000	050-2024110
DALI-2 2×2,5 + 2×0,5 mm ²	4000	050-2024130

CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

TYPE	L (mm)	ORDER CODE
ceiling fastener	67	050-204121
cable suspension*	1500	005-215211
canopy		005-231171
wall mounting accessory		050-2044118

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages

Order options

COLOUR TEMPERATURE

3000K

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

INSTALLATION TRACK

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● gold dust 260-M / jet black 9005 G	
● special colours*	X

*inside always in black

MATERIAL COLOUR

NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● special colours	X

MATERIAL COLOUR

NODE LTX/END CAP

● jet black RAL 9005	8
● traffic white 9016 / jet black 9005 P	
● special colours	X

MATERIAL COLOUR

ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

NODE CONNECTOR

MOUNTING TYPE

surface*	1
1500mm cable susp. chrome	3
1500mm cable susp. black	4

*only for L/T/X

MATERIAL COLOUR

CABLE SUSPENSION

chrome	0
black	8

Options on request


COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

2700K
4000K
tunable white 2700–6500K*

*DALI-2 DT8



MOVE IT 45 suspended indirect



INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2W	648lm	0 5 0 - 7 4 3 2 5
2420	33W	3890lm	0 5 0 - 7 4 3 8 5
3625	51W	6000lm	0 5 0 - 7 4 3 9 5
653x609	13.1W	1550lm	0 5 0 - 7 4 3 1 0
corner*			

incl. chrome cable suspension for L=2420/3625mm
no custom cut on building side; *incl. electrical connector set

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	0 5 0 - 7 3 3 0 0

BLIND COVER

L (mm)	ORDER CODE
1217	0 5 0 - 7 0 3 4 0 0 8
2417	0 5 0 - 7 0 3 8 0 0 8
3622	0 5 0 - 7 0 3 9 0 0 8
custom cut	E 8 3 5 0 0 8 B

blind cover can be shortened as desired

NODE CONNECTOR

TYPE	ORDER CODE
NODE cable suspension 1500mm	0 5 0 - 2 0 3 3 1
NODE cable susp. 1500mm incl. feeder	0 5 0 - 2 0 2 2 2
NODE end cap* incl. electrical connector	0 5 0 - 7 3 3 0 1 0

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500mm cable susp.	0 5 0 - 2 0 1 1 3 1
mechanical & electrical linear connector	0 5 0 - 2 0 3 1 2 3 0


POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2×2,5mm ²	2000	0 5 0 - 2 0 2 2 1 1 0
DALI-2 2×2,5 + 2×0,5mm ²	2000	0 5 0 - 2 0 2 2 1 3 0
non DIM 2×2,5mm ²	4000	0 5 0 - 2 0 2 4 1 1 0
DALI-2 2×2,5 + 2×0,5mm ²	4000	0 5 0 - 2 0 2 4 1 3 0

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	0 0 5 - 2 1 5 2 1 1
canopy		0 0 5 - 2 3 1 1 7 1

*use every 1200mm



Electrical accessories

see following pages

Acoustic elements

see following pages

LUMINOUS FLUX value calculated for
3000K, CRI ≥ 90, colour white/black








Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8



Electrical accessories

POWER SUPPLY INTRACK supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
150 W □ PC II η 92 %		intrack	453-43-48	050-2071238
250 W □ PC II η 93 %		intrack	453-43-48	050-2071338

incl. feeder cable 2000mm; ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY SURFACE supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		surface	305-144-54	050-20551
100 W □ PC II η 92 %		surface	455-104-40	050-20554
150 W □ PC II η 92 %		surface	455-104-40	050-20552
250 W □ PC II η 93 %		surface	455-104-40	050-20555
320 W ⊕ PC I η 94 %		surface	305-144-54	050-20553

ENEC approved; DALI-2 SELV device integrated

POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L-W-H (mm)	ORDER CODE
60 W □ PC II η 88 %		external	163-43-32	002-62133
100 W □ PC II η 92 %		external	350-30-18	002-62134
150 W □ PC II η 92 %		external	350-30-18	002-62135
250 W □ PC II η 93 %		external	400-40-22	002-62139
320 W ⊕ PC I η 94 %		external	252-90-44	002-60320

ENEC approved

DIN RAIL POWER SUPPLY PRO 48 V

220-240 V | 50-60 Hz | ⊕ PC I | MTBF @ 55° ambient temperature
cascadable max. 5 devices (240 W) or 3 devices (480 W)

TYPE	EFFICIENCY / MTBF	W-H-D (mm)	ORDER CODE
240 W η 92 % / > 400.000h		60-125-100	005-6220110
480 W η 93 % / > 350.000h		120-125-100	005-6220210

DIN RAIL DALI SELV DEVICE

TYPE	W-H-D (mm)	ORDER CODE
control unit	36-86-58	005-6620030

DALI-2 SELV DEVICE

TYPE	L-W-H (mm)	ORDER CODE
control unit	213-37-26	050-2061130

necessary to create DALI-2 SELV signal; DALI power supply integrated

DALI-2 SENSOR

TYPE	L-W-H (mm)	ORDER CODE
ESSENTIAL sensor (brightness & presence)	43-43-48	050-2063378
SENSE sensor (brightness, presence, temperature, sound pressure, humidity, CO ₂)	43-43-48	050-2063278

WIRELESS TO DALI-2 CONTROL DEVICE

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2065230

WIRELESS TO DALI-2 REPEATER

TYPE	L-W-H (mm)	ORDER CODE
Casambi	111-25-45	050-2066230

DALI-2 SELV device required

MIDDLE FEED

TYPE	ORDER CODE
DALI-2 2×2,5 + 2×0,5mm ²	050-2038130

cable length 2000mm



LIGHT INSET 45

linear inset 45

Quickinfo

3000K, 4000K, TW
CRI ≥ 90, 3 SDCM
DALI-2

L85 @ 50 000 h
opal/opal jut-out up to 99lm/W
microprism. (≤19) up to 77lm/W
microprism. (≤22) up to 78lm/W

L80 @ 50 000 h
UGR ≤ 19 / 65° ≤ 1500 cd/m²
L1 up to 106lm/W
L2 up to 97lm/W
L4 up to 104lm/W
L6 up to 90lm/W

L90 @ 50 000 h
UGR ≤ 19 / 65° ≤ 1500 cd/m²
L10 office up to 102lm/W
L24 office up to 120lm/W

Types

L1	L2	L4	L6	
				42
48	81	156	231	

L10 office	opal	
		42
381	605 1205	


L24 office	
	42
906	

Colour




Light distributions

med. flood		rect. med.	wall med.	wall floor	opal floor



tunable white
2700–6500K



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE	
3000K	5
4000K	6
tunable white 2700–5000 K*	D
*DALI-2 DT8	


CONTROL
DALI-2

MATERIAL COLOUR
● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX
CRI ≥ 98 XPECTRUM

CONTROL
Zigbee 3.0




LIGHT INSET 45

	CRI ≥ 90	RG0 IEC 62471	DALI 1ADDR.	III 48V	FLICKER FREE		CB pending	
--	----------	---------------	-------------	---------	--------------	--	------------	--

OPAL HIGH PERFORMANCE


INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
14.8W	3000K	1100lm	605	0 5 0 - 3 2 1 2 :: 38H
	4000K	1210lm		
29.6W	3000K	2190lm	1205	0 5 0 - 3 2 1 4 :: 38H
	4000K	2420lm		



	CRI ≥ 90	RG0 IEC 62471	DALI 1ADDR.	III 48V	
--	----------	---------------	-------------	---------	--

OPAL JUT-OUT


INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
14.8W	3000K	1160lm	605	0 5 0 - 3 2 1 2 :: 38J
	4000K	1270lm		
29.6W	3000K	2310lm	1205	0 5 0 - 3 2 1 4 :: 38J
	4000K	2550lm		



	UGR ≤ 19	CRI ≥ 90	RG0 IEC 62471	DALI 1ADDR.	III 48V	
--	----------	----------	---------------	-------------	---------	--

MICROPRISMATIC UGR ≤ 19

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.2W	3000K	636lm	605	0 5 0 - 3 2 1 2 :: 38P
	4000K	701lm		
18.3W	3000K	1270lm	1205	0 5 0 - 3 2 1 4 :: 38P
	4000K	400lm		



	UGR ≤ 22	CRI ≥ 90	RG0 IEC 62471	DALI 1ADDR.	III 48V	
--	----------	----------	---------------	-------------	---------	--

MICROPRISMATIC UGR ≤ 22

INSET POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
23W	3000K	1640lm	605	0 5 0 - 3 2 4 2 :: 38P
	4000K	1750lm		
45W	3000K	3280lm	1205	0 5 0 - 3 2 4 4 :: 38P
	4000K	3500lm		

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black

Order options

COLOUR TEMPERATURE

3000 K	5
4000 K	6
tunable white 2700–5000 K*	D

*DALI-2 DT8

CONTROL

DALI-2

LIGHT OPTIC

medium square (UGR $\leq$ 10)	E
flood square (UGR $\leq$ 19)	F

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

MATERIAL COLOUR

● jet black RAL 9005

Options on request


LIGHT OPTIC

spot round
narrow medium round
medium round (UGR $\leq$ 19)
medium square (UGR $\leq$ 10)
flood round (UGR $\leq$ 19)
flood square (UGR $\leq$ 19)
wide flood round
wide flood square
rectangular
wallwasher
wallwasher floor

LIGHT OPTIC COLOUR

gold reflector

Planning information




The icons of the light optics are shown in the reflected ceiling plan (RCP) view.

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI $\geq$ 90, colour black, reflector chrome

L1 LIGHT INSET



FLOOR

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
3.4 W	3000 K	up to 338 lm	090-9L1::3▲B■01
	4000 K	up to 359 lm	

choose one light optic ▲ from the options on the left depending on your room needs

L2 LIGHT INSET



WALL

2 × wallwasher

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.8 W	3000 K	590 lm	090-9L2::3AB001
	4000 K	633 lm	

WALL FLOOR

2 × wallwasher floor


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.8 W	3000 K	620 lm	090-9L2::3WB■01
	4000 K	662 lm	

CORRIDOR

2 × rectangular

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
6.8 W	3000 K	624 lm	090-9L2::3RB■01
	4000 K	667 lm	

L4 LIGHT INSET



FLOOR/CORRIDOR

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.6 W	3000 K	up to 1350 lm	090-9L4::3▲B■01
	4000 K	up to 1440 lm	

choose one light optic ▲ from the options on the left depending on your room needs

WALL

4 × wallwasher

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.6 W	3000 K	1180 lm	090-9L4::3AB001
	4000 K	1260 lm	

WALL

2 × wallwasher 180° + 2 × wallwasher

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.6 W	3000 K	1180 lm	090-9L4::3AB002
	4000 K	1270 lm	

WALL FLOOR

4 × wallwasher floor

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.6 W	3000 K	1240 lm	090-9L4::3WB■01
	4000 K	1310 lm	

WALL FLOOR

2 × wallwasher floor 180° + 2 × wallwasher floor

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.6 W	3000 K	1240 lm	090-9L4::3WB■02
	4000 K	1310 lm	

Order options

COLOUR TEMPERATURE

3000 K	5
4000 K	6
tunable white 2700–6500 K*	

*DALI-2 DT8; L6 light inset 2700–5000 K

CONTROL

DALI-2	
--------	--

LIGHT OPTIC COLOUR

chrome reflector	0
black reflector*	B

*not available for spot round, narrow medium round and wallwasher

MATERIAL COLOUR

● jet black RAL 9005	
----------------------	--

Options on request

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM*


*only for L24 light inset

LIGHT OPTIC

spot round	
narrow medium round	
medium round (UGR ≤ 19)	
medium square (UGR ≤ 10)	
flood round (UGR ≤ 19)	
flood square (UGR ≤ 19)	
wide flood round	
wide flood square	
rectangular	
wallwasher	
wallwasher floor	

LIGHT OPTIC COLOUR

gold reflector	
not available for L24 light inset	




L6 LIGHT INSET



WALL

6 × wallwasher

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20.3 W	3000 K	1770 lm	090-9 L 6 3 A B 0 0 1
15.1 W	4000 K	1890 lm	
	TW 2700–5000 K	1120 lm	090-9 L 6 D 3 A B 0 0 1




L10 LIGHT INSET



OFFICE UGR ≤ 19

10 × flood square

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
30 W	3000 K	2840 lm	050-3 2 1 1 3 8 R
22.2 W	4000 K	3060 lm	
	TW 2700–6500 K	2790 lm	050-3 2 1 1 D 3 8 R



L24 LIGHT INSET



OFFICE UGR ≤ 19

24 × medium square

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
21 W	3000 K	2350 lm	050-3 2 1 3 3 8 R
20.2 W	4000 K	2510 lm	
	TW 2700–6500 K	2800 lm	050-3 2 1 3 D 3 8 R

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black, reflector chrome



JUST 45/55

spotlight inset 45

Quickinfo


2700 K, 3000 K, 4000 K, CWD, TW
CRI ≥ 90, 2 SDCM

non DIM, DALI-2

L80 @ 50 000 h
JUST 45 up to 92 lm/W

L90 @ 50 000 h
JUST 55 up to 109 lm/W

Types



Colours



Light distributions

JUST 45



JUST 55




ARY rod




ARY shade



TULA



PAL



TW 1800–3000 K
or 2700–6500 K



CWD
2000–3000 K

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1

colour warm dim. 2000–3000 K*
 tunable white 1800–3000 K**
 tunable white 2700–6500 K**

*DALI-2 **DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR



○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

BEAM ANGLE JUST 45

medium 23°	M
flood 44°	F

BEAM ANGLE JUST 55

spot 16°	S
medium 28°	M
flood 37°	F



JUST 45



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
6.0 W super spot 8°	285 lm	050-013133V
10.9 W	960 lm	050-013133V
12 W CWD 2000–3000 K	430 lm	050-0131E3
11 W TW 1800–3000 K	555 lm	050-0131L3
11 W TW 2700–6500 K	683 lm	050-0131D3

JUST 55



SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
12.7 W	1330 lm	050-014333
19.1 W	1820 lm	050-014233

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42:3	007-1965188
JUST 55	50:3	007-1965598

OVAL LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42:3	007-1965880
JUST 55	50:3	007-1965890

SOFT LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42:3	007-1965980
JUST 55	50:3	007-1965990

WALLWASHER LENS

TYPE	Ø-H (mm)	ORDER CODE
JUST 45	42:3	007-1965780
JUST 55	50:3	007-1965790

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, lens flood 2700 K -5%, 4000 K +5%



MOVE IT 45 SYSTEM



reddot award 2019
winner



DESIGN
AWARD
2019


PIVOT

graphic light inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI $\geq$ 90, 3 SDCM
up to 123 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types




Colour




Light distribution



opal



tunable white
1800–4000 K



CRI $\geq$ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
tunable white 1800–4000 K*	L

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX


CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE


4000 K

MATERIAL COLOUR

○ traffic white RAL 9016





LIGHT INSET 25S




PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 1 3 1 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 1 3 1 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 1 3 1 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 1 3 1 5 :: 8 O
	3000 K	3160 lm		
32 W	2700 K	3570 lm	1810	0 5 0 - 1 3 1 6 :: 8 O
	3000 K	3790 lm		

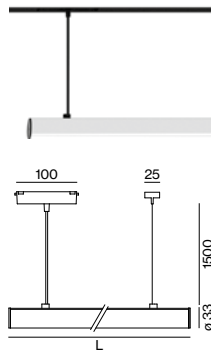


PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 2 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 2 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 2 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 2 5 :: 8 O
	3000 K	3160 lm		





LIGHT INSET 25/45



PIVOT


INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 1 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 1 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 1 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 1 5 :: 8 O
	3000 K	3160 lm		
32 W	2700 K	3570 lm	1810	0 5 0 - 0 3 1 6 :: 8 O
	3000 K	3790 lm		

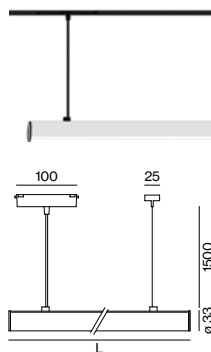

PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
10.6 W	2700 K	1190 lm	610	0 5 0 - 0 3 2 2 :: 8 O
	3000 K	1260 lm		
15.9 W	2700 K	1780 lm	910	0 5 0 - 0 3 2 3 :: 8 O
	3000 K	1890 lm		
21.2 W	2700 K	2380 lm	1210	0 5 0 - 0 3 2 4 :: 8 O
	3000 K	2530 lm		
26.4 W	2700 K	2970 lm	1510	0 5 0 - 0 3 2 5 :: 8 O
	3000 K	3160 lm		

LUMINOUS FLUX value calculated for
CRI ≥ 90, colour black

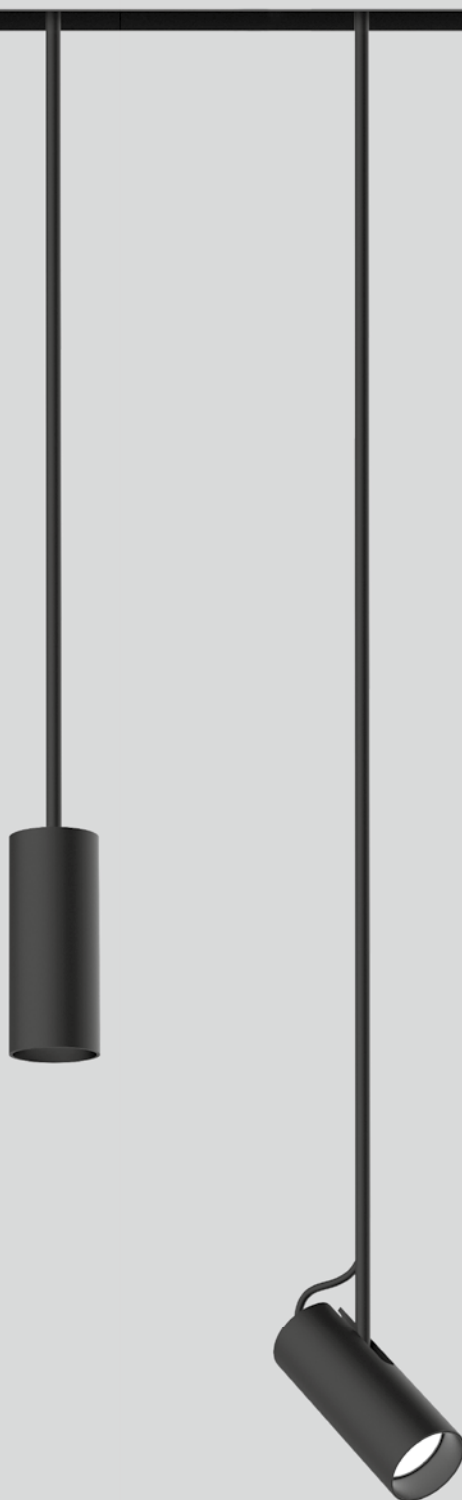

reddot winner 2020



DESIGN
AWARD
2020


ARY rod

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI $\geq$ 90, 3 SDCM
up to 84 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types



Colours



standard




xal.com/colours


Light distributions



med. flood



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

CABLE SUSPENSION

1500mm	5
2000mm with hook*	6

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200–4000 K*	

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

ACCESSORY COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE

medium 25°	M
flood 44°	F



ARY rod



DOWNLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	0 5 0 - 0 2 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	0 5 0 - 0 2 1 D 3

ARY rod adjustable



SPOTLIGHT


INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	0 5 0 - 0 3 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200–4000 K	284 lm	0 5 0 - 0 3 1 D 3



Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1



RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1





reddot winner 2020



DESIGN
AWARD
2020


ARY cable

decorative inset 25/25S/45


Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI ≥ 90, 3 SDCM
up to 84 lm/W
L90 @ 50 000 h
non DIM, DALI-2


Types




Colours




Light distributions



free positioning by
ring and hook



tunable white
2200 – 4000 K

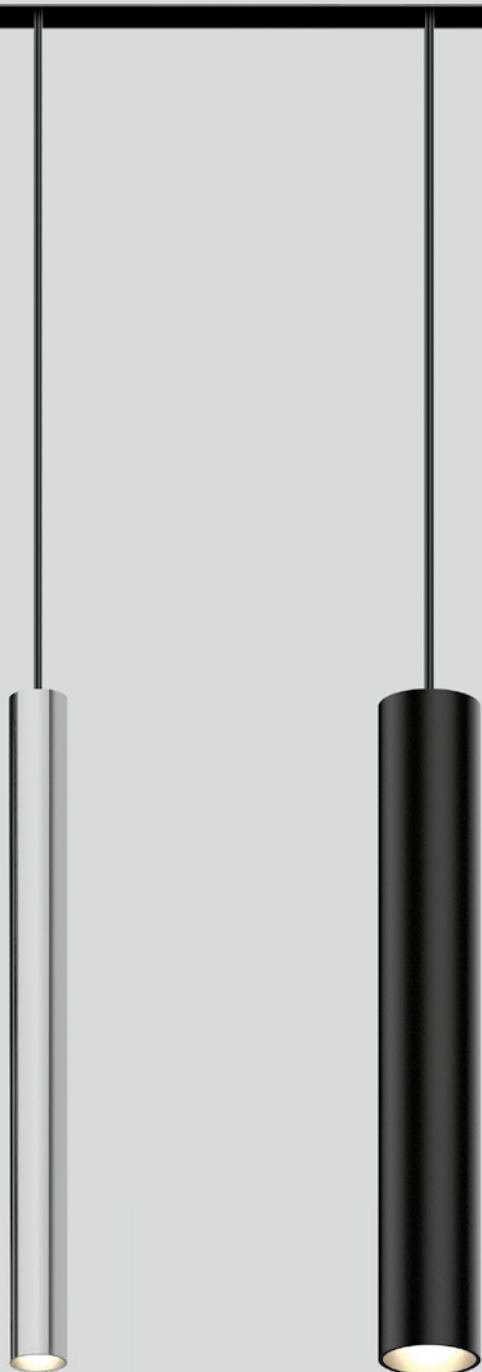


TULA

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI ≥ 90, 3 SDCM
up to 75 lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types




Colours



Light distributions



free positioning by
ring and hook



tunable white
2200 – 4000 K

Order options

HOUSING HEIGHT	L
300 mm	0
500 mm	1

CABLE SUSPENSION	⌘
1500 mm	7
2000 mm with hook*	8

*one ring included

COLOUR TEMPERATURE	⬢
2700 K	4
3000 K	5
tunable white 2200 – 4000 K*	

*DALI-2 DT8

CONTROL	⬢
non DIM	1
DALI-2	3


MATERIAL COLOUR	▣
⊙ chrome	4
○ traffic white RAL 9016	7
● jet black RAL 9005	8
⊙ special colours	X

ACCESSORY COLOUR	■
○ traffic white RAL 9016	7
● jet black RAL 9005	8


BEAM ANGLE	▲
medium 25°	M
flood 44°	F

Options on request

COLOUR TEMPERATURE
4000 K




TULA nano suspended




DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11W	2700 K	642lm	0 5 0 - L ⌘ 1 1 ⬢ ⬢ ▲
	3000 K	688lm	



TULA micro suspended



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	998lm	0 5 0 - L ⌘ 1 5 ⬢ ⬢ ▲
	3000 K	1048lm	
5.4 W	2200 – 4000 K	254lm	0 5 0 - L ⌘ 1 5 D 3 ⬢ ▲


Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1 ■

RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1 ■

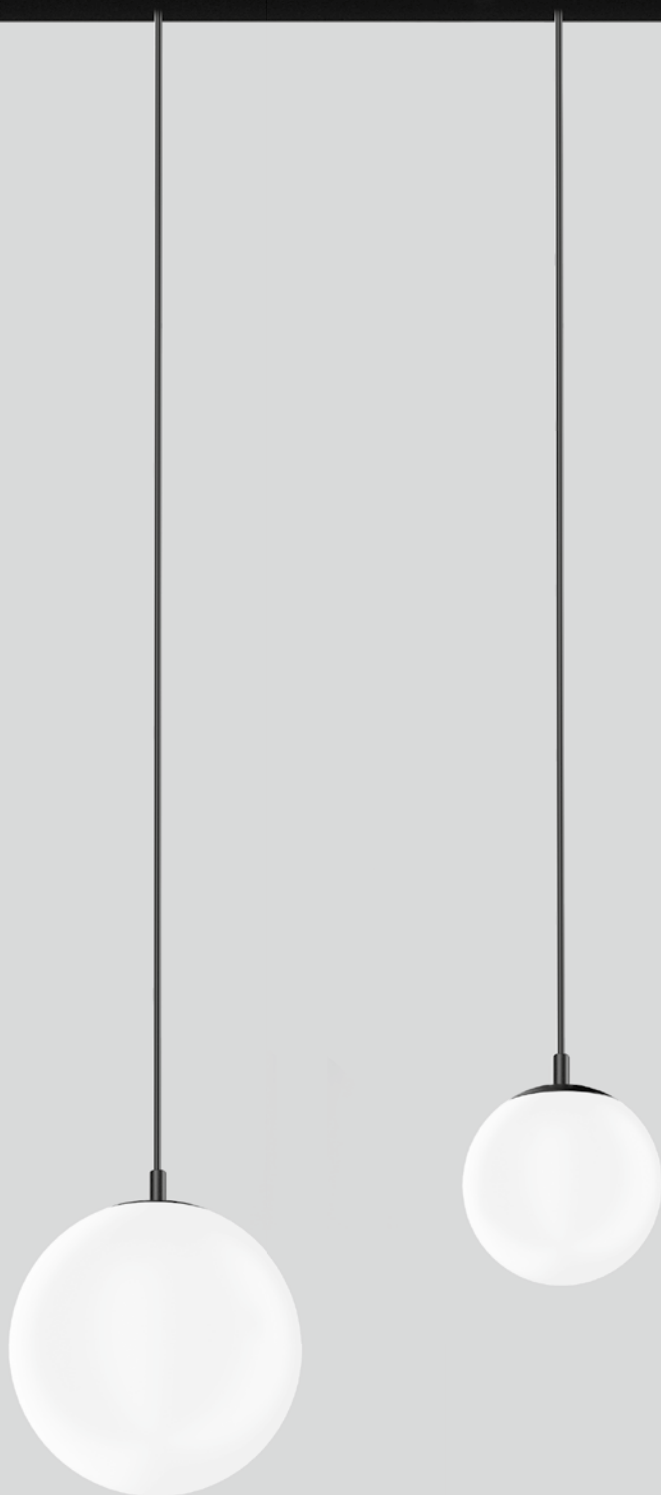


PAL

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K
CRI ≥ 90, 3 SDCM
up to 55 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



Colours



Light distribution



Order options


CABLE SUSPENSION	5
1500mm	5
2000mm with hook*	6
*one ring included	

COLOUR TEMPERATURE	4
2700 K	4
3000 K	5


CONTROL	1
non DIM	1
DALI-2	3

MATERIAL COLOUR	7
○ pure white RAL 9010	7
● jet black RAL 9005	8
● special colours	X

ACCESSORY COLOUR	7
○ pure white RAL 9010	7
● jet black RAL 9005	8



PAL suspended



DOWNLIGHT

INS. POWER	COLOUR TEMP.	LUM. FLUX	Ø (mm)	ORDER CODE
9.1W	2700 K	472lm	80	0 5 0 - 1 5 1 1 1
	3000 K	498lm		
9.1W	2700 K	472lm	120	0 5 0 - 1 5 1 3 1
	3000 K	498lm		


Mounting accessories

RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	0 5 0 - 1 5 1 0 1 1
MOVE IT 25/45	50-91	0 5 0 - 0 5 1 0 1 1

RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	0 5 0 - 0 5 1 0 2 1




INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI≥90, colour white, glass

**Quickinfo**

2700 K
CRI ≥ 95, 3 SDCM
up to 72 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types**Colours**

wästberg w201 Extra small pendant

Design by Claesson Koivisto Rune

Order options


CABLE SUSPENSION	
3000 mm	5
3000 mm with hook	6

COLOUR TEMPERATURE
2700 K

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
○ traffic white RAL 9016	7
● jet black RAL 9005	8

ACCESSORY COLOUR	
○ pure white RAL 9010	7
● jet black RAL 9005	8




w201 Extra small pendant s1



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	544lm	050-04814




w201 Extra small pendant s2



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	572lm	050-04824




w201 Extra small pendant s3



DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9W	2700 K	572lm	050-04834

Mounting accessories



RING track mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25 S	50-70	050-151011
MOVE IT 25/45	50-91	050-051011




RING ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
MOVE IT 25/25S/45	50-88	050-051021

INSET POWER in watts is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI≥90, colour white

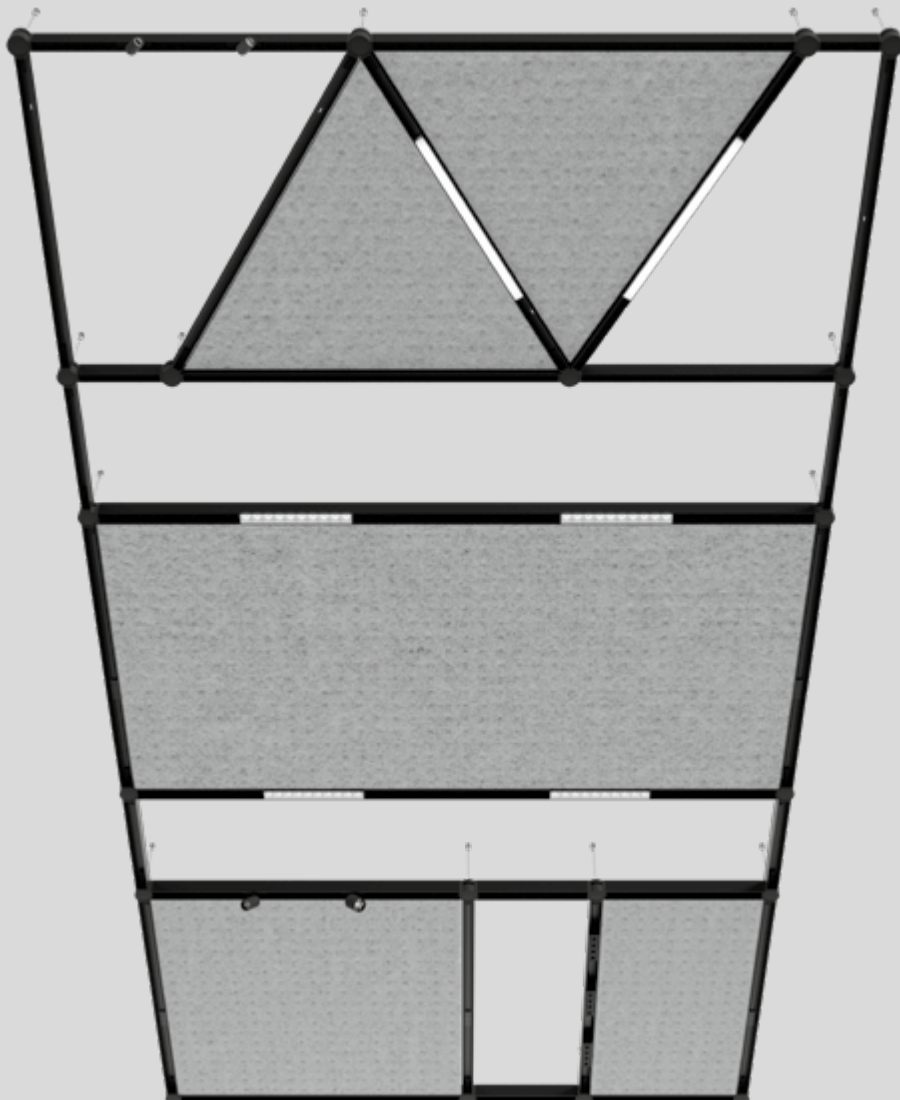

MOVE IT 25/45 system

acoustic elements

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; different versions: choice of square, rectangular or triangular design (only MOVE IT 25); high quality visual and tactile surface with embossed pattern; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; for installation in the MOVE IT 25/45 suspended system composed of node connectors and profiles; subsequent insertion in already installed MOVE IT suspended system possible; installation without tools

DE Akustikelement aus hochwertigem, selbsttragendem, recyceltem PET-Filz mit schallabsorbierenden Eigenschaften; unterschiedliche Varianten: Bauform wahlweise quadratisch, rechteckig oder dreieckig (nur MOVE IT 25); optisch und haptisch hochwertige Oberfläche mit Musterprägung; Absorption des Direktschalls und des von der Decke reflektierten Schalls; dadurch hohe akustische Performance; zum Einlegen in das MOVE IT 25/45 suspended system aus Knotenverbindern und Profilen; nachträgliches Einlegen in bereits installiertes MOVE IT suspended system möglich; werkzeuglose Montage

Quickinfo


PET felt

♻️ from recycled material


up to absorption class A

🔥 flame retardant version available


Types

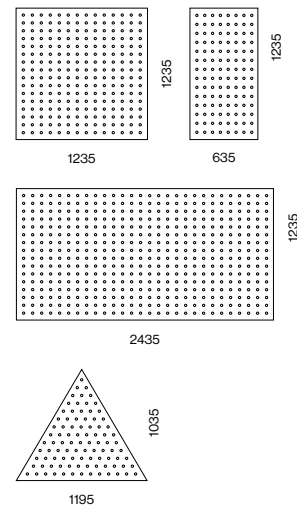

Acoustic colours



flat acoustic inlay 25 mm



embossed finish




quick and easy to retrofit



sensor inset available

Order options

ACOUSTIC COLOUR	
☐ white	W
☐ marble grey	D
☐ felt grey	G
☐ anthracite	B
☐ black	L
☐ limestone	S

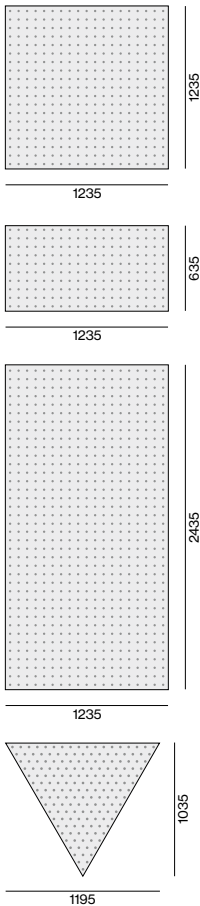

MOVE IT 25/ 45 acoustic suspended

 PET felt	<table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td colspan="5">$\alpha_w 1.00$</td></tr></table>	A	B	C	D	E	$\alpha_w 1.00$					1.30 NRC	1.32 SAA
A	B	C	D	E									
$\alpha_w 1.00$													


ACOUSTIC ELEMENT

TYPE	L·W·H (mm)	ORDER CODE
square grid inlay	1235·1235·25	050-231121
half grid inlay	635·1235·25	050-231221
double grid inlay	2435·1235·25	050-231321
triangle inlay*	1195·1035·25	050-231421

mounting only in MOVE IT 25/ 45 system with NODE connector + track 620 mm, 1220 mm or 2420 mm; *only available for MOVE IT 25 system


Acoustic data

Equivalent sound absorption area (A_{eq})							
TYPE	125	250	500	1000	2000	4000 Hz	
square grid inlay	0.73	1.47	1.73	2.20	2.67	2.77	
half grid inlay	0.57	0.83	0.93	1.27	1.57	1.57	
double grid inlay	1.30	2.73	3.20	4.10	4.97	5.23	
triangle inlay	0.33	0.57	0.73	0.97	1.27	1.33	

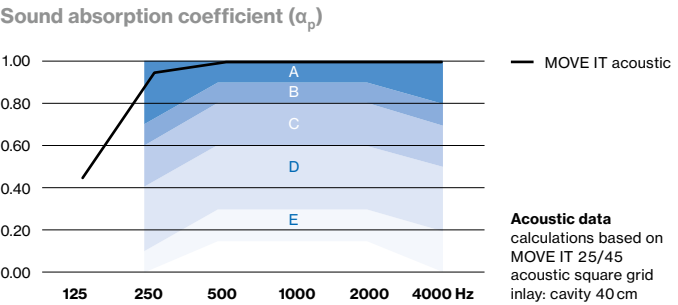


Configuration examples


MOVE IT 25 system

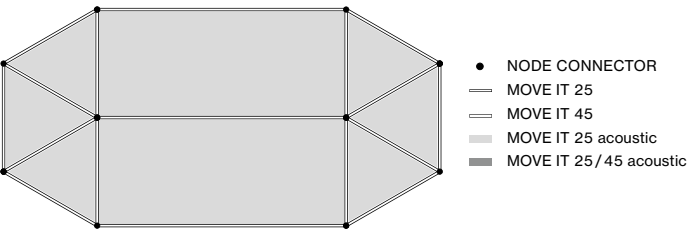

MOVE IT 45 system

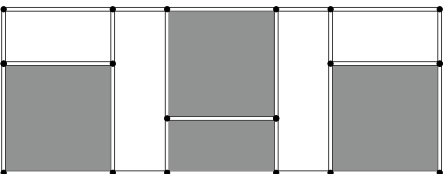

MOVE IT 25 / 45 system

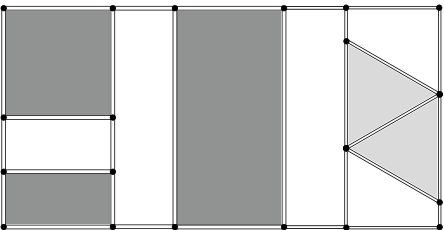

MOVE IT 25 system



MOVE IT 45 system