

# BETO direct / indirect power


free standing U-shape  
074-695461XR



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

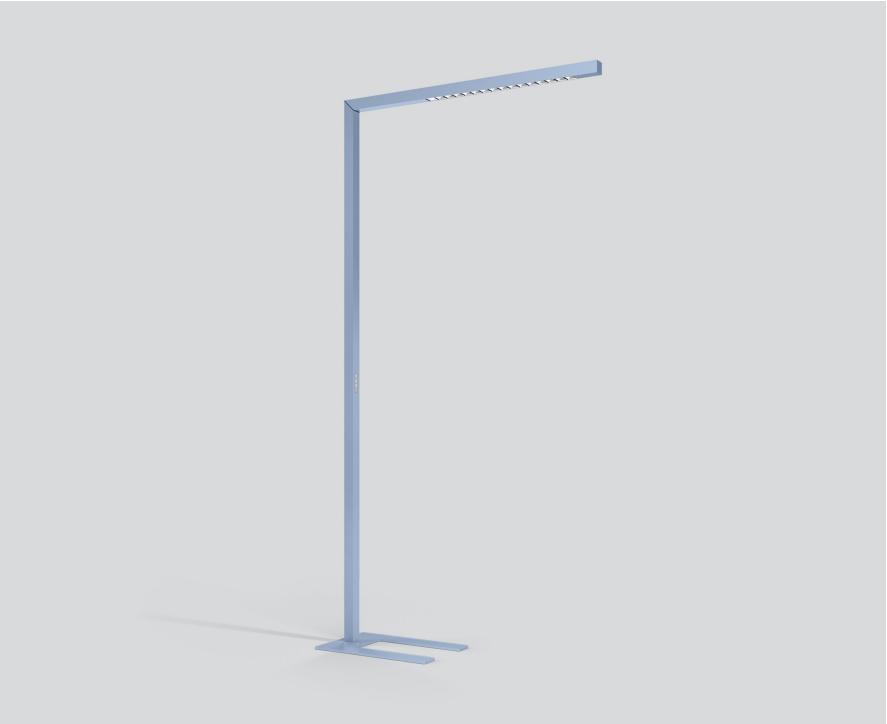

Free standing luminaire from extruded aluminium profile in angular design; extremely slim design (only 42 x 42 mm); square downpipe; pedestal with recess for table base (U-shape); surface special colours powder coated; direct/indirect illumination characteristic; direct light component with high gloss reflector + faceted design and asymmetric radiation characteristic; Reflector chrome; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination; UGR ≤ 13; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; including TOUCH DIM control for individual control of the brightness; incl. connection cable (3m) with safety plug; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Floor | Standing \_\_\_\_\_

special colours \_\_\_\_\_

Reflector chrome \_\_\_\_\_

IP20 \_\_\_\_\_

indirect 7550 lm | direct 2300 lm \_\_\_\_\_

total 9850 lm \_\_\_\_\_

## LED

4000 K \_\_\_\_\_

CRI ≥ 80 \_\_\_\_\_

L90 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

MR 0.72 | MDER 0.65 \_\_\_\_\_

## Optical

Reflector | asymmetric \_\_\_\_\_

UGR ≤ 13 \_\_\_\_\_

PstLM ≤ 1.0 <sup>1</sup> | SVM ≤ 0.4 <sup>1</sup> \_\_\_\_\_

## Electrical

touch DIM on pole \_\_\_\_\_

PC1 | 220-240 V \_\_\_\_\_

system 66 W \_\_\_\_\_

system 149 lm/W <sup>2</sup> \_\_\_\_\_

## Physical

U-shape \_\_\_\_\_

length 1055 mm | width 42 mm | height 2100 mm \_\_\_\_\_

11.7 kg \_\_\_\_\_

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions

