

MOVE IT 25 S system

trimless / surface / suspended


EN Thin extruded aluminium profile with 31 mm height and 28 mm width groove; optionally for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional with indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking

DE Niedriges Aluminiumstrangpressprofil mit 31 mm Höhe und 28 mm Fugenbreite; wahlweise für den randlosen Einbau in Gipskartondecken (Wand- oder Deckenmontage) mit 12,5 mm Deckenstärke; oder für Wand-/Deckenanbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung, inkl. schwarzer Einspeiseleitung); optional mit indirekter Lichtkomponente für zusätzliche Akzentuierung der Decke; für Lichtsysteme; linear, 90° Winkelverbinder oder 90° CURVE Element; mit integriertem Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfläche eloxiert bzw. pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze durch Magnethalterung + Verriegelung


Quickinfo

3000 K
CRI ≥ 90, 2 SDCM
up to 118 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



connector



corner curve


Colours



standard



xal.com/colours



custom cut on building site

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request


CONNECTOR

T-connector
X-connector


INSTALLATION TRACK

acoustic soft ceilings









MOVE IT 25 S trimless

DALI-2 | 48V | TRACK max. 6,67 A | pending | CB pending

INSTALLATION TRACK

L (mm)		ORDER CODE
617	channel	050-72120◆8
1217	channel	050-72140◆8
2417	channel	050-72180◆8
3622	channel	050-72190◆8
cust. cut	channel (non DIM)	E83131····8
cust. cut	channel (DALI-2)	E83141····8
672x645	channel corner* 90°	050-72110◆8
661x661	channel corner* ceiling to wall 90°	050-72111◆8

*incl. electrical connector set

Accessories



END CAPS


TYPE	ORDER CODE
end caps (pair)	050-7210008



BLIND COVER

L (mm)	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000····8B

blind cover can be shortened as desired



CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-2032◆10
mechanical linear connector (pair)	050-2011110



POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5 mm²	050-2020110
DALI-2 2×2,5 + 2×0,5 mm²	050-2020130

cable length 500 mm

Electrical accessories

see following pages

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005	8
◒ traffic white 9016 / jet black 9005	P
◒ gold dust 260-M / jet black 9005	G
special colours*	X

*inside always in black

MATERIAL COLOUR ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR CABLE SUSPENSION

chrome	0
black	8

Options on request


CONNECTOR

- T-connector
- X-connector



MOVE IT 25 S surface / suspended

DALI-2 | 48V | TRACK max. 6,67 A | pending | CB pending




INSTALLATION TRACK / BLIND COVER

L (mm)		ORDER CODE
620	channel	050-73120
1220	channel	050-73140
2420	channel	050-73180
3625	channel	050-73190
cust. cut	channel (non DIM)	E83151····
cust. cut	channel (DALI-2)	E83161····
637x610	channel corner* 90°	050-73110
666x666	channel corner* ceiling to wall 90°	050-73111

*incl. electrical connector set



1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000···· 8B



CURVE CONNECTOR

TYPE	ORDER CODE
mechanical & electrical R 300 mm	050-731303
mechanical R 300 mm	050-731311


Accessories

END CAPS




TYPE	ORDER CODE
end caps (pair)	050-731000

CONNECTOR SET




TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical linear connector surface	050-2011410
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT



TYPE	L (mm)	ORDER CODE
non DIM 2×2,5 mm²	2000	050-2022110
DALI-2 2×2,5 + 2×0,5 mm²	2000	050-2022130
non DIM 2×2,5 mm²	4000	050-2024110
DALI-2 2×2,5 + 2×0,5 mm²	4000	050-2024130

CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL



TYPE	L (mm)	ORDER CODE
ceiling fastener	67	050-204111
cable suspension*	1500	005-215211
canopy		005-231171
wall mounting accessory		050-2044118

*use every 1200 mm

Electrical accessories

see following pages

Order options

COLOUR TEMPERATURE

3000 K	

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005	8
◒ traffic white 9016 / jet black 9005	P
◒ gold dust 260-M / jet black 9005	G
special colours*	X

*inside always in black

MATERIAL COLOUR ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR CABLE SUSPENSION

chrome	0
black	8

Options on request

COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE


2700 K
4000 K
tunable white 2700 – 6500 K*


*DALI-2 DT8

CONNECTOR


T-connector
X-connector














MOVE IT 25 S suspended indirect

CRI ≥ 90 · DALI-2 · 48 V · TRACK max. 6,67 A · pending · CB pending

INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-741250
1220	15 W	1810 lm	050-741450
2420	33 W	3890 lm	050-741850
3625	51 W	6000 lm	050-741950
637x610 corner*	13.1 W	1550 lm	050-741100

incl. chrome cable suspension for L = 2420 / 3625 mm
no custom cut on building side; *incl. electrical connector set

1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 · · · · 8B

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-731000

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm²	2000	050-2022110
DALI-2 2 × 2,5 + 2 × 0,5 mm²	2000	050-2022130
non DIM 2 × 2,5 mm²	4000	050-2024110
DALI-2 2 × 2,5 + 2 × 0,5 mm²	4000	050-2024130

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

*use every 1200 mm

Electrical accessories

see following pages

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white / black



MOVE IT 25 system

trimless / surface / suspended


EN Extruded aluminium profile with 28 mm width groove; for trimless installation in plasterboard ceilings (wall or ceiling mounting) with 12.5 mm ceiling thickness; or for wall-/ ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools, incl. black feed); optional indirect light component for additional accentuation of the ceiling; for lighting systems; linear, 90° angle connectors or 90° CURVE segment; node connectors, up to 6 profile connection options; with power track profile for take off of supply voltage and DALI signal; surf. anod. or powder coated; insets can be installed flexibly and without tools by means of magnetic holders + locking; sound absorbing accessories available

DE Aluminiumstrangpressprofil mit 28 mm Fugenbreite; für randlosen Einbau in Gipskartondecken (Wand- oder Deckenmontage) mit 12,5 mm Deckenstärke; oder für Wand-/ Deckenanbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung, inkl. schwarzer Einspeiseleitung); optional indirekte Lichtkomponente für zusätzliche Akzentuierung der Decke; für Lichtsysteme; linear, 90° Winkelverbinder oder 90° CURVE Element; Knotenverbinder, bis zu 6 Profilanschlussmöglichkeiten; mit Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfl. elox. bzw. pulverbeschichtet; flexible und werkzeuglose Montage der Einsätze durch Magnethalterung + Verriegelung; schallabsorbierendes Zubehör erhältlich

Quickinfo

3000 K
CRI ≥ 90, 2 SDCM
up to 118 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



connectors



node



corner



curve


Colours



standard



xal.com/colours



custom cut on building site



acoustic elements

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005


Options on request


CONNECTOR


T-connector
X-connector


INSTALLATION TRACK

acoustic soft ceilings









MOVE IT 25 trimless

DALI-2 | 48V | TRACK max. 6,67 A | pending | CB pending

INSTALLATION TRACK

L (mm)		ORDER CODE
617	channel	050-72020◆8
1217	channel	050-72040◆8
2417	channel	050-72080◆8
3622	channel	050-72090◆8
cust. cut	channel (non DIM)	E83031····8
cust. cut	channel (DALI-2)	E83041····8
672x645	channel corner* 90°	050-72010◆8
661x661	channel corner* ceiling to wall 90°	050-72011◆8

*incl. electrical connector set

Accessories



END CAPS


TYPE	ORDER CODE
end caps (pair)	050-7200008



BLIND COVER

L (mm)	ORDER CODE
1217	050-7004008
2417	050-7008008
3622	050-7009008
custom cut	E83000····8B


blind cover can be shortened as desired





CONNECTOR SET

TYPE	ORDER CODE
linear connector (non DIM, DALI-2)	050-2031130
linear connector flexible	050-20321◆0
mechanical linear connector (pair)	050-2011110



POWER FEEDER UNIT

TYPE	ORDER CODE
non DIM 2×2,5 mm²	050-2020110
DALI-2 2×2,5 + 2×0,5 mm²	050-2020130

cable length 500 mm

Electrical accessories

see following pages

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR INSTALLATION TRACK

● jet black RAL 9005	8
◒ traffic white 9016 / jet black 9005	P
◒ gold dust 260-M / jet black 9005	G
special colours*	X

*inside always in black

MATERIAL COLOUR NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

MATERIAL COLOUR NODE / END CAP

● jet black RAL 9005	8
◒ traffic white 9016 / jet black 9005	P
special colours	X

MATERIAL COLOUR ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8


MATERIAL COLOUR CABLE SUSPENSION

chrome	0
black	8

NODE CONNECTOR MOUNTING TYPE


surface*	1
1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

*only for L/T/X



MOVE IT 25 surface / suspended

DALI-2 | 48V | TRACK max. 6,67 A | pending | CB pending




INSTALLATION TRACK / BLIND COVER

L (mm)		ORDER CODE
620	channel	050-73020
1220	channel	050-73040
2420	channel	050-73080
3625	channel	050-73090
cust. cut	channel (non DIM)	E83051
cust. cut	channel (DALI-2)	E83061
637x610	channel corner* 90°	050-73010
666x666	channel corner* ceiling to wall 90°	050-73011

*incl. electrical connector set



1217	blind cover	050-7004008
2417	blind cover	050-7008008
3622	blind cover	050-7009008
cust. cut	blind cover	E83000 · · · · 8B




CURVE CONNECTOR

TYPE	ORDER CODE
mechanical & electrical R 300 mm	050-730303
mechanical R 300 mm	050-730311

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000




NODE CONNECTOR

TYPE	ORDER CODE
NODE surface mounted	050-203333
NODE surface mounted incl. feeder	050-202243
NODE cable suspension 1500 mm	050-20331
NODE cable susp. 1500 mm incl. feeder	050-20222
NODE end cap* incl. electrical connector	050-730010


*order for every node connection (channel to node) 1 end cap

CONNECTOR SET




TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical linear connector surface	050-2011410
mechanical & electrical linear connector	050-2031230

POWER FEEDER UNIT



TYPE	L (mm)	ORDER CODE
non DIM 2×2,5 mm²	2000	050-2022110
DALI-2 2×2,5 + 2×0,5 mm²	2000	050-2022130
non DIM 2×2,5 mm²	4000	050-2024110
DALI-2 2×2,5 + 2×0,5 mm²	4000	050-2024130



CEILING FASTENER / CABLE SUSPENSION / CANOPY / WALL

TYPE	L (mm)	ORDER CODE
ceiling fastener	67	050-204111
cable suspension*	1500	005-215211
canopy		005-231171
wall mounting accessory		050-2044118

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages

Order options

COLOUR TEMPERATURE

3000 K	

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR INSTALLATION TRACK

● jet black RAL 9005	8
◪ traffic white 9016 / jet black 9005	P
◪ gold dust 260-M / jet black 9005	G
special colours*	X

*inside always in black

MATERIAL COLOUR NODE CONNECTOR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

MATERIAL COLOUR NODE / END CAP

● jet black RAL 9005	8
◪ traffic white 9016 / jet black 9005	P
special colours	X

MATERIAL COLOUR ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR CABLE SUSPENSION

chrome	0
black	8

NODE CONNECTOR MOUNTING TYPE

1500 mm cable susp. chrome	3
1500 mm cable susp. black	4

Options on request


COLOUR RENDERING INDEX


CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

2700 K
4000 K
tunable white 2700 – 6500 K*


*DALI-2 DT8




















MOVE IT 25 suspended indirect

CRI ≥ 90 | DALI-2 | 48 V | TRACK max. 6,67 A | pending | CB pending

INSTALLATION TRACK INDIRECT

L (mm)	SYSTEM POWER	LUMINOUS FLUX	ORDER CODE
620	6.2 W	648 lm	050-740254
1220	15 W	1810 lm	050-740454
2420	33 W	3890 lm	050-740854
3625	51 W	6000 lm	050-740954
637x610 corner*	13.1 W	1550 lm	050-741054

incl. chrome cable suspension for L = 2420 / 3625 mm
no custom cut on building side; *incl. electrical connector set

1217	blind cover	050-700400 8
2417	blind cover	050-700800 8
3622	blind cover	050-700900 8
cust. cut	blind cover	E83000 · · · · 8B

Accessories

END CAPS

TYPE	ORDER CODE
end caps (pair)	050-730000

NODE CONNECTOR

TYPE	ORDER CODE
NODE cable suspension 1500 mm	050-203314
NODE cable susp. 1500 mm incl. feeder	050-202224
NODE end cap* incl. electrical connector	050-730010

*order for every node connection (channel to node) 1 end cap

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear conn. incl. 1500 mm cable susp.	050-201131
mechanical & electrical linear connector	050-203123

POWER FEEDER UNIT

TYPE	L (mm)	ORDER CODE
non DIM 2 × 2,5 mm²	2000	050-202211
DALI-2 2 × 2,5 + 2 × 0,5 mm²	2000	050-202213
non DIM 2 × 2,5 mm²	4000	050-202411
DALI-2 2 × 2,5 + 2 × 0,5 mm²	4000	050-202413

CABLE SUSPENSION / CANOPY

TYPE	L (mm)	ORDER CODE
cable suspension*	1500	005-215211
canopy		005-231171

*use every 1200 mm

Electrical accessories

see following pages

Acoustic elements

see following pages

LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white / black

Order options

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8


Electrical accessories



POWER SUPPLY INTRACK supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L·W·H (mm)	ORDER CODE
100 W ▣ PC II	η 92 %	intrack	403·26·46	050-2071038
150 W ▣ PC II	η 92 %	intrack	403·26·46	050-2071138


incl. feeder cable 2000 mm; ENEC approved; DALI-2 SELV device integrated



POWER SUPPLY SURFACE supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L·W·H (mm)	ORDER CODE
60 W ⏚ PC I	η 90 %	surface	305·144·54	050-20551
100 W ⏚ PC I	η 92 %	surface	455·104·40	050-20554
150 W ⏚ PC I	η 92 %	surface	455·104·40	050-20552
250 W ⏚ PC I	η 93 %	surface	455·104·40	050-20555
320 W ⏚ PC I	η 95 %	surface	305·144·54	050-20553


ENEC approved; DALI-2 SELV device integrated



POWER SUPPLY EXTERNAL supply 220-240 V AC, 48 V, 50-60 Hz

TYPE	EFFICIENCY	MOUNTING	L·W·H (mm)	ORDER CODE
60 W ▣ PC II	η 90 %	external	163·43·32	002-62133
100 W ▣ PC II	η 92 %	external	350·30·18	002-62134
150 W ▣ PC II	η 92 %	external	350·30·18	002-62135
250 W ▣ PC II	η 93 %	external	400·40·22	002-62139
320 W ▣ PC II	η 95 %	external	252·90·44	002-62132


ENEC approved



POWER SUPPLY BASIC 48 V

220–240 V | 50–60 Hz | ▣ PC II | Lifetime @ 120 W, 45° ambient temp.
cascadable max. 3 devices


TYPE	EFFICIENCY / LIFETIME	W·H·D (mm)	ORDER CODE
160 W	η 94.5 % / > 100.000 h	72·90·63	005-6520210



DIN RAIL POWER SUPPLY PRO 48 V


220–240 V | 50–60 Hz | ⏚ PC I | MTBF @ 55° ambient temperature
cascadable max. 5 devices (240 W) or 3 devices (480 W)

TYPE	EFFICIENCY / MTBF	W·H·D (mm)	ORDER CODE
240 W	η 92 % / > 400.000 h	60·125·100	005-6220110
480 W	η 93 % / > 350.000 h	120·125·100	005-6220210



DIN RAIL DALI SELV DEVICE


TYPE	W·H·D (mm)	ORDER CODE
control unit	36·86·58	005-6620030



DALI-2 SELV DEVICE


TYPE	L·W·H (mm)	ORDER CODE
control unit	213·37·26	050-2061130

necessary to create DALI-2 SELV signal; DALI power supply integrated



DALI SENSOR

TYPE	L·W·H (mm)	ORDER CODE
ESSENTIAL sensor (brightness & presence)	125·28·45	050-2063178



WIRELESS TO DALI-2 CONTROL DEVICE


TYPE	L·W·H (mm)	ORDER CODE
Casambi	111·25·45	050-2065230

DALI-2 SELV device required



WIRELESS TO DALI-2 REPEATER

TYPE	L·W·H (mm)	ORDER CODE
Casambi	111·25·45	050-2066230




MIDDLE FEED

TYPE	ORDER CODE
DALI-2 2×2,5 + 2×0,5 mm²	050-2038130

cable length 2000 mm

Blique by Nobis
Stockholm, SE –
by Wingårdhs

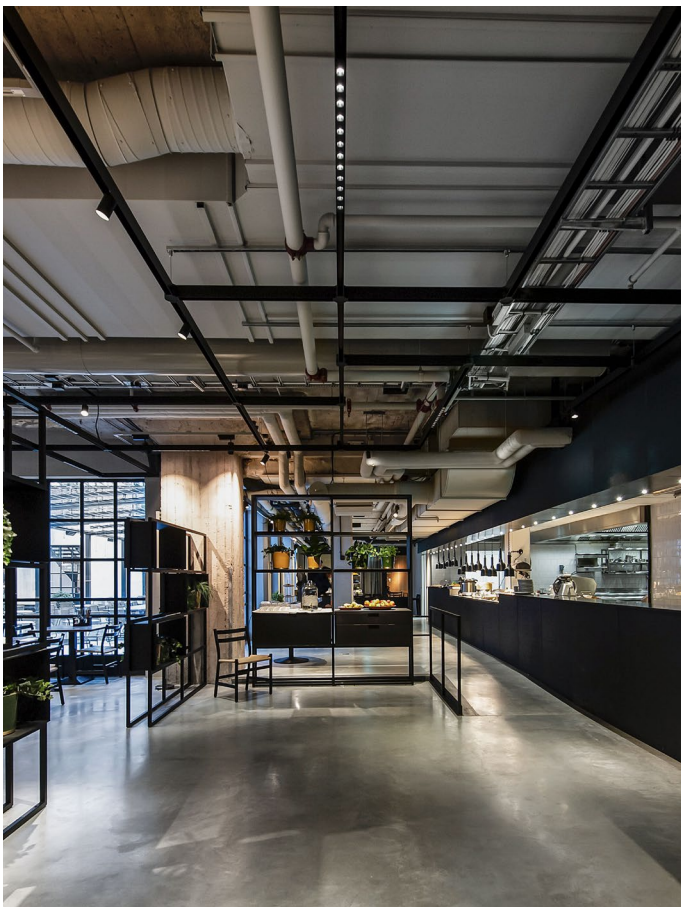





JUST

spotlight inset 25/25S

Quickinfo


2700K, 3000K, 4000K, TW, CWD
CRI≥90, 2 SDCM
non DIM, DALI-2

L95 @ 50000h
JUST 32 focus up to 78lm/W

L80 @ 50000h
JUST 45 up to 92lm/W

L90 @ 50000h
JUST 55 up to 109lm/W

Types



Colours



standard



xal.com/colours

Light distributions

JUST 32 focus



focus

JUST 45




super spot | med. | flood


JUST 55



spot | med. | flood



TW 1800–3000K
or 2700–6500K



CWD
2000–3000K

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1
colour warm dim. 2000–3000 K*	
tunable white 1800–3000 K**	
tunable white 2700–6500 K**	

*DALI-2 **DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

BEAM ANGLE JUST 45

medium 23°	M
flood 44°	F

BEAM ANGLE JUST 55

spot 16°	S
medium 23°	M
flood 37°	F


Options on request

OPTICAL ACCESSORIES

elliptical sculpture foil
snoot
colour filter (red, blue, green, etc.)

only for JUST 32 focus






JUST 32 focus 17–43°

CRI ≥90 · DALI 1 ADDR. · 48 V · pending · CB pending

SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
5.5 W	411 lm	050-0111






JUST 45

CRI ≥90 · DALI 1 ADDR. · 48 V · pending · CB pending

SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
6.0 W super spot 8°	285 lm	050-0131 3 V
10.9 W	960 lm	050-0131
10.7 W CWD 2000–3000 K	560 lm	050-0131E3
11 W TW 1800–3000 K	555 lm	050-0131L3
11 W TW 2700–6500 K	683 lm	050-0131D3





JUST 55

CRI ≥90 · DALI 1 ADDR. · 48 V · pending · CB pending

SPOTLIGHT

INSET POWER	LUMINOUS FLUX	ORDER CODE
12.7 W	1330 lm	050-0143 3
19.1 W	1820 lm	050-0142 3

Optical accessories

HONEYCOMB LOUVER

TYPE	Ø·H (mm)	ORDER CODE
JUST 32 focus	30·4	007-1965178
JUST 45	42·3	007-1965188
JUST 55	50·3	007-1965598

OVAL LENS

TYPE	Ø·H (mm)	ORDER CODE
JUST 45	42·3	007-1965880
JUST 55	50·3	007-1965890


SOFT LENS

TYPE	Ø·H (mm)	ORDER CODE
JUST 45	42·3	007-1965980
JUST 55	50·3	007-1965990

WALLWASHER LENS

TYPE	Ø·H (mm)	ORDER CODE
JUST 45	42·3	007-1965780
JUST 55	50·3	007-1965790

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for 3000 K, CRI ≥ 90, colour white, lens flood
2700 K -5 %, 4000 K +5%

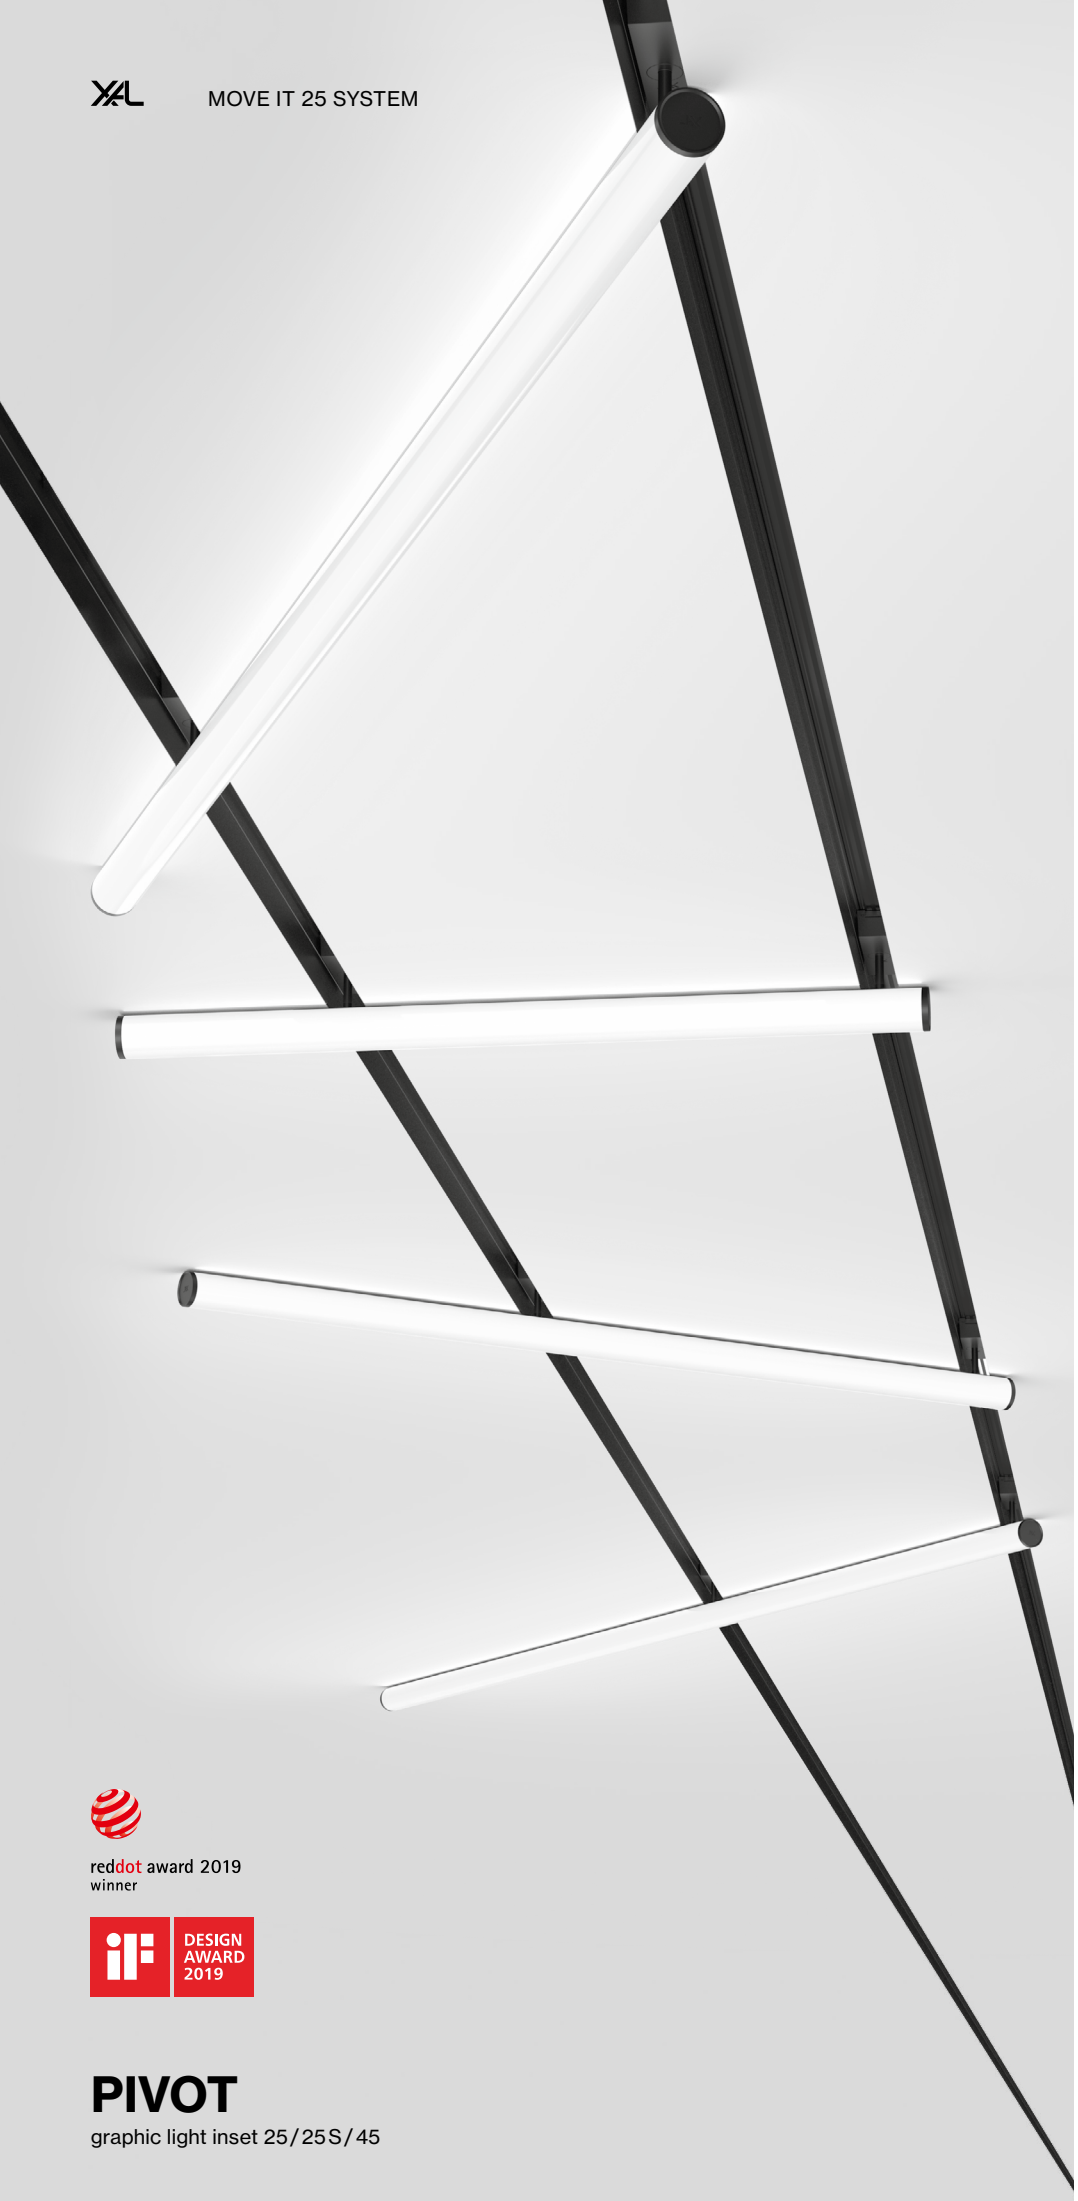

reddot award 2019
winner

DESIGN AWARD 2019


PIVOT

graphic light inset 25/25S/45

Quickinfo

2700 K, 3000 K, TW
CRI ≥ 90, 3 SDCM
up to 123 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types




Colour


Light distribution



opal



tunable white
2700 – 6500 K



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
tunable white 2700 – 6500 K*	D

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request

COLOUR RENDERING INDEX


CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

4000 K

MATERIAL COLOUR

○ traffic white RAL 9016




LIGHT INSET 25 S

CRI ≥ 80 · 1 ADDR. · 48 V

PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 1 3 1 2 :: ≑ 8 O
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 1 3 1 3 :: ≑ 8 O
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 1 3 1 4 :: ≑ 8 O
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 1 3 1 5 :: ≑ 8 O
	3000 K	3350 lm		
27.7 W	2700 K	4020 lm	1810	0 5 0 - 1 3 1 6 :: ≑ 8 O
	3000 K	4020 lm		

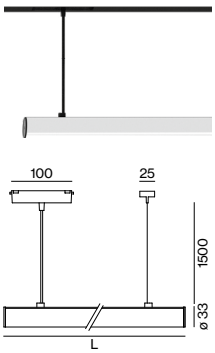

CRI ≥ 80 · 1 ADDR. · 48 V

PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 0 3 2 2 :: ≑ 8 O
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 0 3 2 3 :: ≑ 8 O
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 0 3 2 4 :: ≑ 8 O
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 0 3 2 5 :: ≑ 8 O
	3000 K	3350 lm		




LIGHT INSET 25 / 45

CRI ≥ 80 · 1 ADDR. · 48 V

PIVOT

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 0 3 1 2 :: ≑ 8 O
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 0 3 1 3 :: ≑ 8 O
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 0 3 1 4 :: ≑ 8 O
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 0 3 1 5 :: ≑ 8 O
	3000 K	3350 lm		
27.7 W	2700 K	4020 lm	1810	0 5 0 - 0 3 1 6 :: ≑ 8 O
	3000 K	4020 lm		

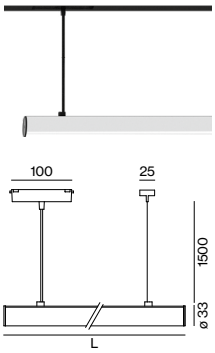

CRI ≥ 80 · 1 ADDR. · 48 V

PIVOT SUSPENDED

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
9.6 W	2700 K	1340 lm	610	0 5 0 - 0 3 2 2 :: ≑ 8 O
	3000 K	1340 lm		
13.8 W	2700 K	2010 lm	910	0 5 0 - 0 3 2 3 :: ≑ 8 O
	3000 K	2010 lm		
18.5 W	2700 K	2680 lm	1210	0 5 0 - 0 3 2 4 :: ≑ 8 O
	3000 K	2680 lm		
23.1 W	2700 K	3350 lm	1510	0 5 0 - 0 3 2 5 :: ≑ 8 O
	3000 K	3350 lm		

LUMINOUS FLUX value calculated for CRI ≥ 90, colour black



DESIGN AWARD 2020

FLEXTRACK

system extension 25 / 25 S


EN Thin extruded aluminium profile with 31 mm height and 28 mm width groove; with integrated power track profile for take off of supply voltage and DALI signal; surface anodised or powder coated; for installation in two MOVE IT 25 or 25 S profiles; profile can be installed and moved without tools by means of magnetic holders + locking; mount 360° rotatable and freely slidable on one end; light insets can be installed flexibly and without tools by means of magnetic holders+locking

DE Niedriges Aluminiumstrangpressprofil mit 31 mm Höhe und 28 mm Fugenbreite; mit integriertem Stromschienenprofil für Abnahme von Versorgungsspannung und DALI Signal; Oberfläche eloxiert bzw. pulverbeschichtet; zum Einsetzen in zwei MOVE IT 25 bzw. MOVE IT 25 S Profile; Profil mittels Magnethalter+Verriegelung werkzeuglos einsetz- und verschiebbar; Halterung 360° drehbar und an einem Ende beliebig verschiebbar; flexible und werkzeuglose Montage der Lichteinsätze durch Magnethalterung + Verriegelung

Quickinfo

non DIM, DALI-2

Types



Colours



standard



xal.com/colours

Order options

CONTROL

non DIM	1
DALI-2	3


MATERIAL COLOUR

jet black RAL 9005	8
traffic white 9016 / jet black 9005	P
gold dust 260-M / jet black 9005	G
special colours*	X

*inside always in black

MOVE IT 25 S

DALI-2 | 48V




FLEXTRACK

L (mm)	ORDER CODE
620	050-75120
920	050-75130
1220	050-75140
1520	050-75150
1820	050-75160


MOVE IT 25

DALI-2 | 48V



FLEXTRACK

L (mm)	ORDER CODE
620	050-75020
920	050-75030
1220	050-75040
1520	050-75050
1820	050-75060

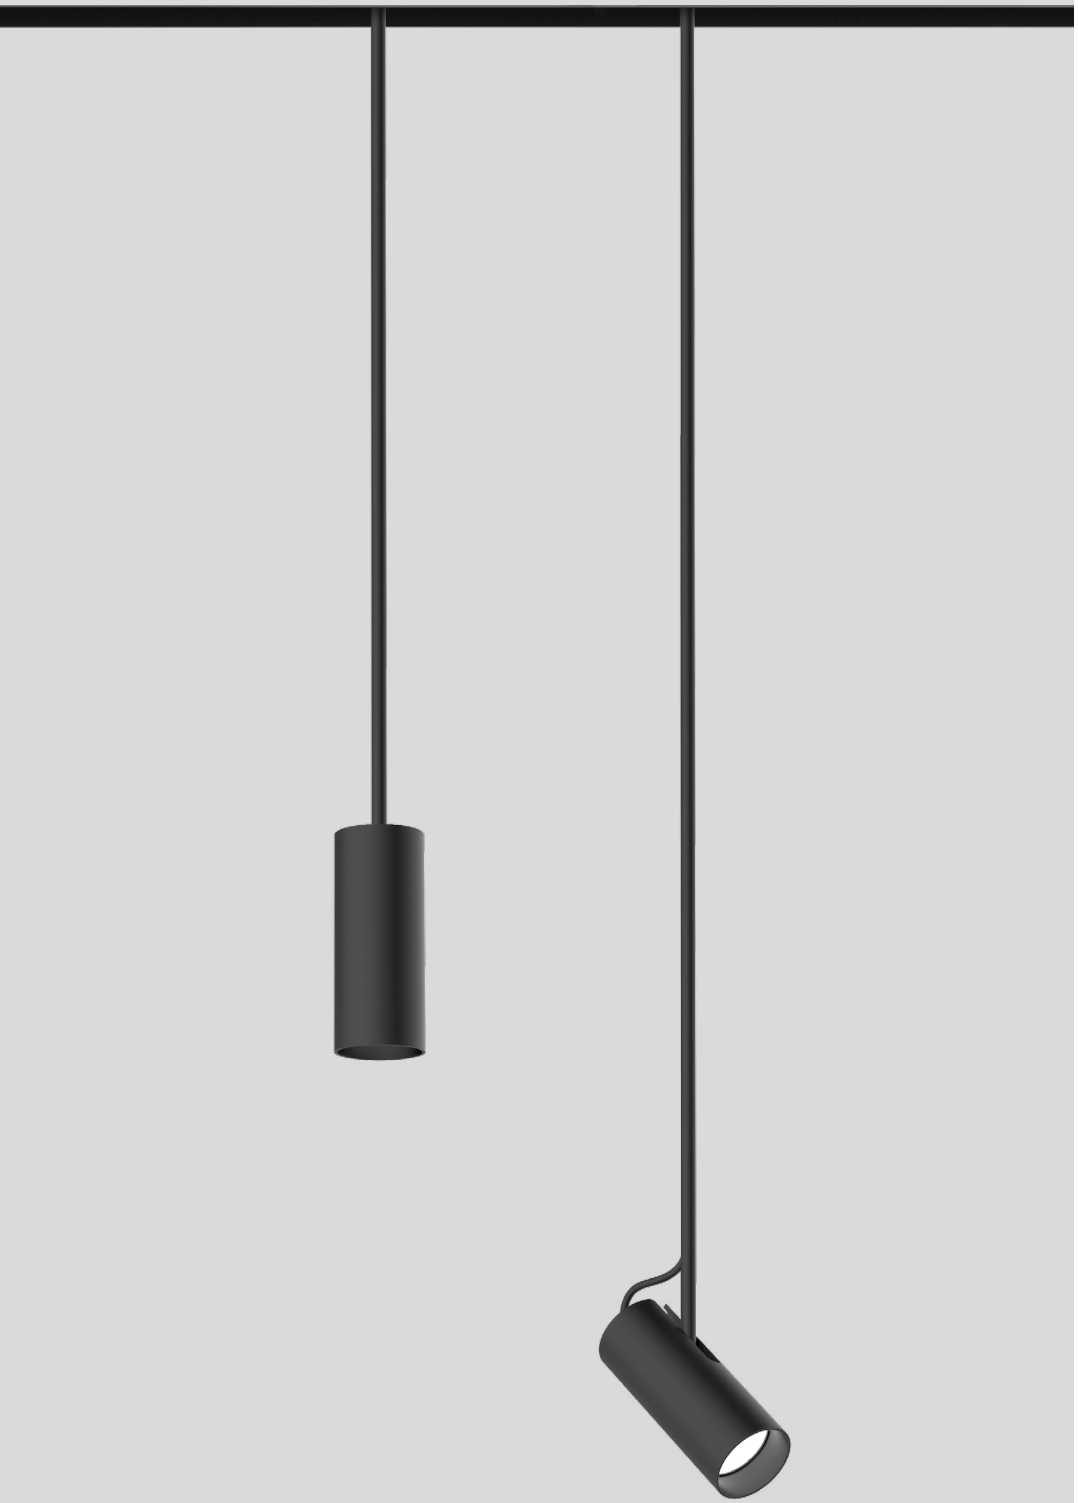

reddot winner 2020

DESIGN AWARD 2020


ARY rod

decorative inset 25/25S/45

Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI ≥ 90, 3 SDCM
up to 84 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types



Colours




standard xal.com/colours


Light distributions



med. flood



free positioning by ring and hook



tunable white 2200 – 4000 K

Order options

CABLE SUSPENSION

1500 mm	5
2000 mm with hook*	6

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200 – 4000 K*	

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR


○ traffic white RAL 9016	7
● jet black RAL 9005	8
special colours	X

ACCESSORY COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE

medium 25°	M
flood 44°	F




ARY rod

CRI ≥ 90 · 1 ADDR. · 48 V · X-PERT

DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 ♁ 21 ⁘ ◪ ▲
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200 – 4000 K	284 lm	050-0 ♁ 21D3 ◪ ▲




ARY rod adjustable

265° · 90° · CRI ≥ 90 · 1 ADDR. · 48 V · X-PERT

SPOTLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	050-0 ♁ 31 ⁘ ◪ ▲
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200 – 4000 K	284 lm	050-0 ♁ 31D3 ◪ ▲

Mounting accessories



RING track mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 S	50·70	050-151011 ■
MOVE IT 25/45	50·91	050-051011 ■



RING ceiling mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25/25S/45	50·88	050-051021 ■

Optical accessories

HONEYCOMB LOUVER AND LENSES

TYPE	Ø·H (mm)	ORDER CODE
honeycomb louver	42·3	007-1965188
oval lens	42·3	007-1965880
soft lens	42·3	007-1965980
wallwasher lens	42·3	007-1965780


LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, lens flood




Quickinfo

2700 K, 3000 K, 4000 K, TW
CRI ≥ 90, 3 SDCM
up to 3510 lm | 86 lm/W
L80 @ 50 000 h
DALI-2

Types





Colours



standard xal.com/colours



shade



disc

Light distributions




med. flood

reddot winner 2024


DESIGN AWARD 2024

ARY cable

decorative inset 25 / 25 S / 45



free positioning by ring and hook



tunable white 2200 – 4000 K

Order options

CABLE SUSPENSION

1500 mm	5
2000 mm with hook*	6

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5
4000 K	6
tunable white 2200 – 4000 K*	

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

traffic white RAL 9016	7
jet black RAL 9005	8
special colours	X

ACCESSORY COLOUR

traffic white RAL 9016	7
jet black RAL 9005	8

BEAM ANGLE


medium 25°	M
flood 44°	F

SHADE COLOUR

velvet beige RAL 085 80 10	C
madeira brown RAL 050 40 40	T
kingfisher grey RAL 230 60 10	L
woodpecker olive RAL 10 50 20	G
signal white RAL 9003	W
signal black RAL 9004	B

DISC COLOUR

brushed aluminium	A
brushed brass	E




ARY cable

CRI ≥ 90 · 1 ADDR. · 48 V · X-PERT

DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	1050 lm	0 5 0 - 0 1 1
	3000 K	1100 lm	
	4000 K	1180 lm	
5.4 W TW	2200 – 4000 K	284 lm	0 5 0 - 0 1 1 D 3

Mounting accessories



RING track mounted


TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 S	50·70	0 5 0 - 1 5 1 0 1 1
MOVE IT 25 / 45	50·91	0 5 0 - 0 5 1 0 1 1



RING ceiling mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 / 25 S / 45	50·88	0 5 0 - 0 5 1 0 2 1


Optical accessories



SHADE

TYPE	Ø·H (mm)	ORDER CODE
cone 300	300·188	0 4 9 - 5 9 3 3 1 1
cone 400	400·253	0 4 9 - 5 9 3 4 1 1
cone 500	500·318	0 4 9 - 5 9 3 5 1 1

only for one lamp



DISC


TYPE	Ø·H (mm)	ORDER CODE
disc 250	250·3	0 4 9 - 5 9 5 2 1 1
disc 350	350·3	0 4 9 - 5 9 5 3 1 1

only for one lamp

HONEYCOMB LOUVER AND LENSES

TYPE	Ø·H (mm)	ORDER CODE
honeycomb louver	42·3	0 0 7 - 1 9 6 5 1 8 8
oval lens	42·3	0 0 7 - 1 9 6 5 8 8 0
soft lens	42·3	0 0 7 - 1 9 6 5 9 8 0
wallwasher lens	42·3	0 0 7 - 1 9 6 5 7 8 0

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, lens flood

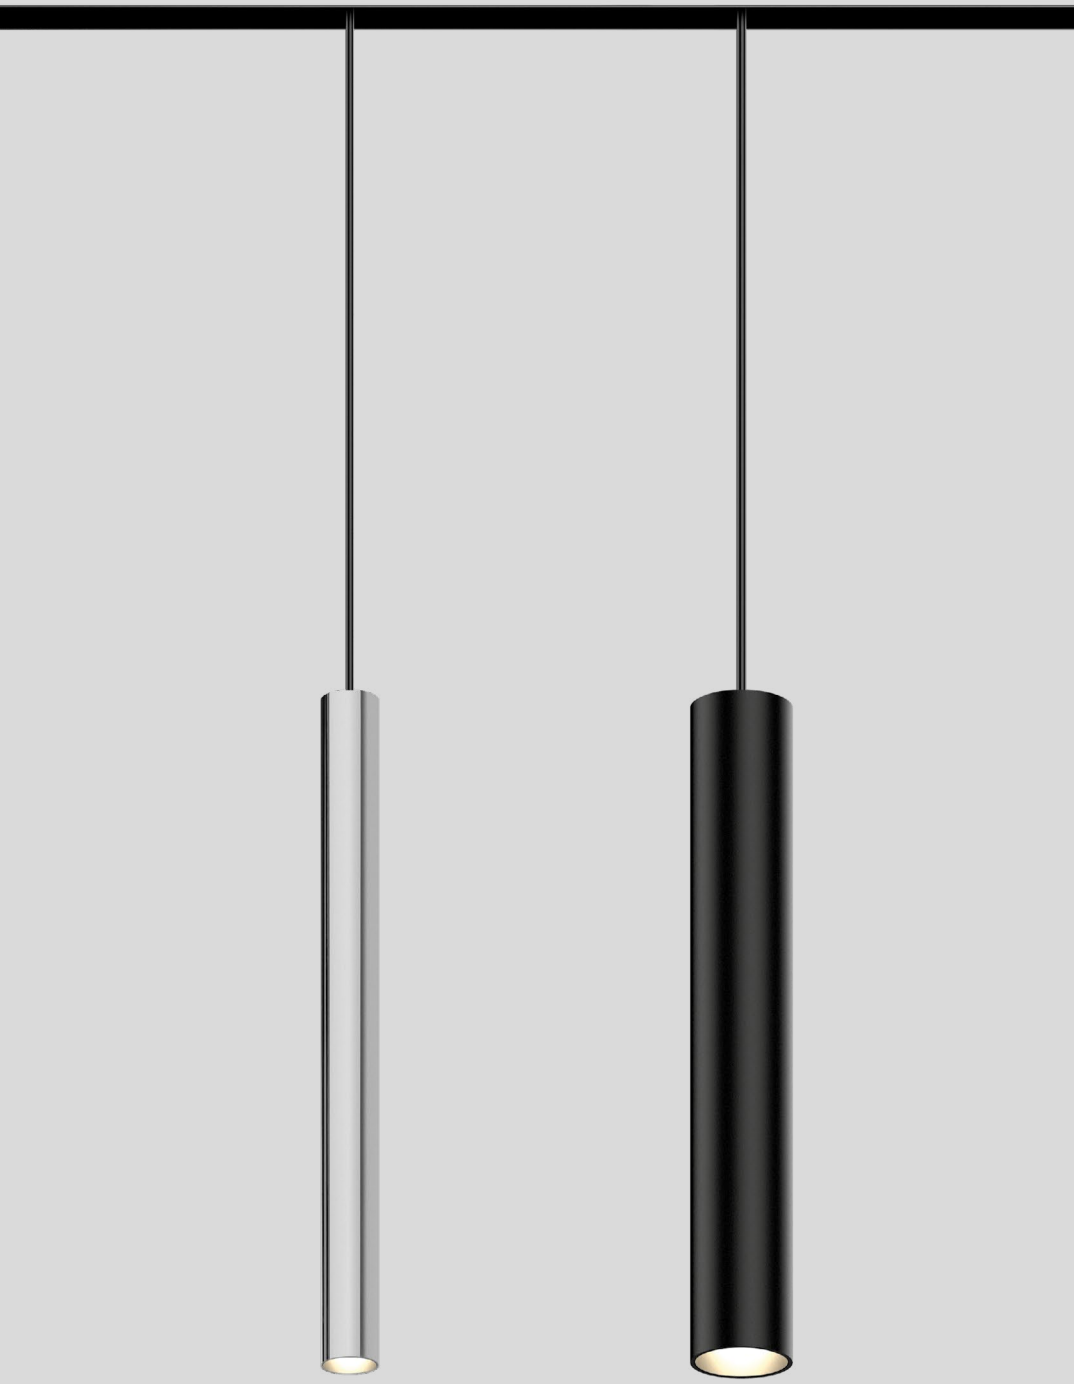


TULA

decorative inset 25 / 25 S / 45

Quickinfo

2700 K, 3000 K, TW
CRI ≥ 90, 3 SDCM
up to 75 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



Colours




standard xal.com/colours


Light distributions



med. flood



free positioning by ring and hook



tunable white 2200 – 4000 K

Order options

HOUSING HEIGHT L

300 mm	0
500 mm	1

CABLE SUSPENSION

1500 mm	7
2000 mm with hook*	8

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5
tunable white 2200 – 4000 K*	

*DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

chrome	4
traffic white RAL 9016	7
jet black RAL 9005	8
special colours	X

ACCESSORY COLOUR

traffic white RAL 9016	7
jet black RAL 9005	8


BEAM ANGLE ▲

medium 24°/25°	M
flood 30°/44°	F

Options on request

COLOUR TEMPERATURE

4000 K




TULA nano suspended

CRI ≥ 90 · DALI 1 ADDR. · 48 V

DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
11 W	2700 K	642 lm	0 5 0 - L ♁ 1 1 ⁘ ⇳ ◪ ▲
	3000 K	688 lm	




TULA micro suspended

CRI ≥ 90 · DALI 1 ADDR. · 48 V

DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14 W	2700 K	998 lm	0 5 0 - L ♁ 1 5 ⁘ ⇳ ◪ ▲
	3000 K	1048 lm	
5.4 W	2200 – 4000 K	254 lm	0 5 0 - L ♁ 1 5 D 3 ◪ ▲

Mounting accessories



RING track mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 S	50·70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25 / 45	50·91	0 5 0 - 0 5 1 0 1 1 ■



RING ceiling mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 / 25 S / 45	50·88	0 5 0 - 0 5 1 0 2 1 ■

Optical accessories

HONEYCOMB LOUVER AND LENSES

TYPE	Ø·H (mm)	ORDER CODE
TULA micro | honeycomb louver	42·3	0 0 7 - 1 9 6 5 1 8 8
TULA micro | oval lens	42·3	0 0 7 - 1 9 6 5 8 8 0
TULA micro | soft lens	42·3	0 0 7 - 1 9 6 5 9 8 0
TULA micro | wallwasher lens	42·3	0 0 7 - 1 9 6 5 7 8 0

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, lens flood




PAL

decorative inset 25 / 25 S / 45

Quickinfo

2700 K, 3000 K
CRI ≥ 90, 3 SDCM
up to 55 lm/W
L80 @ 50 000 h
non DIM, DALI-2

Types



Colours



standard xal.com/colours

Light distribution



opal

Order options

CABLE SUSPENSION

1500 mm	5
2000 mm with hook*	6

*one ring included

COLOUR TEMPERATURE

2700 K	4
3000 K	5

CONTROL


non DIM	1
DALI-2	3

MATERIAL COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8
special colours	X

ACCESSORY COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8




PAL suspended

CRI ≥ 90 · 1 ADDR. · 48 V

DOWNLIGHT

INS. POWER	COLOUR TEMP.	LUM. FLUX	Ø (mm)	ORDER CODE
9.1 W	2700 K	472 lm	80	0 5 0 - 1 ♁ 1 1 ⁘ ⇳ ◪
	3000 K	498 lm		
9.1 W	2700 K	472 lm	120	0 5 0 - 1 ♁ 1 3 ⁘ ⇳ ◪
	3000 K	498 lm		

Mounting accessories



RING track mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 S	50·70	0 5 0 - 1 5 1 0 1 1 ■
MOVE IT 25 / 45	50·91	0 5 0 - 0 5 1 0 1 1 ■



RING ceiling mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 / 25 S / 45	50·88	0 5 0 - 0 5 1 0 2 1 ■

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, glass




WASTBERG+
CONE suspended

Design by Claesson Koivisto Rune

Quickinfo

2700 K
CRI ≥ 95, 3 SDCM
up to 72 lm / W
L90 @ 50 000 h
non DIM, DALI-2

Types



Colours



Order options

CABLE SUSPENSION

3000 mm	5
3000 mm with hook	6

COLOUR TEMPERATURE

2700 K	

CONTROL


non DIM	1
DALI-2	3

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
◌ aluminium raw	0

ACCESSORY COLOUR

○ pure white RAL 9010	7
● jet black RAL 9005	8




CONE suspended W151XS1

CRI ≥ 90 · 1 ADDR. · 48 V · HOT PLUG SAFE

DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9 W	2700 K	544 lm	050-041401




CONE suspended W151XS2

CRI ≥ 90 · 1 ADDR. · 48 V · HOT PLUG SAFE

DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9 W	2700 K	572 lm	050-042402




CONE suspended W151XS3

CRI ≥ 90 · 1 ADDR. · 48 V · HOT PLUG SAFE

DOWNLIGHT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
7.9 W	2700 K	572 lm	050-043403

Mounting accessories



RING track mounted


TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25 S	50·70	050-151011
MOVE IT 25/45	50·91	050-051011



RING ceiling mounted

TYPE	Ø·H (mm)	ORDER CODE
MOVE IT 25/25S/45	50·88	050-051021

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour white

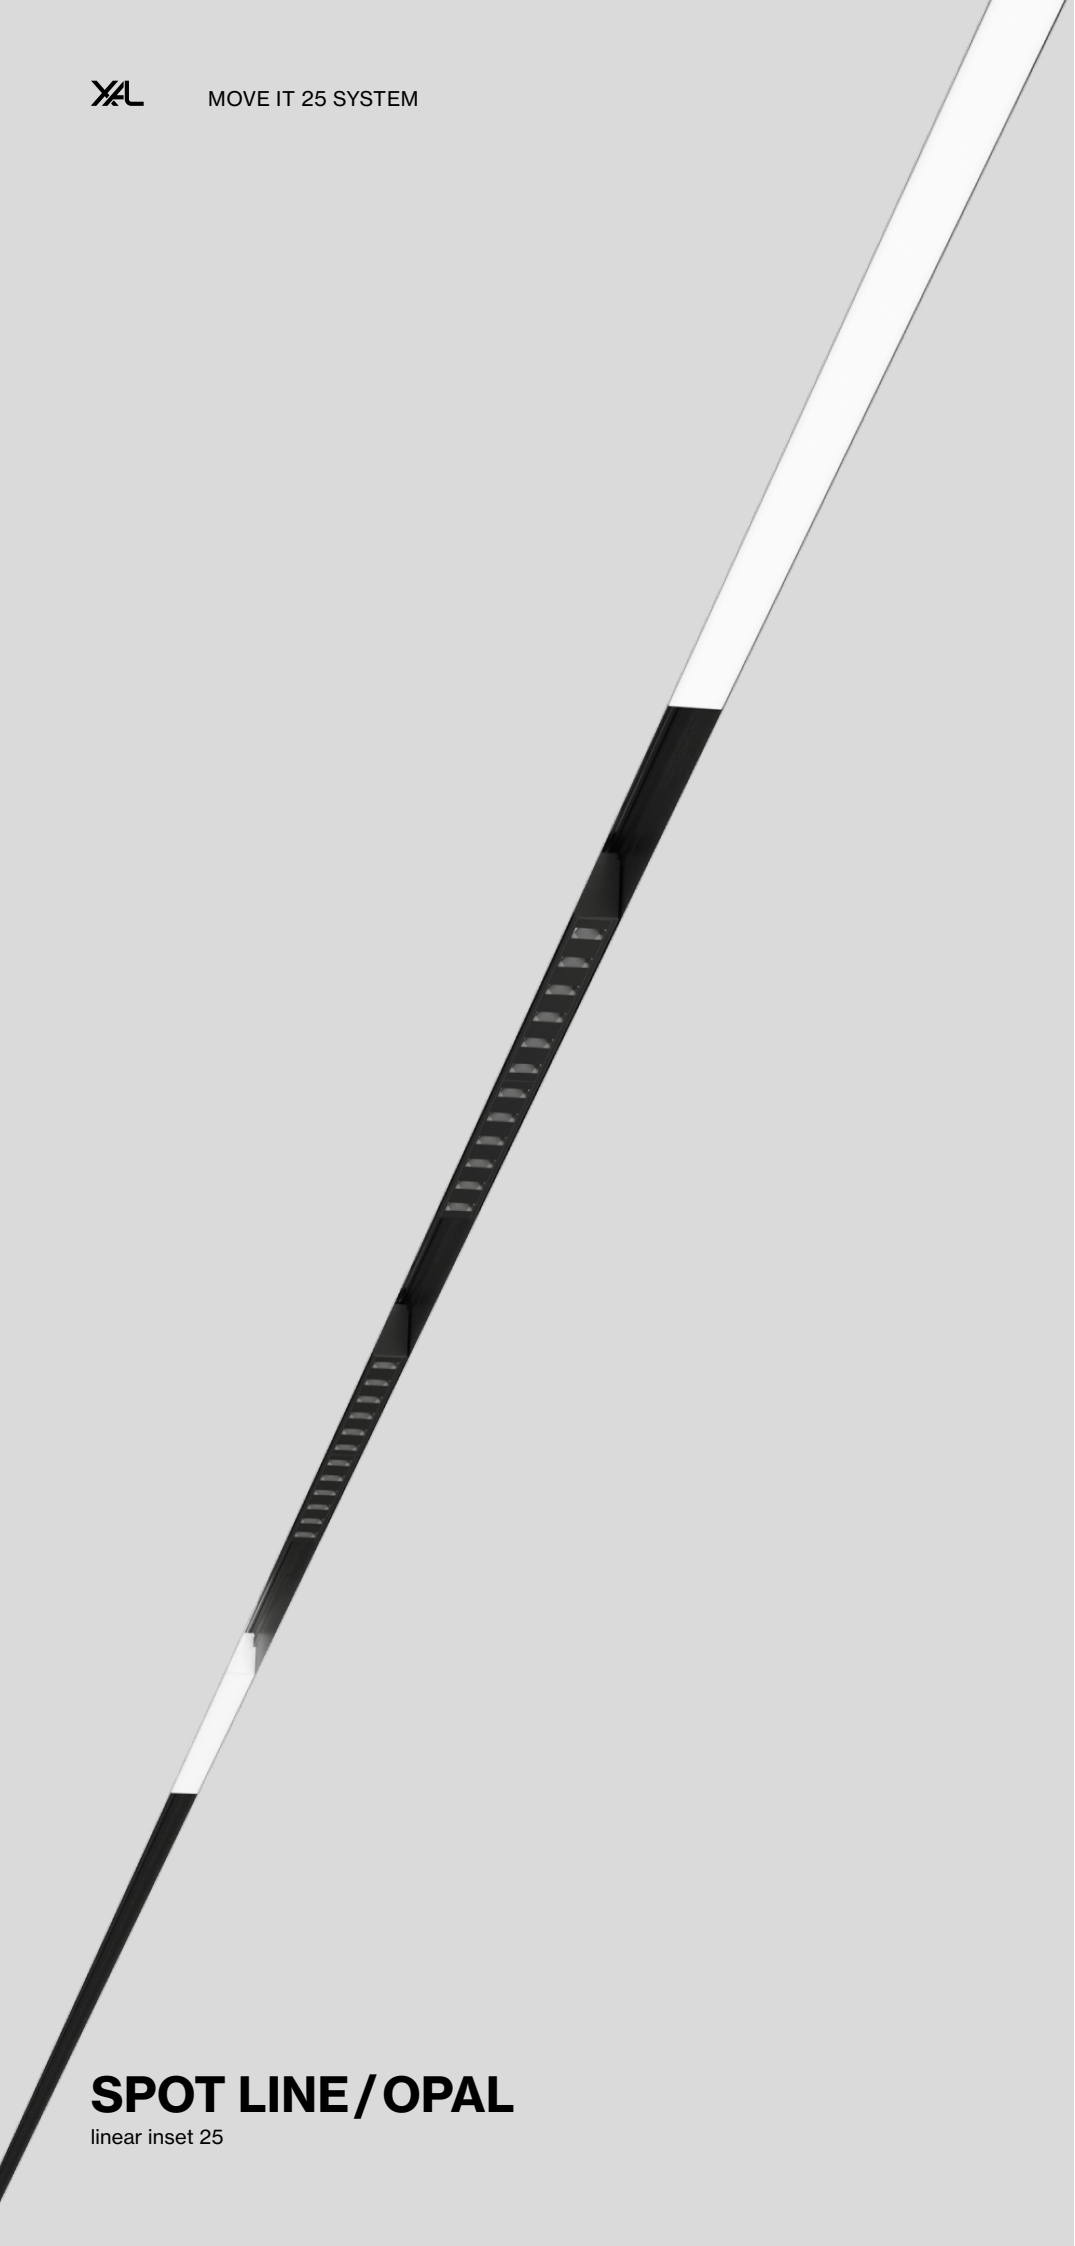

SPOT LINE / OPAL

linear inset 25


Quickinfo

2700 K, 3000 K, TW (opal)
CRI ≥ 90, 3 SDCM
SPOT LINE up to 82 lm/W
OPAL up to 101 lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types

MOVE IT 25


SPOT LINE




OPAL




Light distributions





tunable white
1800 – 4000 K



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5
tunable white 1800–4000 K*	L

*only available for opal high performance inset | DALI-2 DT8

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request


COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

4000 K






LIGHT INSET 25

UGR ≤ 16 | CRI ≥ 90 | DALI 1 ADDR. | 48 V | pending | CB pending

SPOT LINE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
4.5 W	2700 K	336 lm	155	0 5 0 - 0 2 2 0 :: ≎ 8 M
	3000 K	363 lm		
8.9 W	2700 K	673 lm	305	0 5 0 - 0 2 2 1 :: ≎ 8 M
	3000 K	726 lm		
17.9 W	2700 K	1350 lm	605	0 5 0 - 0 2 2 2 :: ≎ 8 M
	3000 K	1450 lm		






CRI ≥ 90 | DALI 1 ADDR. | 48 V | pending | CB pending

OPAL HIGH PERFORMANCE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	451 lm	305	0 5 0 - 0 2 1 1 :: ≎ 8 H
	3000 K	484 lm		
10.6 W	2700 K	902 lm	605	0 5 0 - 0 2 1 2 :: ≎ 8 H
	3000 K	968 lm		
21.3 W	2700 K	1800 lm	1205	0 5 0 - 0 2 1 4 :: ≎ 8 H
	3000 K	1940 lm		
43 W	2700 K	3610 lm	2405	0 5 0 - 0 2 1 8 :: ≎ 8 H
	3000 K	3870 lm		





LIGHT INSET 25 S


CRI ≥ 90 | DALI 1 ADDR. | 48 V | pending | CB pending

OPAL HIGH PERFORMANCE

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	402 lm	305	0 5 0 - 1 2 1 1 :: ≎ 8 H
	3000 K	432 lm		
10.6 W	2700 K	805 lm	605	0 5 0 - 1 2 1 2 :: ≎ 8 H
	3000 K	864 lm		
21.3 W	2700 K	1610 lm	1205	0 5 0 - 1 2 1 4 :: ≎ 8 H
	3000 K	1730 lm		
43 W	2700 K	3220 lm	2405	0 5 0 - 1 2 1 8 :: ≎ 8 H
	3000 K	3460 lm		

canyon solution for MOVE IT 25

Light distribution



spot line

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black



WALLWASHER

linear inset 25/25S


Quickinfo

2700 K, 3000 K
CRI ≥ 90, 3 SDCM
WALLWASHER up to 81 lm/W
WW flush up to 82 lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types

MOVE IT 25

WALLWASHER




WALLWASHER flush



MOVE IT 25 S


WALLWASHER flush



Light distribution



wall
washer



CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request


COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM


COLOUR TEMPERATURE

4000 K

Light distributions




wallwasher



wallwasher flush

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black






LIGHT INSET 25

CRI ≥90 · DALI 1ADDR. · 48V · pending · CB pending

WALLWASHER

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
13 W	2700 K	983 lm	450	050-0232 :: 38A
	3000 K	1050 lm		





CRI ≥90 · DALI 1ADDR. · 48V · pending · CB pending

WALLWASHER FLUSH

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	050-0211 :: ◆ 8A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	050-0212 :: ◆ 8A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	050-0214 :: ◆ 8A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	050-0218 :: ◆ 8A
	3000 K	3630 lm		


Optical accessories

ANTI-GLARE GRID

TYPE	L·W (mm)	ORDER CODE
WALLWASHER FLUSH	303·25	050-0230918

cluster solution to create anti-glare grid for all lengths






LIGHT INSET 25 S

CRI ≥90 · DALI 1ADDR. · 48V · pending · CB pending

WALLWASHER FLUSH

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.6 W	2700 K	415 lm	305	050-1211 :: ◆ 8A
	3000 K	454 lm		
11.2 W	2700 K	829 lm	605	050-1212 :: ◆ 8A
	3000 K	908 lm		
22.3 W	2700 K	1660 lm	1205	050-1214 :: ◆ 8A
	3000 K	1820 lm		
45 W	2700 K	3320 lm	2405	050-1218 :: ◆ 8A
	3000 K	3630 lm		

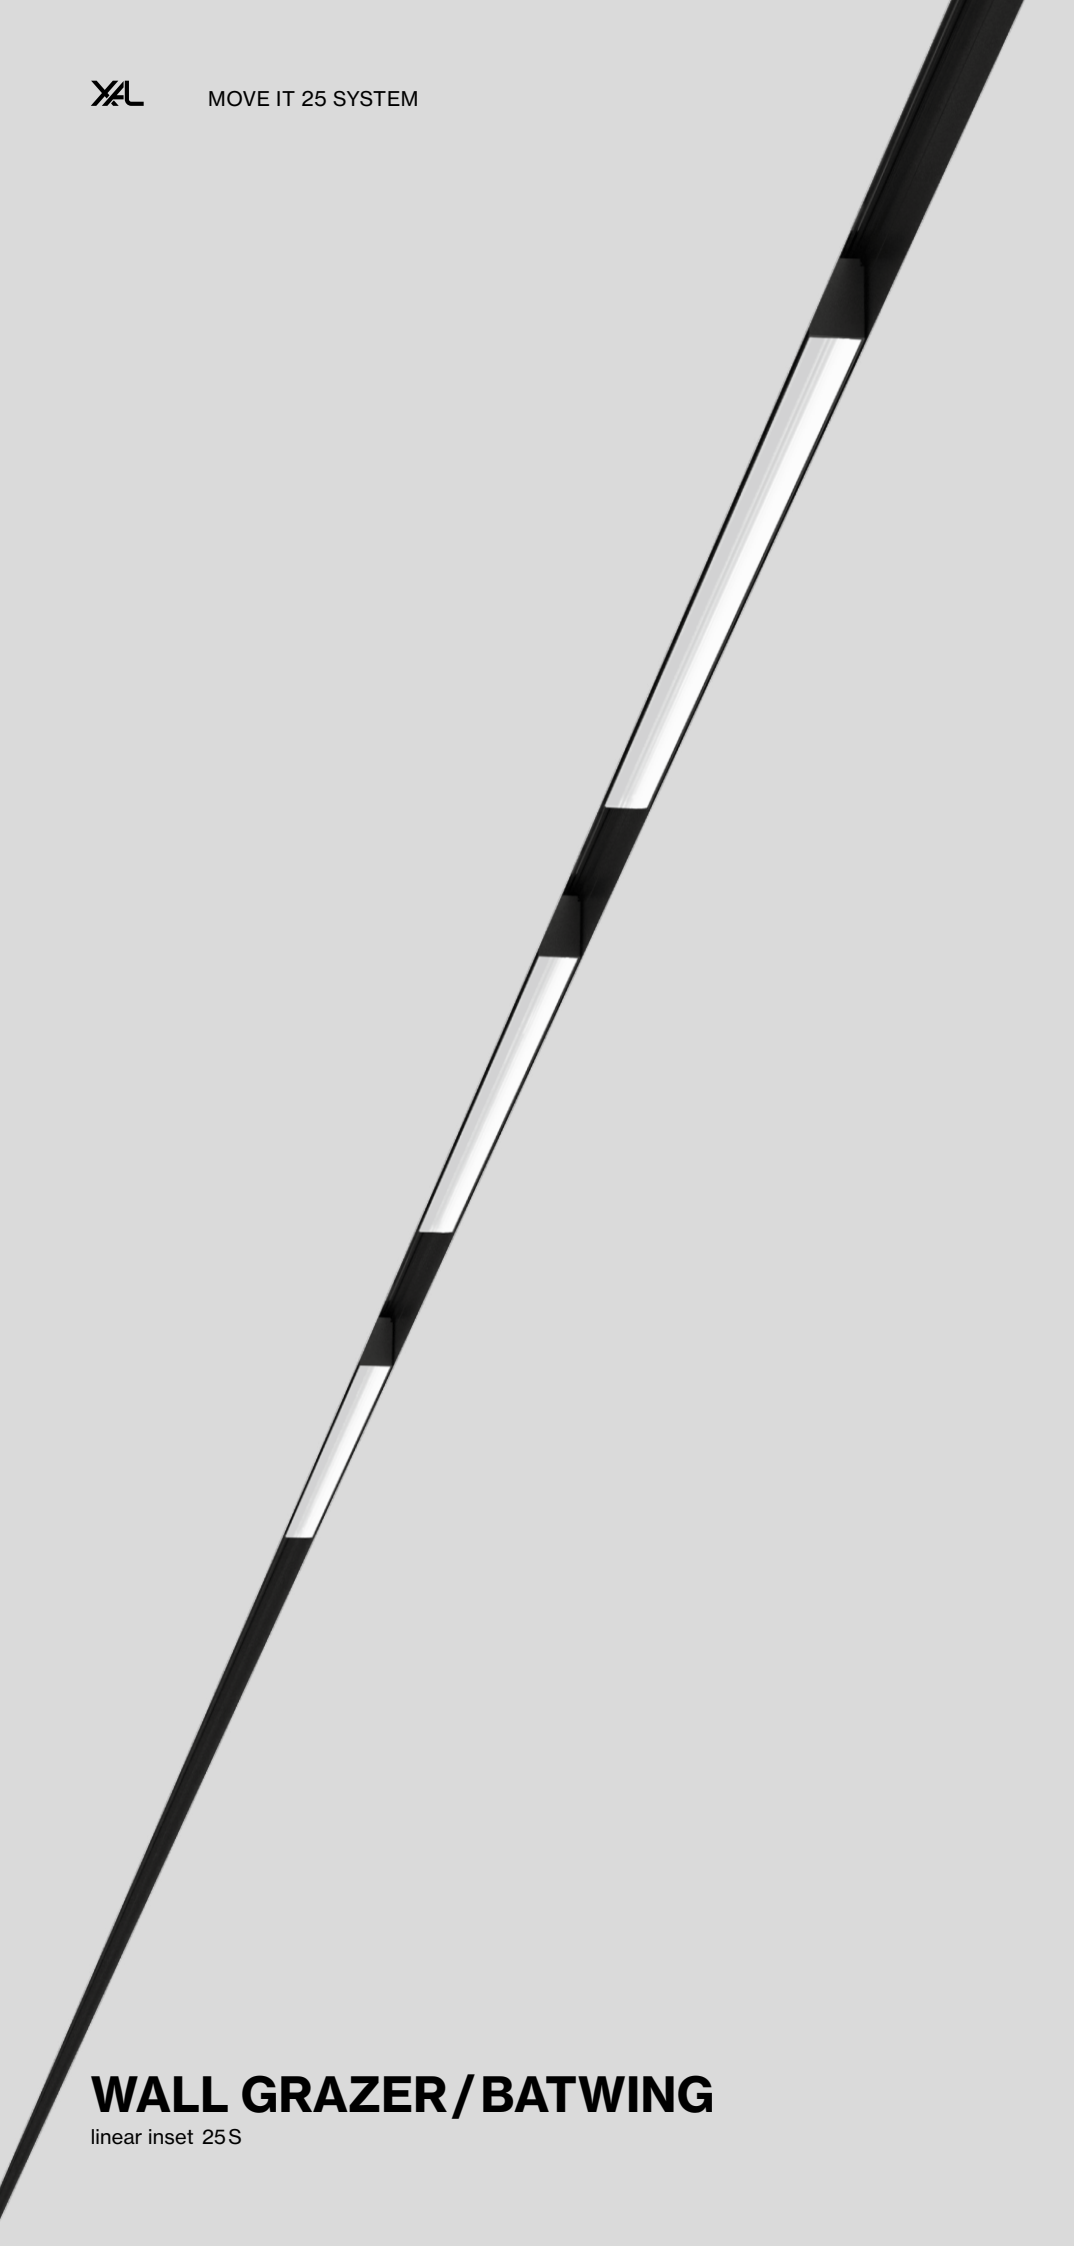

WALL GRAZER / BATWING


linear inset 25 S

Quickinfo

2700 K, 3000 K
CRI ≥ 90, 3 SDCM
WALL GRAZER up to 107 lm/W
BATWING up to 104 lm/W
L80 @ 50 000 h
non DIM, DALI-2


Types

MOVE IT 25 S



Light distributions





CRI ≥ 98
XPECTRUM

Order options

COLOUR TEMPERATURE

2700 K	4
3000 K	5

CONTROL

non DIM	1
DALI-2	3

MATERIAL COLOUR

● jet black RAL 9005

Options on request


COLOUR RENDERING INDEX

CRI ≥ 98 XPECTRUM

COLOUR TEMPERATURE

4000 K





LIGHT INSET 25 S

CRI ≥90 · DALI 1 ADDR. · 48 V · pending · CB pending

WALL GRAZER

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	525 lm	305	050-1211 ⁘ ⬍ 8S
	3000 K	564 lm		
10.6 W	2700 K	1050 lm	605	050-1212 ⁘ ⬍ 8S
	3000 K	1130 lm		
21.3 W	2700 K	2100 lm	1205	050-1214 ⁘ ⬍ 8S
	3000 K	2260 lm		
43 W	2700 K	4200 lm	2405	050-1218 ⁘ ⬍ 8S
	3000 K	4510 lm		






CRI ≥90 · DALI 1 ADDR. · 48 V · pending · CB pending


BATWING

INS. POWER	COLOUR TEMP.	LUM. FLUX	L (mm)	ORDER CODE
5.3 W	2700 K	512 lm	305	050-1211 ⁘ ⬍ 8B
	3000 K	550 lm		
10.6 W	2700 K	1020 lm	605	050-1212 ⁘ ⬍ 8B
	3000 K	1100 lm		
21.3 W	2700 K	2050 lm	1205	050-1214 ⁘ ⬍ 8B
	3000 K	2200 lm		
43 W	2700 K	4100 lm	2405	050-1218 ⁘ ⬍ 8B
	3000 K	4400 lm		

Light distributions



wall grazer



batwing

INSET POWER in watts is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI ≥ 90, colour black