




Quickinfo

3000 K, 4000 K
 CRI ≥ 95 (R9 ≥ 90)
 L90 @ 50 000 h
 up to 100 lm per spot
 non DIM, DALI-2

Type



Colours



Light distributions



MICRO

recessed

EN Round recessed spotlight in aluminium; surface lacquered; high quality lens system; precise radiation characteristic; energy-efficient LEDs with very good colour rendering; plug and play electrical connector system for toolless mounting; converter plug and play; converter separately available

DE Runder Einbaustrahler aus Aluminium; Oberfläche lackiert; hochwertige Linsensystem; präzise Abstrahlcharakteristik; energieeffiziente LEDs mit sehr guter Farbwiedergabe; durchkontaktiertes elektrisches Stecksystem für werkzeuglose Montage; Konverter steckerfertig vorkonfektioniert; Konverter ist separat zu bestellen




CRI ≥ 95
 R9 ≥ 90

Order options

COLOUR TEMPERATURE	
3000K	0
4000K	1

MATERIAL COLOUR	
● white aluminium RAL 9006	6
● black RAL 9021	8

BEAM ANGLE	
spot 18°	S
medium 30°	M
flood 39°	F



MICRO 10 recessed



INS. POWER	COLOUR TEMP.	LUM. FLUX	ORDER CODE
1.3W	3000K	92lm	0 1 1 - 8 1 0 0 :: 1 ▽ ▲
	4000K	100lm	

light inset incl. connection cable with socket 0.5m

Electrical accessories

POWER SUPPLY EU 220-240 V AC, 50-60Hz, PC II
incl. power cable 2m + connection cable with plug 1m

TYPE	L·W·H (mm)	ORDER CODE
15W non DIM 340mA	115-19-34	0 1 1 - 9 2 1 3 1 1 0
15W DALI-2 350mA	145-33-21	0 1 1 - 9 2 1 3 1 3 0

POWER SUPPLY UL 100-120 V AC, 50-60Hz, PC II
connection cable with plug 1m

TYPE	L·W·H (mm)	ORDER CODE
15W non DIM 340mA	115-19-34	0 1 1 - 9 2 8 3 1 1 0
25W DALI-2/1-10V 350mA	111-22-52	0 1 1 - 9 2 8 3 2 3 0

SPLITTER SERIAL, AWG20



TYPE	L·W·H (mm)	ORDER CODE
splitter 3×socket / 1×plug	38-30-10	0 1 1 - 9 2 2 8 3 0 0
splitter 6×socket / 1×plug	55-32-10	0 1 1 - 9 2 2 8 6 0 0

Other accessories

EXTENSION CABLE

TYPE	L (mm)	ORDER CODE
1×socket / 1×plug	1000	0 1 1 - 9 2 2 1 1 2 0
1×socket / 1×plug	2000	0 1 1 - 9 2 2 1 1 4 0
1×socket / 1×plug	4000	0 1 1 - 9 2 2 1 1 8 0

Light distributions

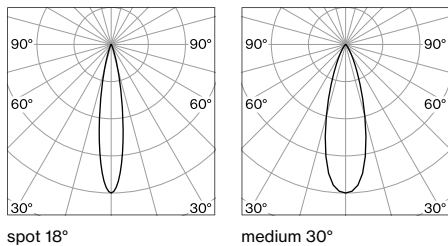

INSET POWER is the current consumption excluding any ballast
LUMINOUS FLUX value calculated for CRI≥95, medium lens, colour black