


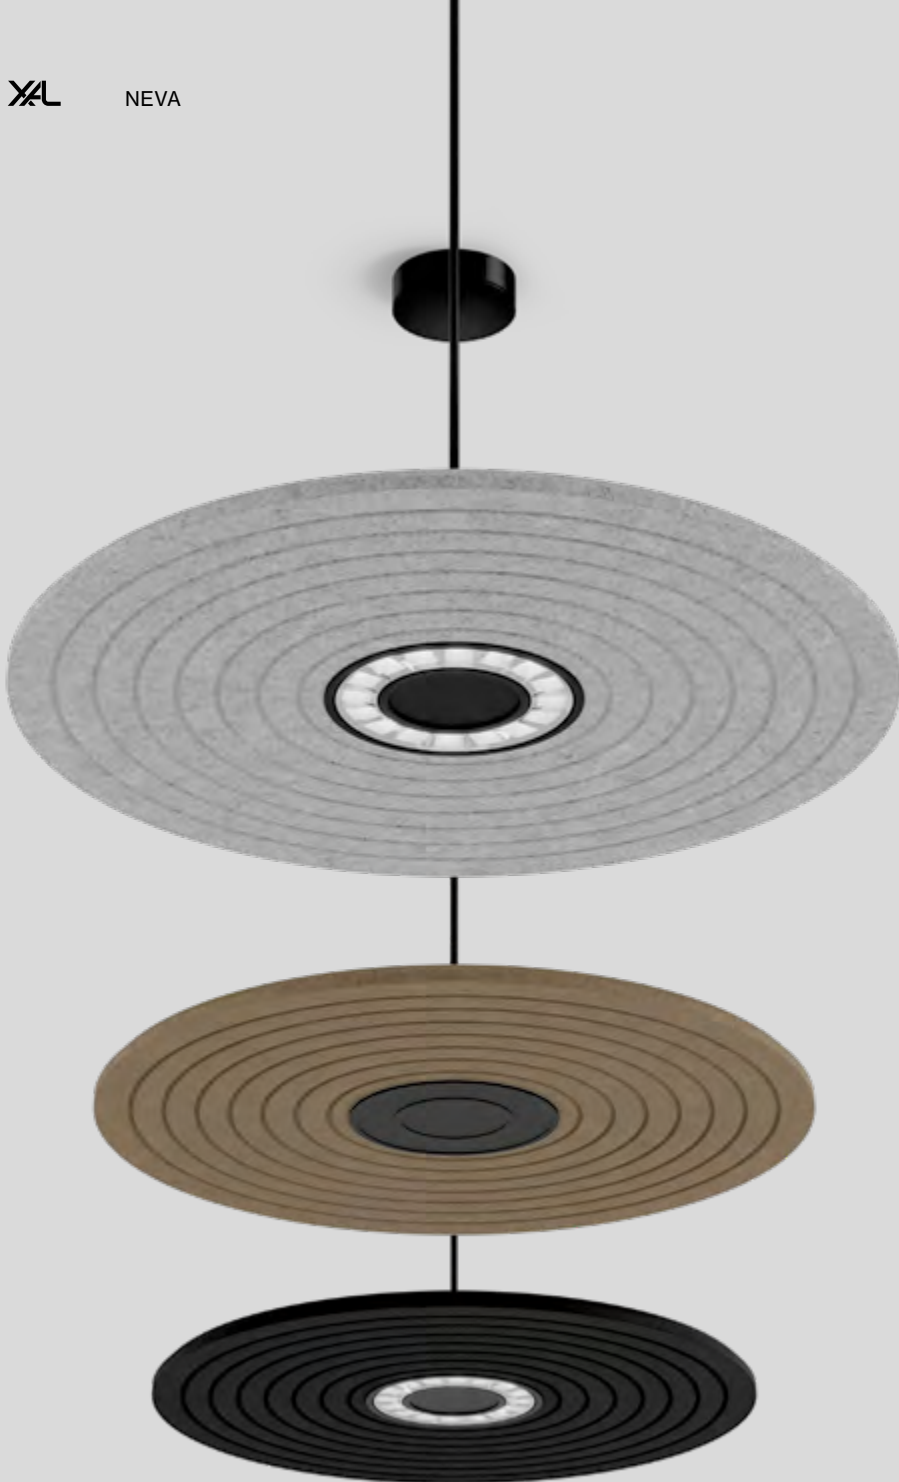

NEVA disc

acoustic suspended

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; round design; high quality visual and tactile surface with embossed pattern; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with MITA circle 240 acoustic suspended (LUMINAIRE or BLIND SUSPENSION); optionally with sensor (ESSENTIAL)

ES Elemento acústico de fieltro PET reciclado y autoportante de calidad superior con propiedades de absorción del sonido; forma redonda; superficie de alta calidad táctil y visual con motivos en relieve; absorción del sonido directo y del reflejado por el techo; con ello gran rendimiento acústico; montaje suspendido con MITA circle 240 acoustic suspended (LUMINAIRE o BLIND SUSPENSION); opcionalmente con sensor (ESSENTIAL)

Quickinfo


PET felt

♻️ from recycled material
up to absorption class A
suitable for workstations

🔥 flame retardant version available

3000 K, 4000 K
CRI ≥ 80, 3 SDCM
UGR ≤ 19 / 65° ≤ 1500 cd/m²
up to 161 lm/W
L95@50 000 h
DALI-2, ESSENTIAL sensor
reflector

Types



Acoustic colours




Luminaire colours




Light distribution



direct



flat height
25 mm



embossed
acoustic panel




DIN EN 12464-1
UGR ≤ 19

Order options

ACOUSTIC COLOUR	
☐ white	W
☐ marble grey	D
☐ felt grey	G
☐ anthracite	B
☐ black	L
☐ limestone	S

other colours on request




NEVA disc

 PET felt	<table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td colspan="5">$\alpha_w 1.00$</td></tr></table>	A	B	C	D	E	$\alpha_w 1.00$					<table><tr><td>1.05</td><td>1.02</td></tr><tr><td>NRC</td><td>SAA</td></tr></table>	1.05	1.02	NRC	SAA
A	B	C	D	E												
$\alpha_w 1.00$																
1.05	1.02															
NRC	SAA															

TYPE	Ø-H (mm)	ORDER CODE
800 disc	754:25	0 9 1 - 3 2 1 1 1 0 ☒
1200 disc	1182:25	0 9 1 - 3 2 1 2 1 0 ☒

Acoustic data

Equivalent sound absorption area (A_{eq})						
TYPE	125	250	500	1000	2000	4000 Hz
800 disc	0.15	0.38	0.50	0.50	0.50	0.50
1200 disc	0.34	0.85	1.13	1.13	1.13	1.13

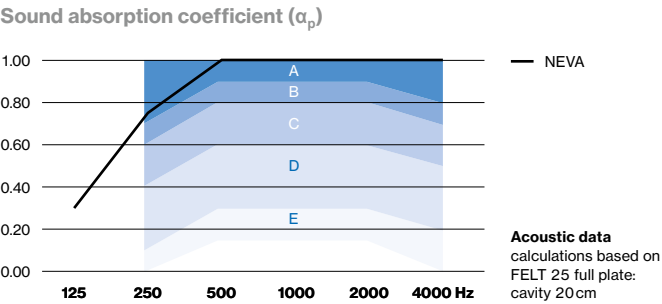

Order options

COLOUR TEMPERATURE	
3000 K	5
4000 K	6


CONTROL	
DALI-2	3
DALI-2 ESSENTIAL sensor (brightness & presence)*	B

*DALI-2 application controller needed

MATERIAL COLOUR	
☐ traffic white RAL 9016	7
☒ jet black RAL 9005	8

REFLECTOR COLOUR	
☒ chrome	R
☐ dark chrome	B

LUMINOUS FLUX value calculated for colour white, reflector chrome



MITA circle 240 acoustic suspended

UGR ≤ 19	cd/m² ≤ 1500	DALI 1ADDR	220-240V	X-PERT	X-PERT

LUMINAIRE			
SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.7 W	3000 K	1940 lm	0 9 1 - 3 1 8 0 ☒ ☒ ☒
	4000 K	2210 lm	
15 W	3000 K	2090 lm	0 9 1 - 3 1 8 1 ☒ ☒ ☒
	4000 K	2380 lm	

BLIND SUSPENSION	
TYPE	ORDER CODE
240 round	0 9 1 - 3 1 9 0 0 0 ☒