


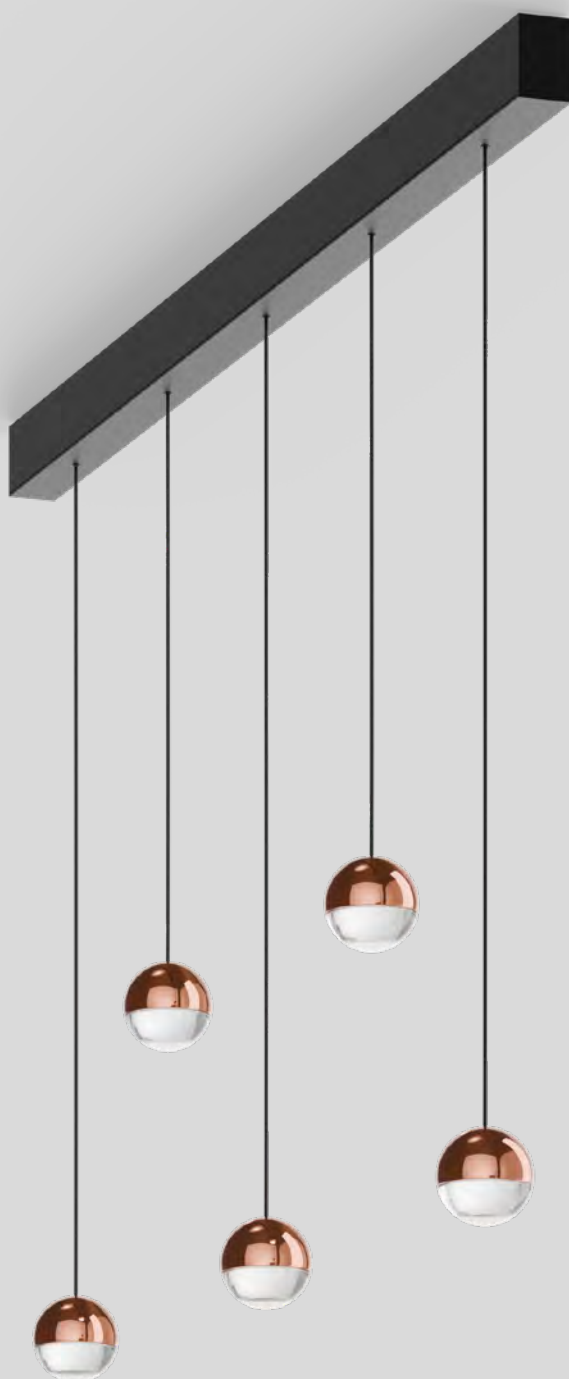

NOBA

multi linear suspended


^{EN} Decorative suspended luminaire in aluminium; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; linear ceiling surface mounted canopy (black or white) optionally for two to five lamps fittings; high quality plano-convex glass lens; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

^{DE} Dekorative Pendelleuchte aus Aluminium; Oberfläche chrom poliert, Aluminium gebürstet oder pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; linearer Deckenanbau-Baldachin (schwarz oder weiß) wahlweise für zwei- bis fünfflämmige Bestückung; hochwertige plan-konvexe Glaslinse; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90
up to 158 lm/W
L90 @ 50 000 h
DALI-2, Casambi

Type



Canopy colours



standard


Luminaire colours



Light distribution



direct



free positioning by
cable and hook



high quality
glass lens

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1

CONTROL

DALI-2	3
Casambi	9

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9

CABLE COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8


MATERIAL COLOUR

CANOPY/ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE


wide flood 67°



NOBA multi linear suspended

CANOPY 220-240 V AC, 50-60 Hz, ⚡ PC I

TYPE	INSETS	L-W-H (mm)	ORDER CODE
300 mA	2-5 insets	1000-34-50	0 0 5 - 2 6 9 2 0 ▣




NOBA 40



DIRECT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
2.4 W	2700 K	326 lm	0 4 9 - 5 4 1 0 :: 1 ▣ ▣ W
	3000 K	322 lm	
	4000 K	352 lm	




NOBA 50



DIRECT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
2.4 W	2700 K	345 lm	0 4 9 - 5 4 1 3 :: 1 ▣ ▣ W
	3000 K	342 lm	
	4000 K	374 lm	



NOBA 60



DIRECT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
2.4 W	2700 K	356 lm	0 4 9 - 5 4 1 6 :: 1 ▣ ▣ W
	3000 K	352 lm	
	4000 K	385 lm	

Mounting accessories



HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	0 3 0 - 1 0 0 0 1 ▣

INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white



NOBA

multi round suspended


EN Decorative suspended luminaire in aluminium; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; round ceiling surface mounted canopy (black or white) optionally for two to five lamps or two to ten lamps fittings; high quality plano-convex glass lens; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

DE Dekorative Pendelleuchte aus Aluminium; Oberfläche chrom poliert, Aluminium gebürstet oder pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; runder Deckenanbau-Baldachin (schwarz oder weiß) wahlweise für zwei- bis fünfflammige bzw. zwei- bis zehnlammige Bestückung; hochwertige plan-konvexe Glaslinse; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90
up to 158 lm/W
L90 @ 50 000 h
DALI-2, Casambi

Type



Canopy colours



standard


Luminaire colours



Light distribution



direct



free positioning by
cable and hook



high quality
glass lens

Order options

COLOUR TEMPERATURE

2700 K	9
3000 K	0
4000 K	1

CONTROL

DALI-2	3
Casambi	9

COVER

with slots	0
without slots	1

MATERIAL COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8
● brushed aluminium	6
● chrome	4
● gun metal	5
● brushed brass	3
● rose gold	9

CABLE COLOUR

○ traffic white RAL 9016	7
● jet black RAL 9005	8

MATERIAL COLOUR


CANOPY/ACCESSORIES

○ traffic white RAL 9016	7
● jet black RAL 9005	8

BEAM ANGLE

wide flood 67°

ø 380
43




NOBA multi round suspended

CANOPY 220-240 V AC, 50-60 Hz, PC I


TYPE	INSETS	Ø-H (mm)	ORDER CODE
300 mA	2-5 insets	380-43	0 0 5 - 2 6 9 0 1
2×300 mA	2-10 insets	380-43	0 0 5 - 2 6 9 1 1

*1 DALI address; **2 converter a 300 mA, 2 DALI addresses




DIRECT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
2.4 W	2700 K	326 lm	0 4 9 - 5 4 1 0 1 1
	3000 K	322 lm	
	4000 K	352 lm	



DIRECT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
2.4 W	2700 K	345 lm	0 4 9 - 5 4 1 3 1 1
	3000 K	342 lm	
	4000 K	374 lm	



DIRECT

INSET POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
2.4 W	2700 K	356 lm	0 4 9 - 5 4 1 6 1 1
	3000 K	352 lm	
	4000 K	385 lm	

Mounting accessories

HOOK ceiling mounted

TYPE	Ø-H (mm)	ORDER CODE
hook	16-30	0 3 0 - 1 0 0 0 1 1



INSET POWER is the current consumption excluding any ballast

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white