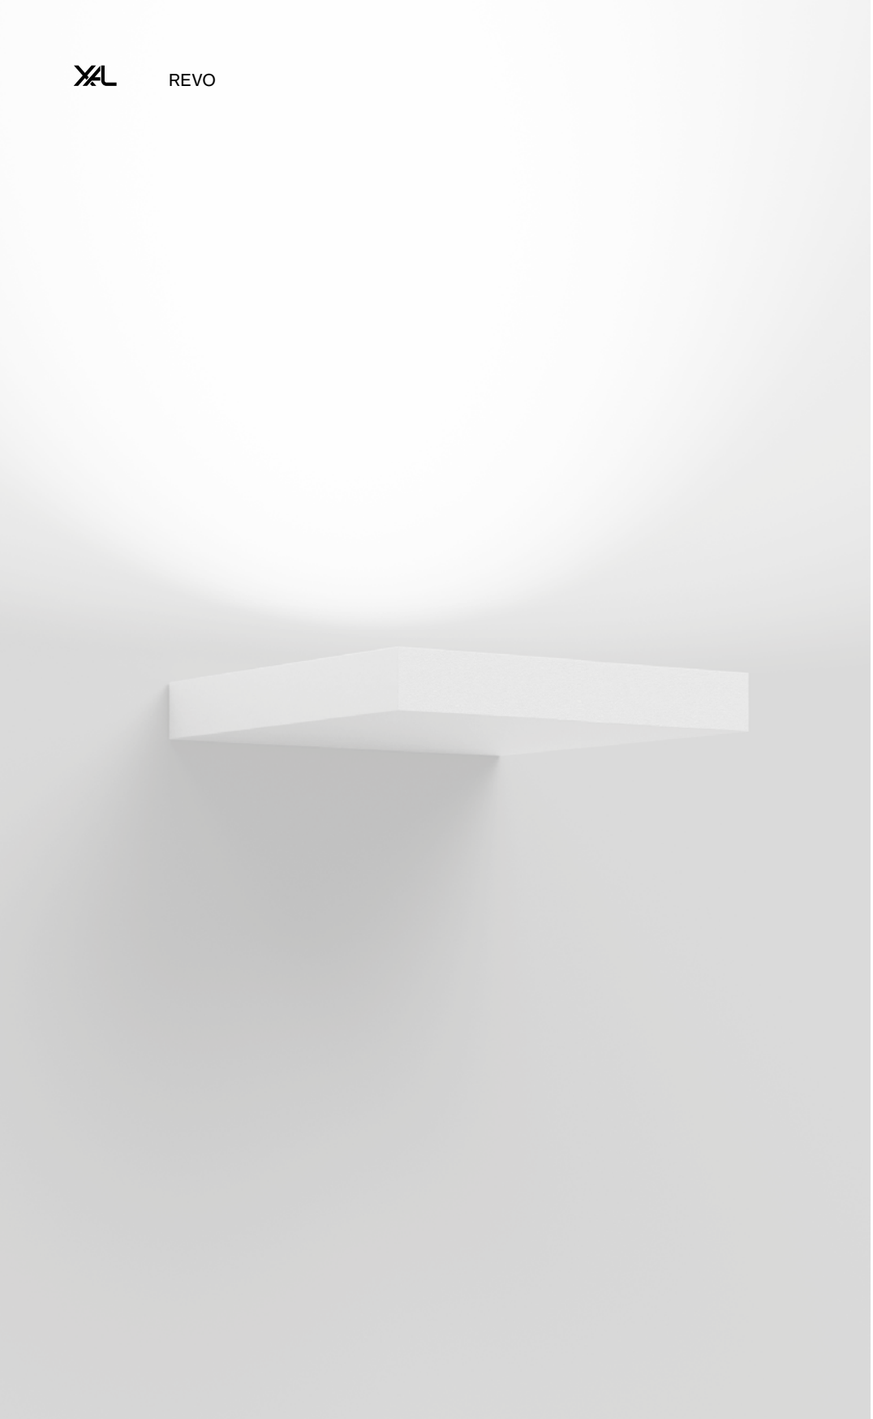

REVO

wall surface

EN Rectangular wall surface mounted luminaire made from aluminium, available in different sizes; surface raw or powder coated; converter integrated into luminaire housing; with high quality lens system with precise radiation characteristic; homogeneous wall or ceiling illumination through uniform light distribution; energy-efficient high power LEDs with very good colour rendering; luminaire for through wiring

DE Rechteckige Wandanbauleuchte in unterschiedlichen Größen aus Aluminium; Oberfläche roh oder pulverbeschichtet; Konverter im Leuchtenkörper integriert; mit hochwertiger Linsenoptik mit präziser Abstrahlcharakteristik; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; Leuchte für Weiterverdrahtung

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90, 2 SDCM
up to 3900 lm | up to 130 lm/W
L90 @ 50 000 h
non DIM, DALI-2

Types



Colours

Light distribution

Order options

COLOUR TEMPERATURE	
2700 K	9
3000 K	0
3500 K	2
4000 K	1

CONTROL	
non DIM	1
DALI-2	3

MATERIAL COLOUR	
traffic white RAL 9016	7
jet black RAL 9005	1
raw aluminium	0



REVO 150 wall surface

CRI ≥90 | DALI 1 ADDR. | 220-240V | X-PERT | X-PERT

INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
23.6 W	2700 K	2260 lm	058-7110
	3000 K	2330 lm	
	3500 K	2260 lm	
	4000 K	2450 lm	



REVO 180 wall surface

CRI ≥90 | DALI 1 ADDR. | 220-240V | X-PERT | X-PERT

INDIRECT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
30.1 W	2700 K	3680 lm	058-7140
	3000 K	3680 lm	
	3500 K	3830 lm	
	4000 K	3910 lm	



slim design

homogeneous ceiling illumination

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white