

# BETO indirect power

suspended


074-62N9D38



Project / Type


Notes

Count / Date

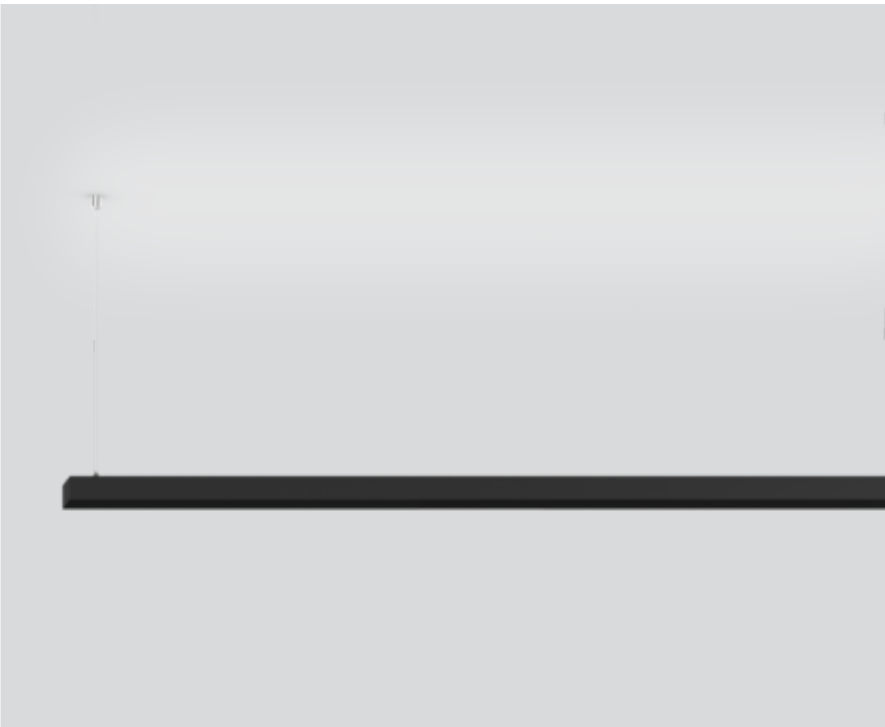


Luminaire housing made of extruded aluminium profile; extremely slim design (only 42 x 42 mm); light tight final end caps made of aluminium; no visible screws; angular design; surface black powder coated; suspended luminaire with 1500mm cable suspension; with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; freely positionable; incl. feed (black); extruded profile for improved thermal management; light colour: tunable white diodes (2700-6500 K); binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 / DT8 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



### General

Ceiling | Suspended

black | RAL 9005 <sup>1</sup>

Reflector chrome

IP20

6870 lm

2870 lm/m

### LED

tunable white | 2700 K - 6500 K

CRI  $\geq 90$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 101 | R<sub>f</sub>: 90 | R<sub>t(1-15)</sub>: 88

MR 0.51 | MDER 0.46

### Optical

Reflector | symmetric

PstLM  $\leq 1.0$  <sup>2 3 4</sup> | SVM  $\leq 0.4$  <sup>2 3 4</sup>

### Electrical

DALI-2 DT8 | 3 DALI Addr.

PC1 | 220-240 V

system 63 W

system 109 lm/W <sup>5</sup>

26 W/m

### Physical

length 3457 mm | width 42 mm | height 42 mm

4.3 kg

<sup>1</sup> RAL code <sup>2</sup> combined <sup>3</sup> segment

<sup>4</sup> Value of containing product at full load (undimmed)

<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator

