

Description

EN Bollard luminaire in aluminium in a simple, minimalist design; luminaire head with integrated cooling fins; $\pm 90^\circ$ tiltable, lockable every 30° ; anodised surface and dark grey powder coated; optional mounting on screw-on base or with anchorage unit (available as an accessory); partially printed safety glass, fixed with stainless steel screws; high quality lens system asymmetrical light distribution; energy-efficient LEDs with very good colour rendering; binning initial ≤ 3 MacAdam; available in the light colour 3000 K; CRI ≥ 80 ; min. 95% of the luminous flux after 50 000 hours; degree of protection IP65, with pressure compensation valve and optional surge protection typ 2 with nominal discharge current 3 kA; PC I; shock resistance IK07; ambient temperatures from -20°C to $+50^\circ\text{C}$; separate luminaire wiring compartment, suitable for through wiring

ES Lámpara de bolardo de aluminio en diseño sencillo, reducido; Cabezal de lámpara con aletas de refrigeración; Orientable $\pm 90^\circ$ y fijable cada 30° ; superficie anodizada y pintada al polvo en gris oscuro; montaje opcional atornillada o con anclajes de hormigón (disponible como accesorio); cristal seguridad parcialmente grabado, fijado con tornillos acero inoxidable; óptica de alta calidad con distribución de luz asimétrica; LEDS de alta eficiencia que proporcionan una alta reproducción cromática; binning inicial ≤ 3 MacAdam; disponible en 3000 K; CRI ≥ 80 ; mínimo 95% del flujo luminoso después de 50.000 h de vida útil; tipo protección IP 65, con válvula compensación presión y opcio. protección sobretensión tipo 2 corriente de fuga nominal 3 kA; CP I; resistencia al impacto IK 07; temperatura ambiente de -20°C a $+50^\circ\text{C}$; espacio de conexión de lámpara separado, apropiado para cableado pasante


STREAMCUT

bollard

Quickinfo

3000 K
CRI ≥ 80
L95 @ 50000h
up to 2500 lm
non DIM
IK07, IP65

Type



Colour



Light distribution



asym-
metric

Order options

IP RATING

IP65

SURGE PROTECTION

yes **5** 2
no 1

COLOUR TEMPERATURE

3000K

CONTROL

non DIM

MATERIAL COLOUR



dark grey



Options on request

COLOR RENDERING INDEX

CRI ≥ 90 (35W)



STREAMCUT bollard




35W version available from Q3/2021

IP65 ASYMMETRIC

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14W	3000K	1120lm	0 8 8 - 2 8 1 5 1 D A
35W	3000K	2500lm	0 8 8 - 2 8 4 5 1 D A

Illumination example

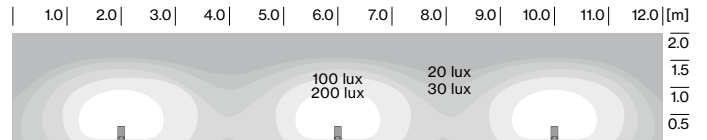

STREAMCUT bollard (14W, 3 luminaires)
Distance between luminaires: 4.30m

Accessory

ANCHORAGE UNIT

TYPE	L·W·H (mm)	ORDER CODE
anchorage unit	84-32-590	0 8 8 - 2 8 9 3 1 1 0

