


UNICO square / linear

recessed

Project / Type



Date

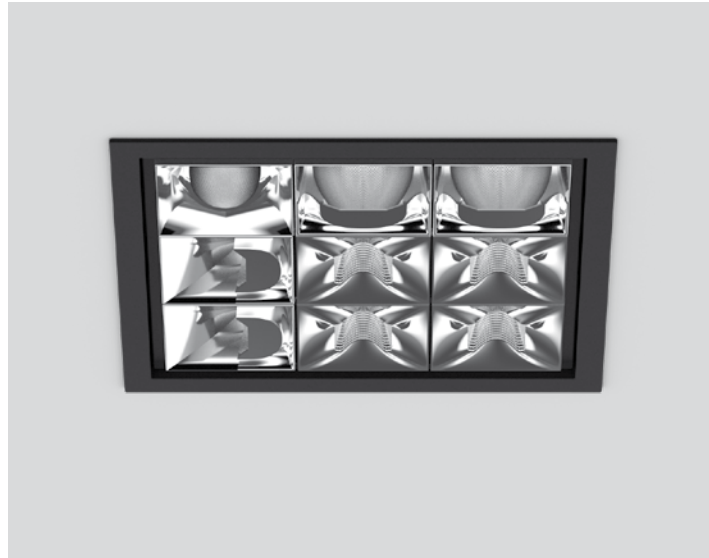

ONE FIXTURE - ENDLESS POSSIBILITIES HIGH-QUALITY REFLECTOR TECHNOLOGY DIFFERENT LIGHT OPTICS

General	ceiling recessed housing with trim, trimless IP20
LED	L90 / 50 000 h CRI ≥ 90, SDCM ≤ 2-step binning 2700 K, 3000 K, 3500 K, 4000 K
Optical	spot, medium, flood, wide flood lens optic UGR ≤ 10, UGR ≤ 16, UGR ≤ 19 wallwasher reflector optic wallwasher floor reflector optic
Electrical	up to 143 lm/W up to 394 lm/cell delivered 0-10V (0.1%, 120-277V), Triac (1%, 120-277V)
Physical	traffic white, jet black fixture: aluminum reflector: chrome, black housing: galvanized steel

Dimensions

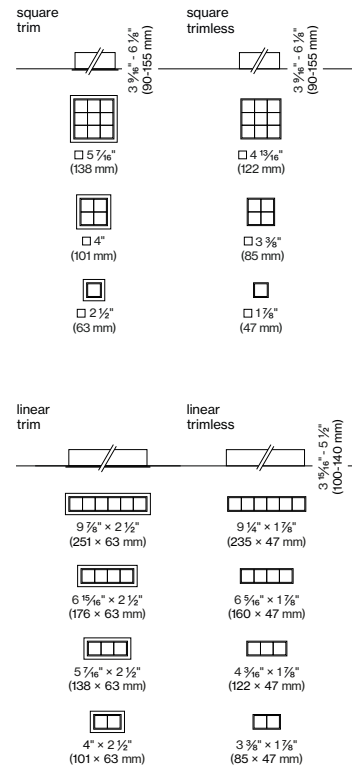

Square or rectangular recessed multi-downlight made of die-cast aluminum; equipped with one (Q1) / two (L2) / three (L3) / four (L4/Q4) / six (L6) / nine (Q9) individually selectable, customised light elements; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 0.1-1"; surface powder coated; installation possible in different housings; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with excellent colour rendering