



reddot award 2015  
winner



## TASK

free standing


**EN** Free standing luminaire with rectangular luminaire head made of aluminium and rounded edges; ultra low-profile design (only 15 mm); rectangular downpipe; pedestal with recess for table base; powder coated; direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed up and down by laser engraving; optional: indirect component with special PCBs for increased luminous flux, optionally inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. Loxone Air module for easy integration into the Loxone home and building automation system; incl. connection cable (3 m) with safety plug

**DE** Stehleuchte mit rechteckigem Leuchtenkopf aus Aluminium und abgerundeten Kanten; extrem flache Bauform (nur 15 mm); Standrohr rechteckig; Standfuß mit Ausnehmung für Tischfuß; pulverbeschichtet; direkt/indirekte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach oben und unten gelenkt; optional: Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom, wahlweise schräg gerichtete Platinen für asymmetrische Abstrahlcharakteristik; absolut homogene Ausleuchtung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schalter im Standrohr verbaut; inkl. Loxone Air Modul zur einfachen Integration in die Loxone Haus- & Gebäudeautomation; inkl. Anschlussleitung (3 m) mit Schutzkontaktstecker

### Quickinfo

3000 K, 4000 K  
CRI  $\geq 90$ , 3 SDCM  
UGR  $\leq 19$  /  $65^\circ \leq 3000 \text{ cd/m}^2$   
up to 129 lm/W  
L90 @ 50 000 h  
Loxone Air  
touch DIM on pole  
brightness & presence sensor  
microprismatic (UGR  $\leq 19$ )


### Type



### Colours




### Light distributions



lighting control by  
Loxone Air



control by touch  
DIM on pole




suitable for  
double workstation

## Order options

## BASE PLATE

U-shape	4
T-shape	5



## COLOUR TEMPERATURE

3000 K	0
4000 K	1

## CONTROL


Loxone Air incl.	T
touch DIM on pole	
Loxone Air incl.	S
ESSENTIAL sensor (brightness & presence)	

## MATERIAL COLOUR


○ pure white RAL 9010	7
● white aluminium RAL 9006	6
● jet black RAL 9005	8
● special colours p. 992	X

## LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)

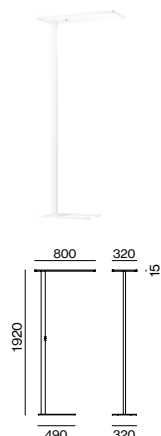


## TASK free standing




## DIRECT / INDIRECT SOFT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
71 W	3000 K	↓4100 / ↑3350 lm	0 5 9 - 2 9 U 3 :: Z
	4000 K	↓4370 / ↑3560 lm	



## DIRECT / INDIRECT POWER




SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
80 W	3000 K	↓2400 / ↑7330 lm	0 5 9 - 2 9 U 2 :: Z
	4000 K	↓2550 / ↑7800 lm	



## DIRECT / INDIRECT ASYMMETRIC POWER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
97 W	3000 K	↓1900 / ↑9300 lm	0 5 9 - 2 9 U 1 :: Z
	4000 K	↓2030 / ↑9960 lm	

## Light distributions

microprismatic  
direct/indirect softmicroprismatic  
direct/indirect powermicroprismatic  
direct/indirect asym. power