


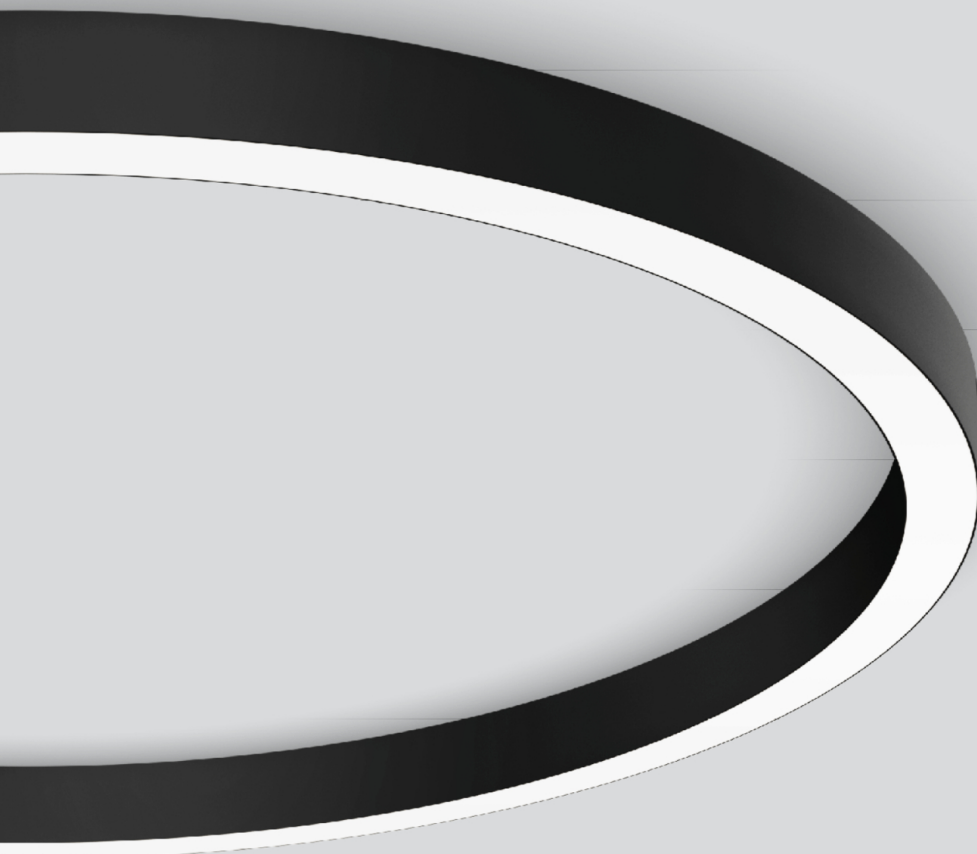

MINO 60 CIRCLE

ceiling


EN Ring shaped luminaire housing from rolled aluminium extruded profile, seamlessly welded; surface powder coated; light inset consisting of highly reflective coated die-cast aluminium for improved thermal management; HPO (High Performance Opal) cover for uniform illumination; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; sound absorbing elements available; energy-efficient LEDs with very good colour rendering

DE Ringförmiger Leuchtenkörper aus gerolltem Aluminiumstrangpressprofil nahtlos verschweißt; Oberfläche pulverbeschichtet; Lichteinsatz bestehend aus hochreflektierend lackiertem Aluminiumdruckguss für verbessertes Thermomanagement; HPO (High Performance Opal) Abdeckung für homogene Ausleuchtung; mikroprismatische PMMA-Abdeckung inkl. Diffusorfolie zur Reduktion der Leuchtdichte bei homogener Ausleuchtung; schallabsorbierende Elemente erhältlich; energieeffiziente LEDs mit sehr guter Farbwiedergabe

Quickinfo

3000 K, 4000 K
CRI $\geq$ 80 / 3 SDCM
bis zu 145 lm/W
L90 / 50000 h
DALI-2
High Performance Opal,
Microprismatic
IP20

Types



Farbe




Lichtverteilung



DiiA® standards
251, 252, 253




direct / indirect
illumination



microprismatic



acoustic
elements



MINO 60 CIRCLE 1000 ceiling




OPAL | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
53.0 W	3000 K	6570 lm	124 lm/W	0 3 4 - 2 1 1 2 5 3  H
	4000 K	7480 lm	141 lm/W	0 3 4 - 2 1 1 2 6 3  H

MICROPRISMATIC | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
53.0 W	3000 K	5710 lm	108 lm/W	0 3 4 - 2 1 1 2 5 3  Z
	4000 K	6500 lm	123 lm/W	0 3 4 - 2 1 1 2 6 3  Z



MINO 60 CIRCLE 1500 ceiling




OPAL | DIRECT CRI ≥ 80, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
83.0 W	3000 K	10500 lm	127 lm/W	0 3 4 - 2 1 1 0 5 3  H
	4000 K	12000 lm	145 lm/W	0 3 4 - 2 1 1 0 6 3  H

MICROPRISMATIC | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
83.0 W	3000 K	9130 lm	110 lm/W	0 3 4 - 2 1 1 0 5 3  Z
	4000 K	10400 lm	125 lm/W	0 3 4 - 2 1 1 0 6 3  Z



MINO 60 CIRCLE 3000 ceiling




OPAL | DIRECT CRI ≥ 80, DALI-2, pure white

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
167.0 W	3000 K	21200 lm	127 lm/W	0 3 4 - 2 1 1 4 5 3 7 H
	4000 K	24100 lm	144 lm/W	0 3 4 - 2 1 1 4 6 3 7 H


other configurations see MINO 60 CURVE system

Order options

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
white aluminium RAL 9006	G
special colours	X




MINO 60 CIRCLE 6000 ceiling



OPAL | DIRECT CRI ≥ 80, DALI-2, pure white

SYSTEM	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
334.0 W	3000 K	42300 lm	127 lm/W	0 3 4 - 2 1 1 6 5 3 7 H
	4000 K	48100 lm	144 lm/W	0 3 4 - 2 1 1 6 6 3 7 H


other configurations see MINO 60 CURVE system



Acoustic accessories (optional)


MINO CIRCLE ACOUSTIC 1000 inlay

COLOUR	Ø-H (mm)	ORDER CODE
anthracite	937-24	0 3 4 - 2 7 0 1 1 1 B
marble grey	937-24	0 3 4 - 2 7 0 1 1 1 D
black	937-24	0 3 4 - 2 7 0 1 1 1 L
limestone	937-24	0 3 4 - 2 7 0 1 1 1 S
white	937-24	0 3 4 - 2 7 0 1 1 1 W



MINO CIRCLE ACOUSTIC 1500 inlay

COLOUR	Ø-H (mm)	ORDER CODE
anthracite	1434-24	0 3 4 - 2 7 0 2 1 1 B
marble grey	1434-24	0 3 4 - 2 7 0 2 1 1 D
black	1434-24	0 3 4 - 2 7 0 2 1 1 L
limestone	1434-24	0 3 4 - 2 7 0 2 1 1 S
white	1434-24	0 3 4 - 2 7 0 2 1 1 W



PLANDAY COPENHAGEN

Dänemark

Lighting Design

Anker & Co

Fotograf

Kris Dekeijser



Verwendete Produkte



MINO 60 CIRCLE
ceiling



MINO CIRCLE
acoustic inlay

