


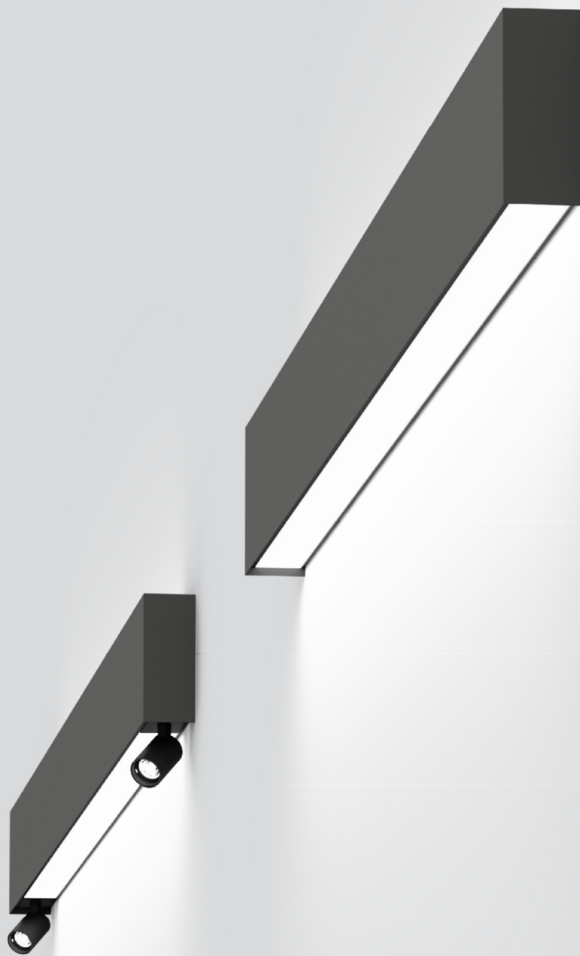

LINEA


^{EN} Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; HPO (High Performance Opal) cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed; optionally with switch for the JUST 26 spotlight modules

^{DE} Leuchtenkörper und Frontabdeckung aus Aluminiumstrangpressprofil, kantige Ausführung; keine sichtbaren Schrauben; Oberfläche pulverbeschichtet; geeignet für Wandmontage; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige direkt/indirekte Lichtverteilung; HPO (High Performance Opal) Abdeckung für homogene Ausleuchtung; oder mit speziell berechneter, asymmetrischer Linse für homogene Beleuchtungsstärken (Montage wahlweise zur Boden- oder Deckenaufhellung); energieeffiziente LEDs mit sehr guter Farbwiedergabe; wahlweise JUST 26 Strahlereinsatz einsetzbar; optional mit Schalter für JUST 26 Strahlereinsätze

Quickinfo

3000 K, 4000 K, tunable white
2700 K - 5000 K
CRI $\geq$ 90, CRI $\geq$ 97 / 3 SDCM
bis zu $\downarrow$ 4,030 lm / $\uparrow$ 4,790 lm
bis zu 3,670 lm/m
bis zu 121 lm/W
L80 / 50000 h, L85 / 50000 h,
L95 / 50000 h
DALI-2, DALI-2 / DIM Schalter (nur Strahler), nicht dimmbar, non DIM / Ein-/Ausschalter (nur Strahler)
High Performance Opal, High Performance Opal / Asymmetric IP20

Types




Farbe




Lichtverteilung




system solution



CRI $\geq$ 98
XPECTRUM
(optional)



LINEA wall



OPAL / ASYMMETRIC CRI ≥ 90


SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
9.7 W	310 mm	3000 K	↓428/↑509 lm	97 lm/W	0 5 8 - 6 1 7 1 5   A A
		4000 K	↓472/↑562 lm	107 lm/W	0 5 8 - 6 1 7 1 6   A A
17.6 W	610 mm	3000 K	↓881/↑1050 lm	110 lm/W	0 5 8 - 6 1 7 2 5   A A
		4000 K	↓972/↑1160 lm	121 lm/W	0 5 8 - 6 1 7 2 6   A A
20.9 W	610 mm	tunable w.	↓1010/↑1200 lm	106 lm/W	0 5 8 - 6 1 7 2 D 3  A A
35.0 W	1210 mm	3000 K	↓1760/↑2090 lm	110 lm/W	0 5 8 - 6 1 7 4 5   A A
		4000 K	↓1940/↑2310 lm	121 lm/W	0 5 8 - 6 1 7 4 6   A A
42.0 W	1210 mm	tunable w.	↓2020/↑2400 lm	105 lm/W	0 5 8 - 6 1 7 4 D 3   A A
71.0 W	2410 mm	3000 K	↓3520/↑4190 lm	109 lm/W	0 5 8 - 6 1 7 8 5   A A
		4000 K	↓3890/↑4620 lm	120 lm/W	0 5 8 - 6 1 7 8 6   A A
83.0 W	2410 mm	tunable w.	↓4030/↑4790 lm	106 lm/W	0 5 8 - 6 1 7 8 D 3   A A

OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
9.7 W	310 mm	3000 K	↓428/↑428 lm	88 lm/W	0 5 8 - 6 1 7 1 5   A H
		4000 K	↓472/↑472 lm	97 lm/W	0 5 8 - 6 1 7 1 6   A H
17.6 W	610 mm	3000 K	↓881/↑881 lm	100 lm/W	0 5 8 - 6 1 7 2 5   A H
		4000 K	↓972/↑972 lm	110 lm/W	0 5 8 - 6 1 7 2 6   A H
20.9 W	610 mm	tunable w.	↓1010/↑1010 lm	97 lm/W	0 5 8 - 6 1 7 2 D 3  A H
35.0 W	1210 mm	3000 K	↓1760/↑1760 lm	101 lm/W	0 5 8 - 6 1 7 4 5   A H
		4000 K	↓1940/↑1940 lm	111 lm/W	0 5 8 - 6 1 7 4 6   A H
42.0 W	1210 mm	tunable w.	↓2020/↑2020 lm	96 lm/W	0 5 8 - 6 1 7 4 D 3  A H
71.0 W	2410 mm	3000 K	↓3520/↑3520 lm	99 lm/W	0 5 8 - 6 1 7 8 5   A H
		4000 K	↓3890/↑3890 lm	110 lm/W	0 5 8 - 6 1 7 8 6   A H
83.0 W	2410 mm	tunable w.	↓4030/↑4030 lm	97 lm/W	0 5 8 - 6 1 7 8 D 3  A H



LINEA 1 spotlight wall



OPAL / OPAL | 1 SPOTLIGHT CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
17.6 W	710 mm	3000 K	↓873/↑873 lm	99 lm/W	0 5 8 - 6 1 7 2 5    H
		4000 K	↓963/↑963 lm	109 lm/W	0 5 8 - 6 1 7 2 6    H
20.9 W	710 mm	tunable w.	↓1010/↑1010 lm	97 lm/W	0 5 8 - 6 1 7 2 D    H
35.0 W	1310 mm	3000 K	↓1760/↑1720 lm	99 lm/W	0 5 8 - 6 1 7 4 5    H
		4000 K	↓1940/↑1900 lm	110 lm/W	0 5 8 - 6 1 7 4 6    H
42.0 W	1310 mm	tunable w.	↓2020/↑2020 lm	96 lm/W	0 5 8 - 6 1 7 4 D    H
70.0 W	2510 mm	3000 K	↓3490/↑3490 lm	100 lm/W	0 5 8 - 6 1 7 8 5    H
		4000 K	↓3850/↑3850 lm	110 lm/W	0 5 8 - 6 1 7 8 6    H
83.0 W	2510 mm	tunable w.	↓4030/↑4030 lm	97 lm/W	0 5 8 - 6 1 7 8 D    H

spotlight 1 x 2,6 W / 159 lm only with 3000 K

Order options

CONTROL		CONTROL		COLOUR	
non DIM	1	non DIM / ON OFF switch (only spotlights)	2	DALI-2	3
DALI-2	3	DALI-2	3	DALI-2 / DIM switch (only spotlights)	4
		DALI-2 / DIM switch (only spotlights)	4		
				MOUNTING	8
				spotlight left	B
				spotlight right	C



LINEA 2 spotlights wall

TUNABLE
WHITECRI
≥ 90

220-240 V

DALI
1ADDR.


X-PERT

X-PERT

OPAL / OPAL | 2 SPOTLIGHTS CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	SYSTEM	ORDER CODE
35.0 W	1410 mm	3000 K	↓1760/↑1720 lm	99 lm/W	0 5 8 - 6 1 7 4 5 D H
		4000 K	↓1940/↑1900 lm	110 lm/W	0 5 8 - 6 1 7 4 6 D H
42.0 W	1410 mm	tunable w.	↓2020/↑2020 lm	96 lm/W	0 5 8 - 6 1 7 4 D D H
70.0 W	2610 mm	3000 K	↓3490/↑3490 lm	100 lm/W	0 5 8 - 6 1 7 8 5 D H
		4000 K	↓3850/↑3850 lm	110 lm/W	0 5 8 - 6 1 7 8 6 D H
83.0 W	2610 mm	tunable w.	↓4030/↑4030 lm	97 lm/W	0 5 8 - 6 1 7 8 D D H

spotlights 2 x 2,6 W / 159 lm only with 3000K



Order options

CONTROL

non DIM / ON OFF switch (only spotlights)	1 2
DALI-2	3
DALI-2 / DIM switch (only spotlights)	4

CONTROL

DALI-2	2 3
DALI-2 / DIM switch (only spotlights)	4

COLOUR

pure white RAL 9010	7
jet black RAL 9005	8

SNS Headquarters, Moscow

Russland

Architekt

Fedor Raschevsky, Peter
Kholkovsky

Lighting Design

Sergey Ananiev

Fotograf

Light&Design



Verwendete Produkte



LINEA



MINIMAL 100
trimless system



LINEA system

