



SASSO 60/100 round

suspended

EN Cylindrical spotlight made of aluminium, available in 2 sizes; light inset lacquered; housing powder coated; pendant fitting with cable suspension; incl. feed (black or white); can be individually shortened; precise radiation characteristic due to high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy


DE Zylindrischer Strahler aus Aluminium in 2 Größen; Lichteinsatz lackiert; Gehäuse pulverbeschichtet; abgependelt mit Seilabhangung; inkl. Einspeiseleitung (schwarz oder wei); beliebig kurzbar; prazise Abstrahlcharakteristik durch hochwertige Linsenoptik; COB (Chip on Board) Technologie fur hochste Effizienz; keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe; Baldachin fur Weiterverdrahtung; Konverter im Baldachin enthalten

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90, 2 SDCM
 SASSO 60 up to 94 lm/W
 SASSO 100 up to 98 lm/W
 L80 @ 50000 h
 non DIM, DALI-2

Types

suspended

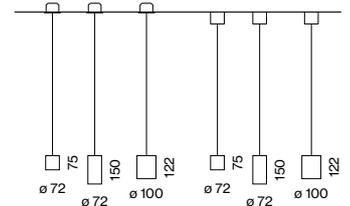

Housing colours




Inset colours



Light distributions

SASSO 60



SASSO 100



glare control
 (UGR ≤ 16)



easy mounting;
 no visible screws



CRI ≥ 95
 2 SDCM

Order options

HOUSING HEIGHT

75 mm	L	2
150 mm		7

COLOUR TEMPERATURE

SASSO 60	••	
2700 K		9
3000 K		0
3500 K		2
4000 K		1

COLOUR TEMPERATURE

SASSO 100	••	
2700 K		4
3000 K		5
4000 K		6

CONTROL

non DIM	◆	1
DALI-2		3

HOUSING COLOUR

<input type="radio"/> traffic white RAL 9016	■	7
<input checked="" type="radio"/> jet black RAL 9005		1

INSET COLOUR

<input type="radio"/> traffic white RAL 9016 (UGR \leq 22)	■	7
<input type="radio"/> matt silver (UGR \leq 19)		4
<input checked="" type="radio"/> jet black RAL 9005 (UGR \leq 16)		1
<input type="radio"/> gold dust RAL 260-M (UGR \leq 19)		9

BEAM ANGLE SASSO 60

spot 11°	▲	S
medium 21°		M
flood 42°		F
wide flood 54°		W

BEAM ANGLE SASSO 100

spot 19°	▲	S
medium 34°		M
flood 45°		F
wide flood 65°		W

Options on request

COLOUR RENDERING INDEX


CRI \geq 95, 2 SDCM

MOUNTING


recessed canopy

BEAM ANGLE SASSO 100

super wide flood 70°

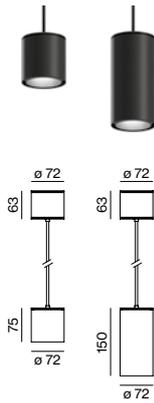


SASSO 60 round suspended




DOWNLIGHT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
10.2 W	2700 K	845 lm	0 4 8 - 3 1 L 0 •• ◆ ■ ▲
	3000 K	877 lm	
	3500 K	896 lm	
	4000 K	915 lm	



SASSO 100 round suspended



DOWNLIGHT

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
20.2 W	2700 K	1650 lm	0 4 8 - 3 4 2 0 •• ◆ ■ ▲
	3000 K	1790 lm	
	4000 K	1920 lm	

LUMINOUS FLUX value calculated for
CRI \geq 90, colour white, reflector wide flood