

# CONVERTER


007-1952580



Project / Type

Notes

Count / Date

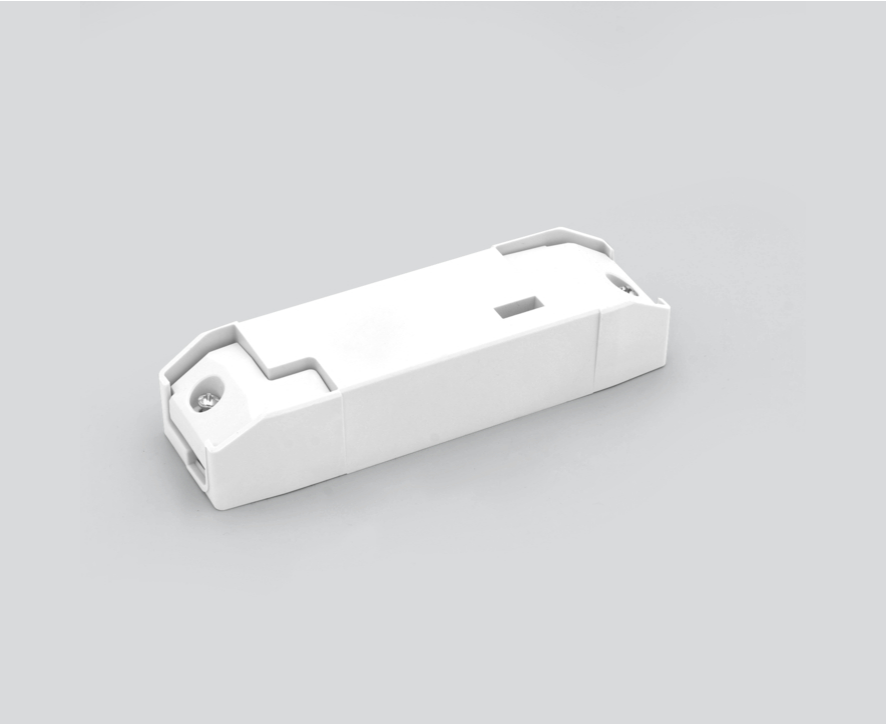

Electrical
PC2
38 W
Dim DALI, Dim Dali 2
min 198 V
max 264 V
η 90 %
Constant Current
min 50 Hz
max 60 Hz
constant current 500 mA

Physical
length 147 mm   width 44 mm   height 30 mm



# CONVERTER

007-1952580



Project / Type

Notes

Count / Date

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Converters
B10	31
B13	40
B16	50
B20	62
B25	78
C10	52
C13	67
C16	85
C20	104
C25	130

