

MOVE IT 25
050-011137



Notizen

Anzahl / Datum



Decke / Wand Track
schwenkbar max. 90°
Rotierbarkeit 360°
Verkehrsweiß RAL 9016 ¹
IP20
347 ² -429 ³ lm
Optischer Einsatz 83 ² -103 ³ lm/W ⁴


4000 K
CRI \geq 90
L80 / 50000 h
initial MacAdam \leq 2 SDCM
R _g : 98 R _r : 90 R _{t(1-15)} : 88
MR 0.8 MEF 0.72

focus | Ausstrahlwinkel $17^{\circ 2} - 43^{\circ 3}$
PstLM $\leq 1.0^{2 \ 3 \ 5}$ | SVM $\leq 0.4^{2 \ 3 \ 5}$

DALI-2 1 DALI Addr.
SK3 48 V
Einsatz 5.5 W
Optischer Einsatz 4.2 W

Durchmesser 32 mm | Höhe 73 mm
0.2 kg

Lichtverteilung

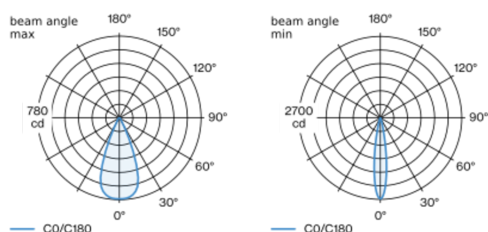


focus 43°

h (m)	E0° (lx)	ø (m)
1	772	0.80
2	193	1.59
3	86	2.39
4	48	3.18
5	31	3.98

focus 17°

h (m)	E0° (lx)	ø (m)
1	2680	0.30
2	670	0.59
3	300	0.89
4	170	1.19
5	110	1.49

Produktskizze



Montage- anleitung



¹ RAL Code ² kleinster Ausstrahlwinkel ³ größter Ausstrahlwinkel
⁴ inkl. Berücksichtigung von optischen Verlusten
⁵ Wert von umgebendem Produkt bei Vollast (ungedimmt)