




## Quickinfo

sensor  
ESSENTIAL, SENSE  
DALI-2

emergency light  
6500 K  
CRI  $\geq$  80  
200 lm  
L80 @ 50000 h  
non maintained

## Types

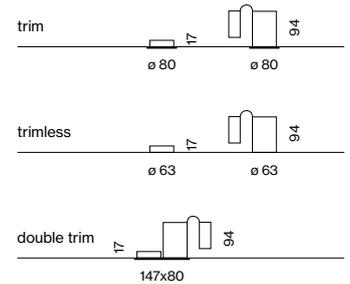

## Housing colours



## Inset colours



## Sensors



# SASSO 60 round sensor/emergency

recessed

**EN** Round inset (Emergency Light or Sensor); installation without tools in mounting set (trimless or with trim); surface lacquered; installation possible in different housings; LED emergency light inset: 3 variants with different test possibilities - Basic with test button, selftest with status LED or Pro DALI with monitoring via DALI; sensor with DALI-2 control: 2 variants - Basic with brightness and presence sensor or Pro with additional temperature, humidity, air quality and noise level measurement

**DE** Runder Einsatz (Notlicht bzw. Sensor); werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand); Oberfläche lackiert; Einbau in unterschiedlichen Gehäusen möglich; LED Notlicht-Einsatz: 3 Varianten mit verschiedenen Testmöglichkeiten - Basic mit Prüftaste, Selbsttest mit Status-LED oder Pro DALI mit Überwachung über DALI; Sensor mit DALI-2 Steuerung: 2 Varianten - Basic mit Helligkeits- und Anwesenheitssensor oder Pro mit zusätzlicher Temperatur-, Luftfeuchtigkeits-, Luftqualitäts- und Lärmpegelmessung

### Order options

#### INSET COLOUR

- traffic white RAL 9016 7
- jet black RAL 9005 1

#### BEAM ANGLE EMERGENCY LIGHT

- spot lens
- escape route lens
- anti panic lens



### Options on request

#### MOUNTING SET

- acoustic soft ceilings

#### INSET COLOUR

- grey, gold



### SASSO 60 sensor round



#### ESSENTIAL SENSOR

**TYPE** brightness & presence **ORDER CODE** 0 48 - 2 69 3 1 1



#### SENSE SENSOR

**TYPE** brightness, presence, temperature, sound pressure, humidity, CO<sub>2</sub> **ORDER CODE** 0 48 - 2 69 3 1 2

### SASSO 60 emergency light round



#### EMERGENCY 3h

**TYPE** BASIC | 2W **ORDER CODE** 0 48 - 2 69 3 2 1   
 SELF-TEST | 2W **ORDER CODE** 0 48 - 2 69 3 2 2   
 PRO DALI | 2W **ORDER CODE** 0 48 - 2 69 3 2 3

incl. 3 interchangeable lenses

### Electrical accessories

#### ACCUPACK

**TYPE** replacement accupack 3h **ORDER CODE** 0 48 - 2 69 3 9 1 0

### Mounting accessories

#### TRIMLESS MOUNTING SET for plasterboard ceilings 12.5/15/25 mm

**COLOUR**  traffic white RAL9016 **ORDER CODE** 0 48 - 2 69 6 1 1 7

#### MOUNTING SET WITH TRIM for intermediate ceilings 2-25 mm

TYPE	COLOUR	ORDER CODE
1 lamp	<input type="radio"/> traffic white RAL9016	0 48 - 2 69 6 3 1 7
	<input checked="" type="radio"/> jet black RAL 9005	0 48 - 2 69 6 3 1 8
2 lamps	<input type="radio"/> traffic white RAL9016	0 48 - 2 69 8 3 1 7
	<input checked="" type="radio"/> jet black RAL 9005	0 48 - 2 69 8 3 1 8

#### TRIMLESS MOUNTING SET for soft acoustic ceilings 25-40 mm

**COLOUR**  signal white RAL 9003 **ORDER CODE** 0 48 - 2 69 6 1 9 7

#### MOUNTING SET WITH TRIM for soft acoustic ceilings 25-40 mm

TYPE	COLOUR	ORDER CODE
1 lamp	<input type="radio"/> signal white RAL 9003	0 48 - 2 69 6 3 9 7
	<input checked="" type="radio"/> traffic black RAL 9017	0 48 - 2 69 6 3 9 8

#### MOUNTING TOOL for soft acoustic ceilings


**TYPE** SASSO 60 **COLOUR**  traffic black RAL 9017 **ORDER CODE** 0 48 - 2 69 5 9 1 8

#### CONCRETE MOUNTING HOUSING


COLOUR	L-W-H (mm)	ORDER CODE
exposed concrete ceilings	230-230-162	0 48 - 2 69 5 2 1 0
primed concrete ceilings*	614-307-120	0 48 - 2 69 5 1 1 0

\*order mounting set separately, not applicable for 2 lamps mounting set with trim


### Light distributions



emergency light  
spot lens



emergency light  
escape route lens



emergency light  
anti panic lens

