
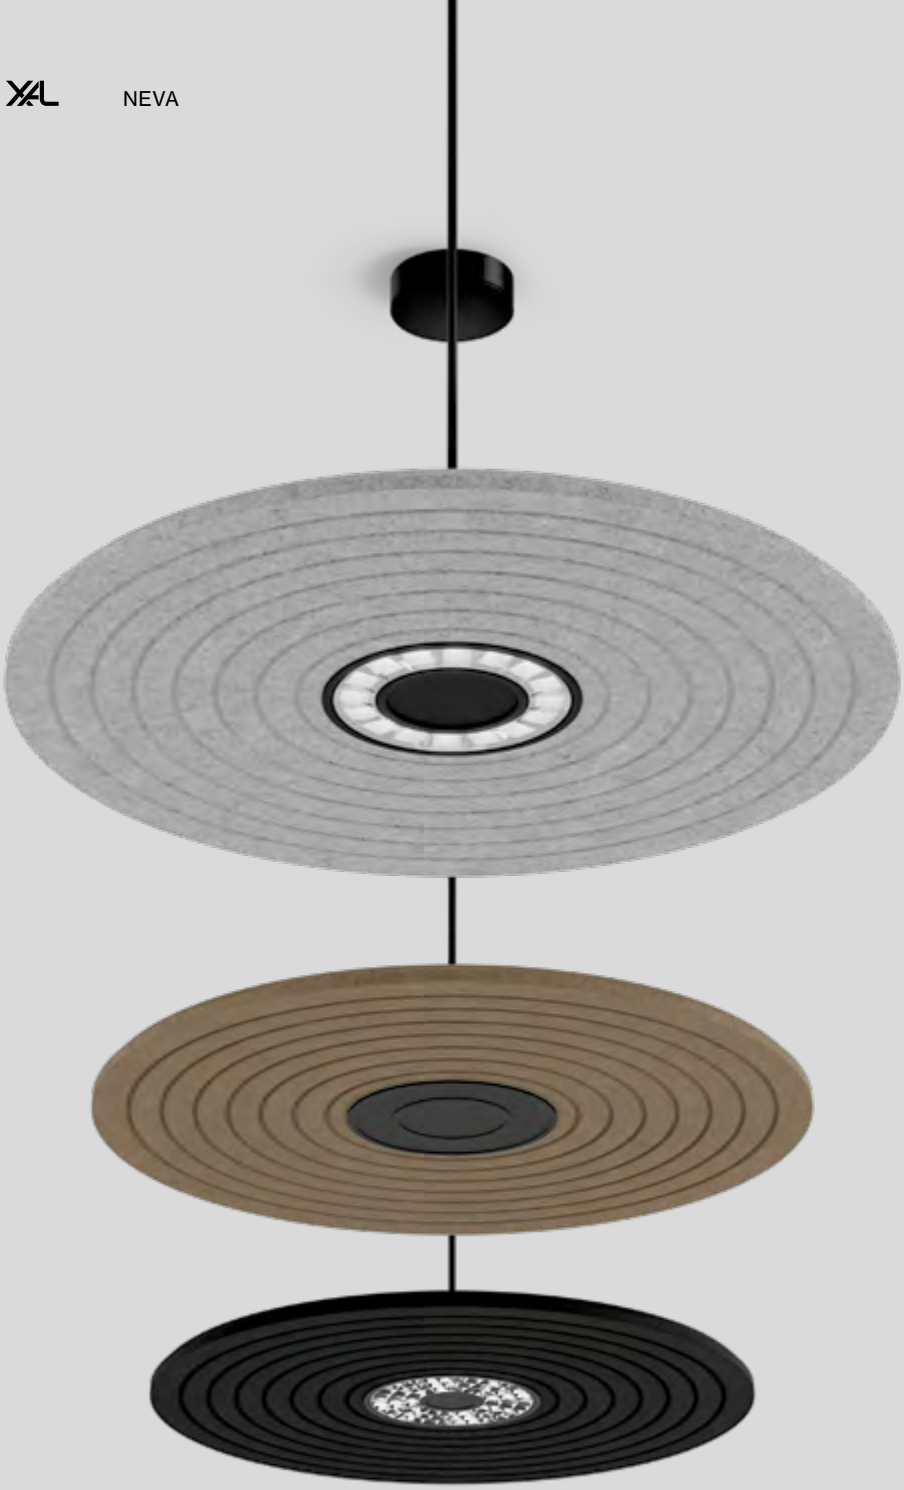


Quickinfo

PET felt
♻ from recycled material
up to absorption class A
suitable for workstations
flame retardant version available

3000 K, 4000 K
CRI ≥ 80, 3 SDCM
UGR ≤ 19 / 65° ≤ 1500 cd/m²
up to 161 lm/W
L95 @ 50 000 h
DALI-2, ESSENTIAL sensor
reflector, spotline

Types



Acoustic colours



Luminaire colours



Light distribution




NEVA disc


acoustic suspended

EN Acoustic element made of high quality, self-supporting, recycled PET felt with sound absorbing properties; round design; high quality visual and tactile surface with embossed pattern; absorption of direct sound and sound reflected from the ceiling; this creates high acoustic performance; pendant fitting with MITA circle 240 acoustic suspended (LUMINAIRE or BLIND SUSPENSION); optionally with sensor (ESSENTIAL)

DE Akustikelement aus hochwertigem, selbsttragendem, recyceltem PET-Filz mit schallabsorbierenden Eigenschaften; Bauform rund; optisch und haptisch hochwertige Oberfläche mit Musterprägung; Absorption des Direktschalls und des von der Decke reflektierten Schalls; dadurch hohe akustische Performance; abgependelt mit MITA circle 240 acoustic suspended (LUMINAIRE oder BLIND SUSPENSION); wahlweise mit Sensor (ESSENTIAL)



flat height
25 mm



embossed
acoustic panel




DIN EN 12464-1
UGR ≤ 19

Order options

ACOUSTIC COLOUR

white	W
marble grey	D
felt grey	G
anthracite	B
black	L
limestone	S

other colours on request



NEVA disc

PET felt | A B C D E, α_w 1.00 | 1.05 NRC | 1.02 SAA

TYPE	Ø·H (mm)	ORDER CODE
800 disc	754·25	091-321110
1200 disc	1182·25	091-321210

Acoustic data

Equivalent sound absorption area (A_{eq})

TYPE	125	250	500	1000	2000	4000 Hz
800 disc	0.15	0.38	0.50	0.50	0.50	0.50
1200 disc	0.34	0.85	1.13	1.13	1.13	1.13

Order options

COLOUR TEMPERATURE

3000 K	5
4000 K	6

CONTROL

DALI-2	3
DALI-2 ESSENTIAL sensor (brightness & presence)*	B

*DALI-2 application controller needed

MATERIAL COLOUR

traffic white RAL 9016	7
jet black RAL 9005	8

REFLECTOR COLOUR

chrome	R
dark chrome	B

SPOTLINE COLOUR


traffic white RAL 9016	7
jet black RAL 9005	8

LIGHT OPTIC

louver wide flood

spotline wide flood

LUMINOUS FLUX value calculated for colour white, reflector chrome



MITA circle 240 acoustic suspended

UGR ≤ 19 | cd/m² ≤1500 | DALI 1 ADDR. | 220-240V | X-PERT | X-PERT

LUMINAIRE LOUVER

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
13.7 W	3000 K	1940 lm	091-3180
	4000 K	2210 lm	
15 W	3000 K	2090 lm	091-3181
	4000 K	2380 lm	

LUMINAIRE SPOTLINE

SYSTEM POWER	COLOUR TEMP.	LUMINOUS FLUX	ORDER CODE
14.1 W	3000 K	2170 lm	091-3160 W
	4000 K	2310 lm	
16.9 W	3000 K	2550 lm	091-3161 W
	4000 K	2720 lm	

BLIND SUSPENSION

TYPE	ORDER CODE
240 round	091-319000

SYSTEM CONNECTOR

TYPE	ORDER CODE
set of two connectors	091-319100