


Types



Lichtverteilung




UNICO L2 / L3 basic

ceiling

EN Rectangular surface mounted multi-downlight made of aluminium; equipped with two (L2) / three (L3) individually selectable or prespecified, customised light elements; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering; clank-free

DE Rechteckiger Anbau-Multi-Downlight aus Aluminium; bestückt mit zwei (L2) / drei (L3) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; klirrfrei




black & chrome reflector



one luminaire multiple scenes




tunable white 2700 – 5000 K (optional)



UNICO L2 basic high efficient ceiling

CRI ≥ 90 · 2 SDCM · UGR ≤ 19 · cd/m² ≤ 3000 · 220-240 V · 1 ADDR. · X-PERT



FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1090 lm	110 lm/W	0 9 0 - 1 L 2 9 ◆ C ◪ ■ 1 1
	3000 K	1090 lm	110 lm/W	0 9 0 - 1 L 2 0 ◆ C ◪ ■ 1 1
	3500 K	1140 lm	115 lm/W	0 9 0 - 1 L 2 2 ◆ C ◪ ■ 1 1
	4000 K	1160 lm	117 lm/W	0 9 0 - 1 L 2 1 ◆ C ◪ ■ 1 1

WIDE FLOOD ROUND 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1120 lm	113 lm/W	0 9 0 - 1 L 2 9 ◆ D ◪ ■ 1 1
	3000 K	1120 lm	113 lm/W	0 9 0 - 1 L 2 0 ◆ D ◪ ■ 1 1
	3500 K	1170 lm	118 lm/W	0 9 0 - 1 L 2 2 ◆ D ◪ ■ 1 1
	4000 K	1190 lm	120 lm/W	0 9 0 - 1 L 2 1 ◆ D ◪ ■ 1 1

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1150 lm	116 lm/W	0 9 0 - 1 L 2 9 ◆ F ◪ ■ 1 1
	3000 K	1150 lm	116 lm/W	0 9 0 - 1 L 2 0 ◆ F ◪ ■ 1 1
	3500 K	1190 lm	120 lm/W	0 9 0 - 1 L 2 2 ◆ F ◪ ■ 1 1
	4000 K	1220 lm	123 lm/W	0 9 0 - 1 L 2 1 ◆ F ◪ ■ 1 1


WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.9 W	2700 K	1180 lm	119 lm/W	0 9 0 - 1 L 2 9 ◆ G ◪ ■ 1 1
	3000 K	1180 lm	119 lm/W	0 9 0 - 1 L 2 0 ◆ G ◪ ■ 1 1
	3500 K	1230 lm	124 lm/W	0 9 0 - 1 L 2 2 ◆ G ◪ ■ 1 1
	4000 K	1250 lm	126 lm/W	0 9 0 - 1 L 2 1 ◆ G ◪ ■ 1 1



UNICO L2 basic ceiling

CRI ≥ 90 · UGR ≤ 10 · cd/m² ≤ 1500 · 220-240 V · 1 ADDR. · X-PERT



SPOT ROUND 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	662 lm	53 lm/W	0 9 0 - 1 L 2 4 ◆ K ◪ 0 0 1
	3000 K	706 lm	56 lm/W	0 9 0 - 1 L 2 5 ◆ K ◪ 0 0 1
	4000 K	757 lm	60 lm/W	0 9 0 - 1 L 2 6 ◆ K ◪ 0 0 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

NARROW MEDIUM ROUND 22°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	673 lm	53 lm/W	0 9 0 - 1 L 2 4 ⇕ N ◪ 0 0 1
	3000 K	717 lm	57 lm/W	0 9 0 - 1 L 2 5 ⇕ N ◪ 0 0 1
	4000 K	769 lm	61 lm/W	0 9 0 - 1 L 2 6 ⇕ N ◪ 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	899 lm	71 lm/W	0 9 0 - 1 L 2 4 ⇕ B ◪ ■ 0 1
	3000 K	958 lm	76 lm/W	0 9 0 - 1 L 2 5 ⇕ B ◪ ■ 0 1
	4000 K	1030 lm	82 lm/W	0 9 0 - 1 L 2 6 ⇕ B ◪ ■ 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1030 lm	82 lm/W	0 9 0 - 1 L 2 4 ⇕ C ◪ ■ 0 1
	3000 K	1100 lm	87 lm/W	0 9 0 - 1 L 2 5 ⇕ C ◪ ■ 0 1
	4000 K	1180 lm	94 lm/W	0 9 0 - 1 L 2 6 ⇕ C ◪ ■ 0 1

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1020 lm	81 lm/W	0 9 0 - 1 L 2 4 ⇕ D ◪ ■ 0 1
	3000 K	1090 lm	87 lm/W	0 9 0 - 1 L 2 5 ⇕ D ◪ ■ 0 1
	4000 K	1170 lm	93 lm/W	0 9 0 - 1 L 2 6 ⇕ D ◪ ■ 0 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	884 lm	70 lm/W	0 9 0 - 1 L 2 4 ⇕ E ◪ ■ 0 1
	3000 K	942 lm	75 lm/W	0 9 0 - 1 L 2 5 ⇕ E ◪ ■ 0 1
	4000 K	1010 lm	80 lm/W	0 9 0 - 1 L 2 6 ⇕ E ◪ ■ 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1050 lm	83 lm/W	0 9 0 - 1 L 2 4 ⇕ F ◪ ■ 0 1
	3000 K	1120 lm	89 lm/W	0 9 0 - 1 L 2 5 ⇕ F ◪ ■ 0 1
	4000 K	1200 lm	95 lm/W	0 9 0 - 1 L 2 6 ⇕ F ◪ ■ 0 1

RECTANGULAR MEDIUM 34°x69°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	912 lm	72 lm/W	0 9 0 - 1 L 2 4 ⇕ R ◪ ■ 0 1
	3000 K	972 lm	77 lm/W	0 9 0 - 1 L 2 5 ⇕ R ◪ ■ 0 1
	4000 K	1040 lm	83 lm/W	0 9 0 - 1 L 2 6 ⇕ R ◪ ■ 0 1

Order options

CONTROL ⇕		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	1080 lm	86 lm/W	0 9 0 - 1 L 2 4 ◆ G ◪ ■ 0 1
	3000 K	1150 lm	91 lm/W	0 9 0 - 1 L 2 5 ◆ G ◪ ■ 0 1
	4000 K	1240 lm	98 lm/W	0 9 0 - 1 L 2 6 ◆ G ◪ ■ 0 1

WALLWASHER CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	914 lm	73 lm/W	0 9 0 - 1 L 2 4 ◆ A ◪ 0 0 1
	3000 K	974 lm	77 lm/W	0 9 0 - 1 L 2 5 ◆ A ◪ 0 0 1
	4000 K	1050 lm	83 lm/W	0 9 0 - 1 L 2 6 ◆ A ◪ 0 0 1

WALL FLOOR CORRIDOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	953 lm	76 lm/W	0 9 0 - 1 L 2 4 ◆ W ◪ ■ 0 1
	3000 K	1020 lm	81 lm/W	0 9 0 - 1 L 2 5 ◆ W ◪ ■ 0 1
	4000 K	1090 lm	87 lm/W	0 9 0 - 1 L 2 6 ◆ W ◪ ■ 0 1

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
12.6 W	2700 K	953 lm	76 lm/W	0 9 0 - 1 L 2 4 ◆ W ◪ ■ 0 2
	3000 K	1020 lm	81 lm/W	0 9 0 - 1 L 2 5 ◆ W ◪ ■ 0 2
	4000 K	1090 lm	87 lm/W	0 9 0 - 1 L 2 6 ◆ W ◪ ■ 0 2




UNICO L3 basic high efficient ceiling



FLOOD ROUND 46°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1640 lm	113 lm/W	0 9 0 - 1 L 3 9 ◆ C ◪ ■ 1 1
	3000 K	1640 lm	113 lm/W	0 9 0 - 1 L 3 0 ◆ C ◪ ■ 1 1
	3500 K	1710 lm	118 lm/W	0 9 0 - 1 L 3 2 ◆ C ◪ ■ 1 1
	4000 K	1740 lm	120 lm/W	0 9 0 - 1 L 3 1 ◆ C ◪ ■ 1 1



WIDE FLOOD ROUND 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1680 lm	116 lm/W	0 9 0 - 1 L 3 9 ◆ D ◪ ■ 1 1
	3000 K	1680 lm	116 lm/W	0 9 0 - 1 L 3 0 ◆ D ◪ ■ 1 1
	3500 K	1760 lm	121 lm/W	0 9 0 - 1 L 3 2 ◆ D ◪ ■ 1 1
	4000 K	1790 lm	123 lm/W	0 9 0 - 1 L 3 1 ◆ D ◪ ■ 1 1

Order options


CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

FLOOD SQUARE 54°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1720 lm	119 lm/W	0 9 0 - 1 L 3 9 ◆ F ◪ ■ 1 1
	3000 K	1720 lm	119 lm/W	0 9 0 - 1 L 3 0 ◆ F ◪ ■ 1 1
	3500 K	1790 lm	123 lm/W	0 9 0 - 1 L 3 2 ◆ F ◪ ■ 1 1
	4000 K	1830 lm	126 lm/W	0 9 0 - 1 L 3 1 ◆ F ◪ ■ 1 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
14.5 W	2700 K	1770 lm	122 lm/W	0 9 0 - 1 L 3 9 ◆ G ◪ ■ 1 1
	3000 K	1770 lm	122 lm/W	0 9 0 - 1 L 3 0 ◆ G ◪ ■ 1 1
	3500 K	1840 lm	127 lm/W	0 9 0 - 1 L 3 2 ◆ G ◪ ■ 1 1
	4000 K	1880 lm	130 lm/W	0 9 0 - 1 L 3 1 ◆ G ◪ ■ 1 1




UNICO L3 basic ceiling

CRI ≥ 90 · UGR ≤ 10 · cd/m² ≤ 1500 · 220-240 V · DALI 1 ADDR. · X-PERT

SPOT ROUND 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	993 lm	55 lm/W	0 9 0 - 1 L 3 4 ◆ K ◪ 0 0 1
	3000 K	1060 lm	59 lm/W	0 9 0 - 1 L 3 5 ◆ K ◪ 0 0 1
	4000 K	1140 lm	64 lm/W	0 9 0 - 1 L 3 6 ◆ K ◪ 0 0 1



NARROW MEDIUM ROUND 22°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1010 lm	56 lm/W	0 9 0 - 1 L 3 4 ◆ N ◪ 0 0 1
	3000 K	1080 lm	60 lm/W	0 9 0 - 1 L 3 5 ◆ N ◪ 0 0 1
	4000 K	1150 lm	64 lm/W	0 9 0 - 1 L 3 6 ◆ N ◪ 0 0 1

MEDIUM ROUND 33°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1350 lm	75 lm/W	0 9 0 - 1 L 3 4 ◆ B ◪ ■ 0 1
	3000 K	1440 lm	80 lm/W	0 9 0 - 1 L 3 5 ◆ B ◪ ■ 0 1
	4000 K	1540 lm	86 lm/W	0 9 0 - 1 L 3 6 ◆ B ◪ ■ 0 1

FLOOD ROUND 49°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1550 lm	87 lm/W	0 9 0 - 1 L 3 4 ◆ C ◪ ■ 0 1
	3000 K	1650 lm	92 lm/W	0 9 0 - 1 L 3 5 ◆ C ◪ ■ 0 1
	4000 K	1770 lm	99 lm/W	0 9 0 - 1 L 3 6 ◆ C ◪ ■ 0 1

Order options

CONTROL ◆		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		

WIDE FLOOD ROUND 72°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1540 lm	86 lm/W	0 9 0 - 1 L 3 4 ⇕ D ◪ ■ 0 1
	3000 K	1640 lm	92 lm/W	0 9 0 - 1 L 3 5 ⇕ D ◪ ■ 0 1
	4000 K	1760 lm	98 lm/W	0 9 0 - 1 L 3 6 ⇕ D ◪ ■ 0 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1330 lm	74 lm/W	0 9 0 - 1 L 3 4 ⇕ E ◪ ■ 0 1
	3000 K	1410 lm	79 lm/W	0 9 0 - 1 L 3 5 ⇕ E ◪ ■ 0 1
	4000 K	1520 lm	85 lm/W	0 9 0 - 1 L 3 6 ⇕ E ◪ ■ 0 1

FLOOD SQUARE 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1580 lm	88 lm/W	0 9 0 - 1 L 3 4 ⇕ F ◪ ■ 0 1
	3000 K	1680 lm	94 lm/W	0 9 0 - 1 L 3 5 ⇕ F ◪ ■ 0 1
	4000 K	1800 lm	101 lm/W	0 9 0 - 1 L 3 6 ⇕ F ◪ ■ 0 1

WIDE FLOOD SQUARE 71°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1620 lm	91 lm/W	0 9 0 - 1 L 3 4 ⇕ G ◪ ■ 0 1
	3000 K	1730 lm	97 lm/W	0 9 0 - 1 L 3 5 ⇕ G ◪ ■ 0 1
	4000 K	1850 lm	103 lm/W	0 9 0 - 1 L 3 6 ⇕ G ◪ ■ 0 1

WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.9 W	2700 K	1370 lm	77 lm/W	0 9 0 - 1 L 3 4 ⇕ A ◪ 0 0 1
	3000 K	1460 lm	82 lm/W	0 9 0 - 1 L 3 5 ⇕ A ◪ 0 0 1
	4000 K	1570 lm	88 lm/W	0 9 0 - 1 L 3 6 ⇕ A ◪ 0 0 1


Order options

CONTROL ⇕		COLOUR ◪		REFLECTOR ■	
non DIM	1	gold dust RAL 260-M	9	chrome	0
DALI-2	3	jet black RAL 9005	B	black	B
		white aluminium RAL 9006	G		
		traffic white RAL 9016	W		


Planning Information

L2 CEILING


SPOT ROUND




NARROW MEDIUM ROUND




MEDIUM ROUND




FLOOD ROUND




WIDE FLOOD ROUND




MEDIUM SQUARE




FLOOD SQUARE




WIDE FLOOD SQUARE




RECTANGULAR MEDIUM



WALLWASHER




WALL FLOOR CORRIDOR



2x wallwasher floor


WALL + FLOOR




2x wallwasher floor

L3 CEILING


SPOT ROUND




NARROW MEDIUM ROUND




MEDIUM ROUND




FLOOD ROUND




WIDE FLOOD ROUND




MEDIUM SQUARE



FLOOD SQUARE



WIDE FLOOD SQUARE



WALLWASHER




Office S3 ArchitectaOffice S3 Architecten, Mechelenn

Belgien

Architekt
S3 Architecten

Fotograf
Kris Dekeijser

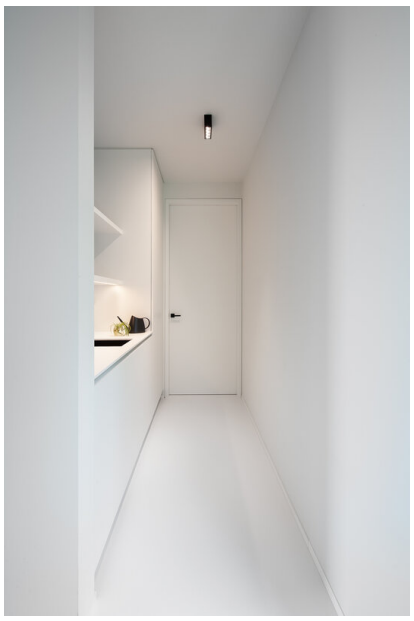

Verwendete Produkte



MOVE IT 25 surface / suspended system



JUST 45 MOVE IT 25 / 25 S / 45



SPOTLINE MOVE IT 25



TULA suspended



MOVE IT 45 surface / suspended system



L10 OFFICE MOVE IT 45




UNICO L2 / L3 ceiling



UNICO L4 / L6 ceiling

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



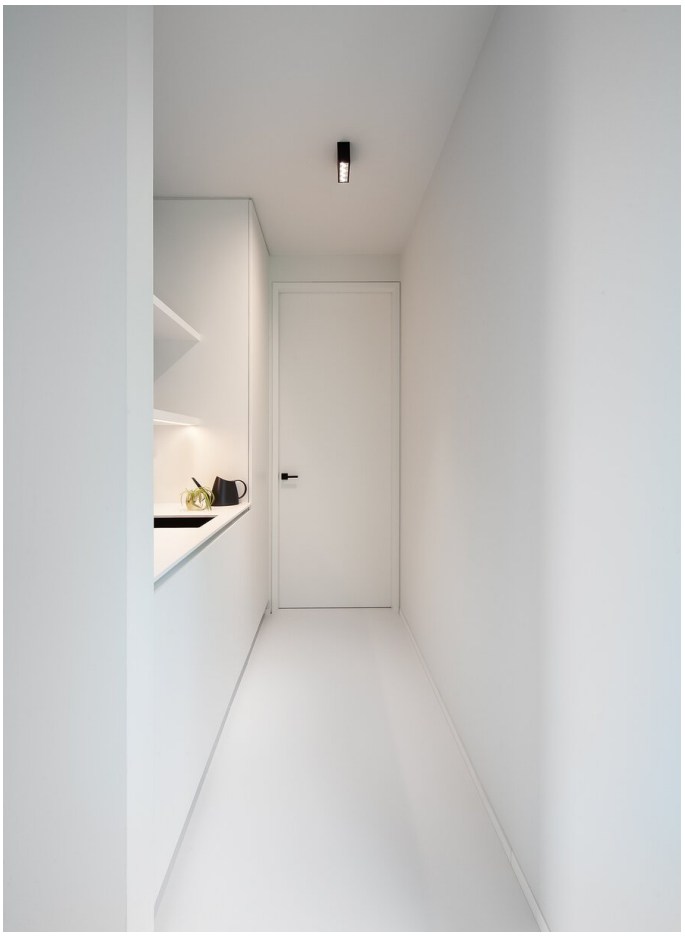








S3a





