

SASSO 60 round

ceiling


EN Cylindrical ceiling mounted spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; luminaire housing can be attached to mounting plate without tools by interlock; choice of adjustable symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise due to high quality lens system; with different beam angles; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminum-vaporised surface; COB (Chip on Board) technology for maximum efficiency (ADJUSTABLE); no multiple shadows; efficient LEDs with very good colour rendering; converter integrated into spotlight head

DE Zylindrischer Deckenanbaustrahler aus Aluminium; Oberfläche Lichteinsatz lackiert; Oberfläche Gehäuse pulverbeschichtet; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; wahlweise einstellbar symmetrische oder asymmetrische Abstrahlcharakteristik; symmetrisch strahlende Varianten: präzise durch hochwertige Linsenoptik; mit verschiedenen Ausstrahlwinkeln; asymmetrische strahlende Varianten: hochwertiger Reflektor mit mikrofacetierter, aluminiumbedampfter Oberfläche; COB (Chip on Board) Technologie für höchste Effizienz (ADJUSTABLE); keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe; Konverter im Strahlerkopf integriert

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM (initial MacAdam)
 UGR ≤ 10, UGR ≤ 13, UGR ≤ 16, UGR ≤ 19
 bis zu 101 lm/W
 L80 / 50000 h, L85 / 50000 h
 DALI-2, nicht dimmbar
 IP20

Types



Farbe



Innenfarbe



Lichtverteilung



wallwasher and wallwasher floor inset



glare control (UGR ≤ 16)



easy mounting no visible screws



Colour Warm Dimming 1800 – 3000 K (optional)



CRI ≥ 95 2 SDCM (optional)



SASSO 60 round adjustable ceiling



SPOT 15°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	735 lm	71 lm/W	0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3000 K	759 lm	73 lm/W	0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	3500 K	775 lm	75 lm/W	0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S
	4000 K	799 lm	77 lm/W	0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> S

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.

MEDIUM 27°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	874 lm	86 lm/W	0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3000 K	907 lm	89 lm/W	0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	3500 K	927 lm	91 lm/W	0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M
	4000 K	946 lm	93 lm/W	0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> M

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD 40°-41°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	831 lm	81 lm/W	0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3000 K	862 lm	85 lm/W	0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	3500 K	880 lm	86 lm/W	0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F
	4000 K	899 lm	88 lm/W	0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> F

The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD 56°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.2 W	2700 K	876 lm	86 lm/W	0 4 8 - 3 1 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3000 K	909 lm	89 lm/W	0 4 8 - 3 1 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3500 K	928 lm	91 lm/W	0 4 8 - 3 1 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	4000 K	948 lm	93 lm/W	0 4 8 - 3 1 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.

Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	<input type="checkbox"/>	jet black RAL 9005	<input checked="" type="checkbox"/>	jet black RAL 9005	<input type="checkbox"/>
DALI-2	<input checked="" type="checkbox"/>	traffic white RAL 9016	<input type="checkbox"/>	matt silver	<input type="checkbox"/>
				traffic white RAL 9016	<input type="checkbox"/>
				gold dust RAL 260-M	<input type="checkbox"/>



SASSO 60 round wallwasher ceiling



WALLWASHER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	1000 lm	96 lm/W	0 4 8 - 3 7 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A
	3000 K	944 lm	91 lm/W	0 4 8 - 3 7 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A
	3500 K	983 lm	95 lm/W	0 4 8 - 3 7 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A
	4000 K	944 lm	91 lm/W	0 4 8 - 3 7 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> A

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour matt silver, traffic white.



SASSO 60 round wallwasher/floor ceiling



WALLWASHER FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
10.4 W	2700 K	1050 lm	101 lm/W	0 4 8 - 3 7 1 0 9 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3000 K	985 lm	95 lm/W	0 4 8 - 3 7 1 0 0 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	3500 K	1030 lm	99 lm/W	0 4 8 - 3 7 1 0 2 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W
	4000 K	985 lm	95 lm/W	0 4 8 - 3 7 1 0 1 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> W



Order options

CONTROL		COLOUR		INNER COLOUR	
non DIM	1	jet black RAL 9005	1	jet black RAL 9005	1
DALI-2	3	traffic white RAL 9016	7	matt silver	4
				traffic white RAL 9016	7
				gold dust RAL 260-M	9


The Silo, Copenhagen

Dänemark

Architekt
COBE Architects

Lighting Design
anker & co

Fotograf
Kris Dekeijser

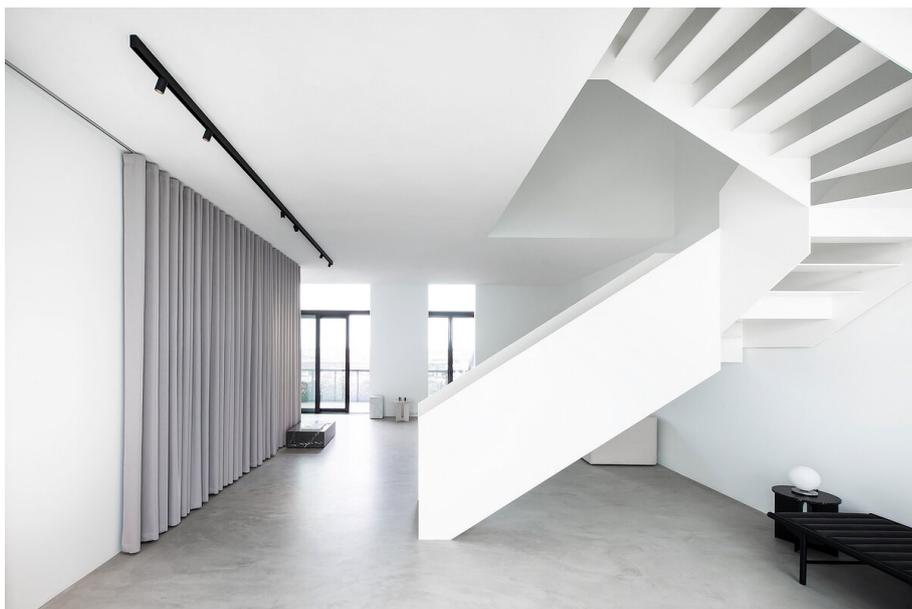

Verwendete Produkte



SASSO 60 round ceiling





MOVE IT 25 surface / suspended system



JUST 45 MOVE IT 25 / 25 S / 45



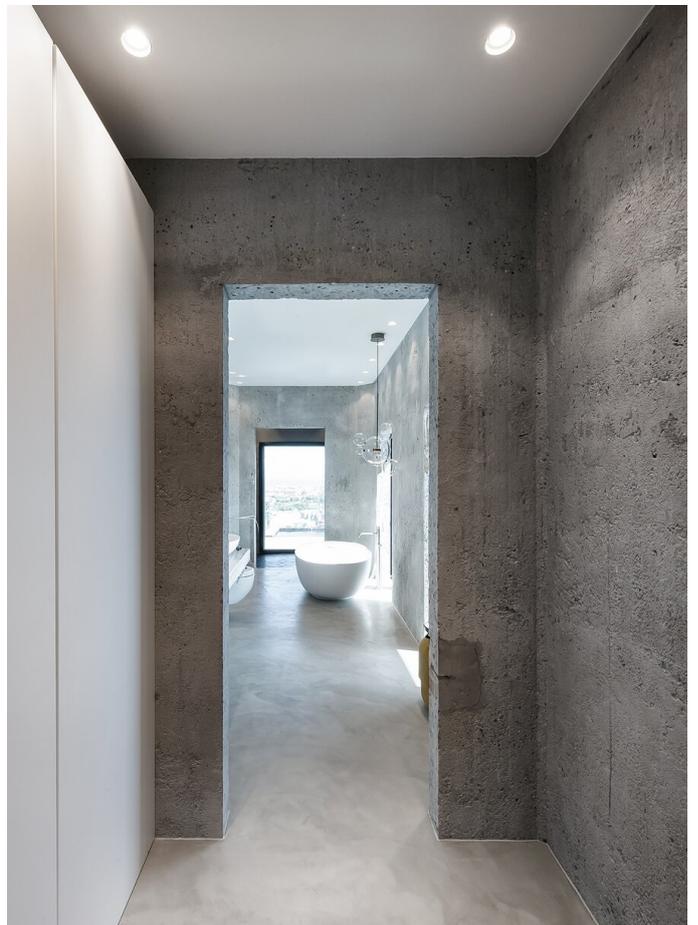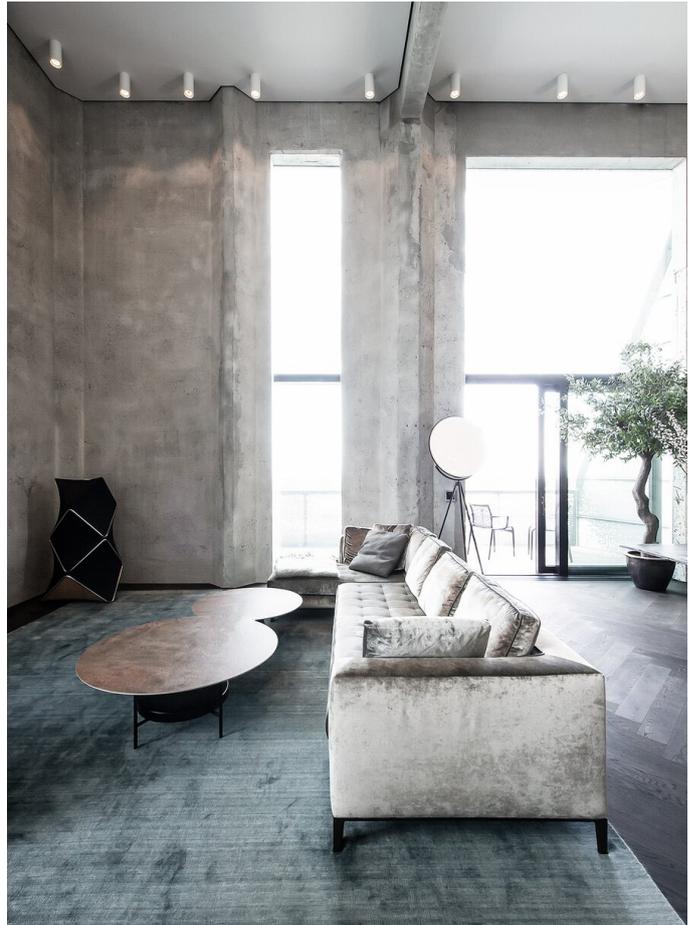



Bank Raiffeisen, Aigle

Schweiz

Architekt

: ABA PARTENAIRES SA

Fotograf

Julie Masson



Verwendete Produkte



SASSO 60 round ceiling



INO circle suspended ceiling

