


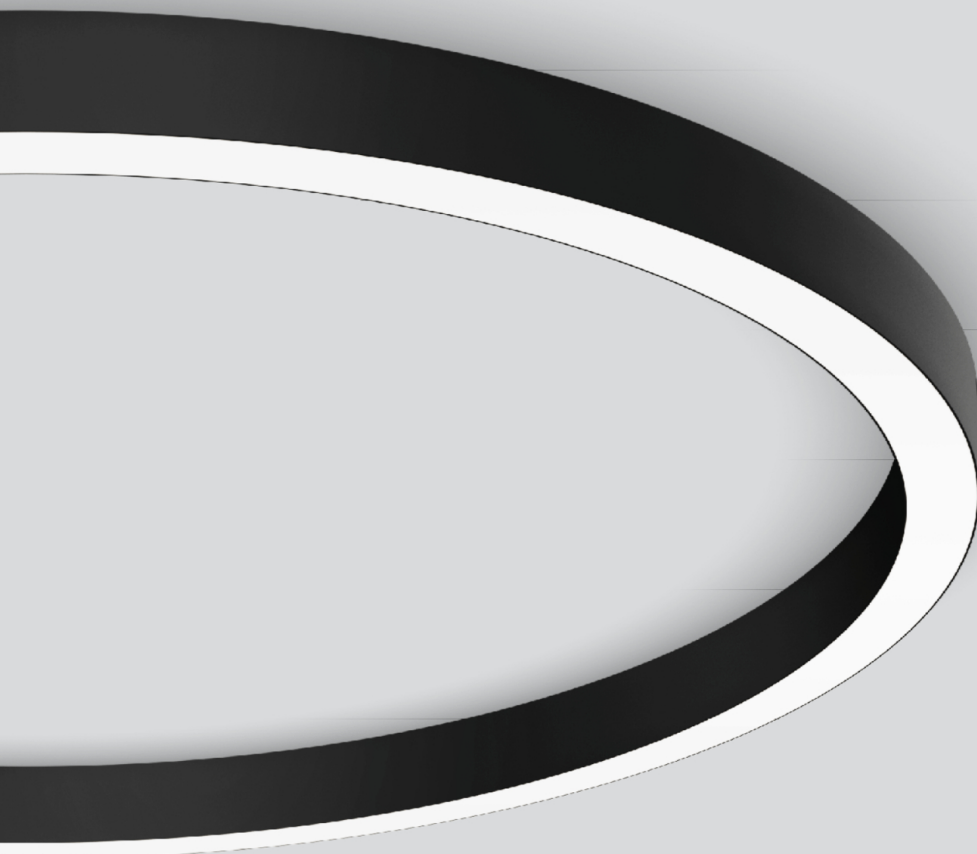

MINO 60 CIRCLE

ceiling


EN Ring shaped luminaire housing from rolled aluminium extruded profile, seamlessly welded; surface powder coated; light inset consisting of highly reflective coated die-cast aluminium for improved thermal management; opal cover for uniform illumination; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; sound absorbing elements available; energy-efficient LEDs with very good colour rendering

DE Ringförmiger Leuchtenkörper aus gerolltem Aluminiumstrangpressprofil nahtlos verschweißt; Oberfläche pulverbeschichtet; Lichteinsatz bestehend aus hochreflektierend lackiertem Aluminiumdruckguss für verbessertes Thermomanagement; opale Abdeckung für homogene Ausleuchtung; mikroprismatische PMMA-Abdeckung inkl. Diffusorfolie zur Reduktion der Leuchtdichte bei homogener Ausleuchtung; schallabsorbierende Elemente erhältlich; energieeffiziente LEDs mit sehr guter Farbwiedergabe

Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
bis zu 144 lm/W
L90 / 75000 h
Abdeckung: Microprismatic, Opal
DALI-2
IP20

Types




Farben



Lichtverteilung



DiiA® standards
251, 252, 253



microprismatic



acoustic
elements




MINO 60 CIRCLE 1000 ceiling



OPAL | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
53.0 W	3000 K	7020 lm	132 lm/W	0 3 4 - 2 1 1 2 5 3 ☒ H
	4000 K	7480 lm	141 lm/W	0 3 4 - 2 1 1 2 6 3 ☒ H



MICROPRISMATIC | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
53.0 W	3000 K	6100 lm	115 lm/W	0 3 4 - 2 1 1 2 5 3 ☒ Z
	4000 K	6500 lm	123 lm/W	0 3 4 - 2 1 1 2 6 3 ☒ Z




MINO 60 CIRCLE 1500 ceiling



OPAL | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
88.0 W	3000 K	11200 lm	127 lm/W	0 3 4 - 2 1 1 0 5 3 ☒ H
	4000 K	12000 lm	136 lm/W	0 3 4 - 2 1 1 0 6 3 ☒ H




MICROPRISMATIC | DIRECT CRI ≥ 80, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
88.0 W	3000 K	9760 lm	111 lm/W	0 3 4 - 2 1 1 0 5 3 ☒ Z
	4000 K	10400 lm	118 lm/W	0 3 4 - 2 1 1 0 6 3 ☒ Z




MINO 60 CIRCLE 3000 ceiling



OPAL | DIRECT pure white, CRI ≥ 80, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
167.0 W	3000 K	22600 lm	135 lm/W	0 3 4 - 2 1 1 4 5 3 7 H
	4000 K	24100 lm	144 lm/W	0 3 4 - 2 1 1 4 6 3 7 H

other configurations see MINO 60 CURVE system



Order options

COLOUR	☒	COLOUR
white aluminium RAL 9006	G	marble grey RAL 7047
special colours	X	limestone RAL 070 70 20
pure white RAL 9010	7	anthracite RAL 7021
jet black RAL 9005	8	felt grey RAL 7037




MINO 60 CIRCLE 6000 ceiling



OPAL | DIRECT pure white, CRI ≥ 80, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
334.0 W	3000 K	45200 lm	135 lm/W	0 3 4 - 2 1 1 6 5 3 7 H
	4000 K	48100 lm	144 lm/W	0 3 4 - 2 1 1 6 6 3 7 H

other configurations see MINO 60 CURVE system




Acoustic accessories (optional)

MINO CIRCLE ACOUSTIC 1000 inlay



COLOUR	Ø-H (mm)	ORDER CODE
marble grey	937-24	0 3 4 - 2 7 0 1 1 1 D
black	937-24	0 3 4 - 2 7 0 1 1 1 L
white	937-24	0 3 4 - 2 7 0 1 1 1 W
limestone	937-24	0 3 4 - 2 7 0 1 1 1 S
anthracite	937-24	0 3 4 - 2 7 0 1 1 1 B
felt grey	937-24	0 3 4 - 2 7 0 1 1 1 G

MINO CIRCLE ACOUSTIC 1500 inlay



COLOUR	Ø-H (mm)	ORDER CODE
marble grey	1434-24	0 3 4 - 2 7 0 2 1 1 D
black	1434-24	0 3 4 - 2 7 0 2 1 1 L
white	1434-24	0 3 4 - 2 7 0 2 1 1 W
limestone	1434-24	0 3 4 - 2 7 0 2 1 1 S
anthracite	1434-24	0 3 4 - 2 7 0 2 1 1 B
felt grey	1434-24	0 3 4 - 2 7 0 2 1 1 G

Order options

COLOUR		COLOUR	
white aluminium RAL 9006	G	marble grey	RAL 7047
special colours	X	limestone	RAL 070 70 20
pure white RAL 9010	7	anthracite	RAL 7021
jet black RAL 9005	8	felt grey	RAL 7037

PLANDAY COPENHAGEN

Dänemark

Lighting Design
Anker & Co

Fotograf
Kris Dekeijser



Verwendete Produkte



MINO 60 CIRCLE
ceiling



MINO CIRCLE
acoustic inlay

