


Quickinfo

3000 K, 4000 K
CRI ≥ 80, CRI ≥ 90 / 3 SDCM (initial MacAdam)
bis zu 3.280 lm/m
bis zu 142 lm/W
L90 / 50000 h
Abdeckung: Clear Cover, Opal
DALI-2
IP20

Types



Farben



Lichtverteilung



TUBO 60

suspended

EN Supporting profile in extruded aluminium; end cap in aluminium; surface raw or powder coated; suspended luminaire with cable suspension; height adjustment without tools; incl. feeder cable; light control via high quality lens system for maximum, homogeneous illumination; optionally cylindr. opal cover or clear, cylindrical cover with linear prismatic optic; energy-efficient LEDs with very good colour rendering

DE Tragprofil aus Aluminiumstrangpressprofil; Enddeckel aus Aluminium; Oberfläche roh oder pulverbeschichtet; Pendelleuchte mit Seilabhängung; werkzeuglose Höhenverstellung; inkl. Einspeiseleitung; Lichtlenkung mittels hochwertiger Linsenoptik für maximale, homogene Ausleuchtung; wahlweise zylindr. opale Abdeckung, oder klare, zylindrische Abdeckung mit Linearprismenoptik; energieeffiziente LEDs mit sehr guter Farbwiedergabe




driver integrated



system solution




uniform illumination



TUBO 60 opal suspended

CRI ≥90 · 220-240 V · 1 ADDR. · X-PERT · X-PERT




OPAL DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
13.9 W	625 mm	3000 K	80	1700 lm	122 lm/W	058-321253O
			90	1480 lm	106 lm/W	058-321203O
		4000 K	80	1810 lm	130 lm/W	058-321263O
			90	1480 lm	106 lm/W	058-321213O
27.9 W	1210 mm	3000 K	80	3400 lm	122 lm/W	058-321453O
			90	2960 lm	106 lm/W	058-321403O
		4000 K	80	3620 lm	130 lm/W	058-321463O
			90	2960 lm	106 lm/W	058-321413O
34.0 W	1500 mm	3000 K	80	4220 lm	124 lm/W	058-321553O
			90	3670 lm	108 lm/W	058-321503O
		4000 K	80	4490 lm	132 lm/W	058-321563O
			90	3670 lm	108 lm/W	058-321513O
54.0 W	2375 mm	3000 K	80	6740 lm	125 lm/W	058-321853O
			90	5870 lm	109 lm/W	058-321803O
		4000 K	80	7170 lm	133 lm/W	058-321863O
			90	5870 lm	109 lm/W	058-321813O



TUBO 60 ribbed suspended

CRI ≥90 · 220-240 V · 1 ADDR. · X-PERT · X-PERT



CLEAR COVER WITH LINEAR PRISMATIC OPTIC DALI-2

SYSTEM	LENGTH	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
13.9 W	625 mm	3000 K	80	1820 lm	131 lm/W	058-521253C
			90	1580 lm	114 lm/W	058-521203C
		4000 K	80	1940 lm	140 lm/W	058-521263C
			90	1580 lm	114 lm/W	058-521213C
27.9 W	1210 mm	3000 K	80	3640 lm	130 lm/W	058-521453C
			90	3170 lm	114 lm/W	058-521403C
		4000 K	80	3870 lm	139 lm/W	058-521463C
			90	3170 lm	114 lm/W	058-521413C
34.0 W	1500 mm	3000 K	80	4510 lm	133 lm/W	058-521553C
			90	3930 lm	116 lm/W	058-521503C
		4000 K	80	4800 lm	141 lm/W	058-521563C
			90	3930 lm	116 lm/W	058-521513C
54.0 W	2375 mm	3000 K	80	7210 lm	134 lm/W	058-521853C
			90	6280 lm	116 lm/W	058-521803C
		4000 K	80	7680 lm	142 lm/W	058-521863C
			90	6280 lm	116 lm/W	058-521813C

Order options


COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8
aluminium raw	R

Office, Amsterdam


Niederlande

Architekt
MVSA Architecs

Fotograf
Kris Dekeijser

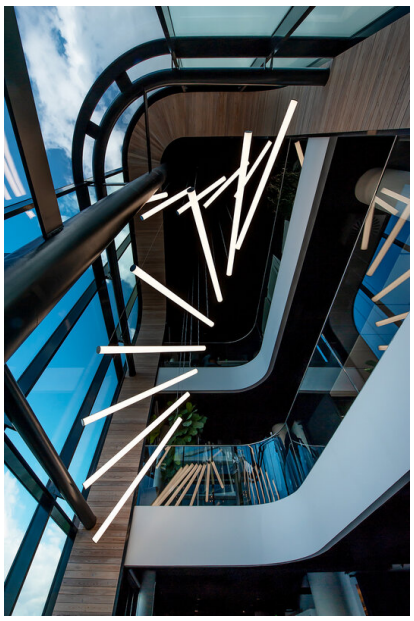

Verwendete Produkte



TUBO 60 suspended

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



