


Quickinfo

3500 K, tunable white 2700 - 5000 K
CRI ≥ 90, CRI ≥ 98 / 3 SDCM (initial MacAdam)
bis zu 58 lm/W
L80 / 50000 h, L85 / 50000 h
DALI-2
IP20

Types



Farben

Lichtverteilung

PABLO colour tune / tunable white

EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter in spotlight housing; COB (Chip on Board) technology or CSP (Chip-Scale-Packaging) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; high quality aluminium reflector with spherical facet finish; high-gloss anodised; precise radiation characteristic with different light distributions; installed and exchanged without tools; optical attachments as accessories; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, available as an accessory

DE Stromschienenstrahler aus Aluminiumdruckguss; Oberfläche pulverbeschichtet; 360° dreh- und 310° schwenkbar; Konverter im Strahlergehäuse; COB (Chip on Board) Technologie bzw. CSP (Chip-Scale-Packaging) Technologie für höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; hochwertiger Aluminiumreflektor mit sphärischer Facettenoptik; hochglänzend eloxiert; präzise Abstrahlcharakteristik mit unterschiedlichen Lichtverteilungen; werkzeuglos einsetz- bzw. austauschbar; optische Aufsätze als Zubehör; Adapter für werkzeugloses Einsetzen bzw. Verschieben in verschiedenen 3-Phasen Stromschienen; Adapter-Fixierung wahlweise werkzeuglos mittels Rändel- oder Feststellschraube (Schraubendreher erforderlich); Punktauslass, wahlweise in Anbaugehäuse bzw. Einbaugehäuse, als Zubehör erhältlich



compatible with MOVE IT PRO 45



DiiA® standards 251, 252, 253



360° rotatable, 310° tiltable



rotation lock



colour tune (3500 K red / blue)



tunable white 2700 – 5000 K




PABLO tunable white track

310° 360° | TUNABLE WHITE | CRI ≥98 | 220-240 V | DALI 2 ADDR. | X-PERT | X-PERT

MEDIUM 20°, 2700 - 5000 K, CRI ≥ 98, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
26.6 W	tunable w.	1140 lm	43 lm/W	1 8 0 - 5 6 ♁ 0 D 3 ◪ M



FLOOD 38°, 2700 - 5000 K, CRI ≥ 98, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
26.6 W	tunable w.	1080 lm	41 lm/W	1 8 0 - 5 6 ♁ 0 D 3 ◪ F

PABLO colour tune track

310° 360° | CRI ≥90 | 220-240 V | DALI 3 ADDR. | X-PERT | X-PERT

MEDIUM 24°, CRI ≥ 90, DALI-2


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
18.8 W	3500 K	1090 lm	58 lm/W	1 8 0 - 5 6 ♁ 0 G 3 ◪ M

FLOOD 38°, CRI ≥ 90, DALI-2

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
18.8 W	3500 K	1000 lm	53 lm/W	1 8 0 - 5 6 ♁ 0 G 3 ◪ F

Planning Information

Fresh colour for historical works of art

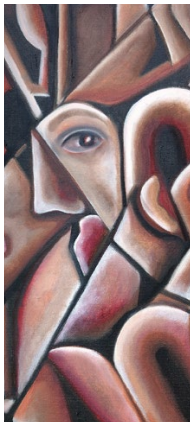



PABLO colour tune was developed to revitalise historical art, which is particularly worthy of protection, true to the original. An increased, individually adjustable red-blue saturation compensates for time-related colour damage – purely through the lighting. This reawakens the original colours of a work of art. The correct setting of PABLO colour tune can be easily controlled and adjusted via DALI-2.

Mounting accessories

RECESSED HOUSING / POINT OUTLET ceiling thickness, 1-30 mm

Ø·H (mm)	ORDER CODE
151·60	1 8 6 - 0 7 2 2 7 ◪

Order options

MOUNTING	♁	COLOUR	◪
set screw (tool required)	1	traffic white RAL 9016	7
tool-free fixation	2	jet black RAL 9005	8

SURFACE HOUSING / POINT OUTLET

Ø·H (mm)	ORDER CODE
120·32	186-07228

Optical accessories

HONEYCOMB LOUVER for BO 70 | PABLO

COLOUR	Ø·H (mm)	ORDER CODE
jet black	61·3	080-59000018

SNOOT

COLOUR	Ø·H (mm)	ORDER CODE
jet black	62·33	080-59000008

Order options

COLOUR	
traffic white RAL 9016	7
jet black RAL 9005	8