


## Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
bis zu 73 lm/W
L85 / 50000 h
DIM POTI
IP20

### Types




### Farben

### Lichtverteilung

# **PABLO** multilens

EN Track light made of die-cast aluminium; surface powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; exchangeable additional lenses; precise radiation characteristics with different beam angles; installed and exchanged without tools; optical attachments as accessories; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation optionally without tools by means of knurled screw or set screw (screwdriver required); point outlet, either in surface mounted housing or recessed housing, as an accessory

DE Stromschienenstrahler aus Aluminiumdruckguss; Oberfläche pulverbeschichtet; 360° dreh- und 310° schwenkbar; Konverter im Strahlergehäuse aus Aluminium verbaut; mit COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; austauschbare Vorsatzlinsen; präzise Abstrahlcharakteristik mit verschiedenen Ausstrahlwinkeln; werkzeuglos einsetz- bzw. austauschbar; optische Aufsätze als Zubehör; Adapter für werkzeugloses Einsetzen bzw. Verschieben in verschiedenen 3-Phasen Stromschienen; Adapter-Fixierung wahlweise werkzeuglos mittels Rändel- oder Feststellschraube (Schraubendreher erforderlich); Punktauslass, wahlweise in Anbaugehäuse bzw. Einbaugehäuse, als Zubehör



compatible with MOVE IT PRO 45




DiiA® standards 251, 252, 253



interchangeable diffusion sheets



360° rotatable, 310° tiltable



DIM POTI / rotation lock




## **PABLO** multilens track

310° 360° | CRI ≥ 90 | 2 SDCM | 220-240 V | X-PERT | X-PERT


**WIDE FLOOD / FLOOD / MEDIUM / SPOT / SUPER SPOT / OVAL** 10°-64°, CRI ≥ 90, DIM POTI

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 14.7 W | 3000 K | 1010 lm | 69 lm/W | 180-57ơ058 |
| | 4000 K | 1090 lm | 74 lm/W | 180-57ơ068 |

incl. 5 pcs. interchangeable diffusion sheets




## Planning Information

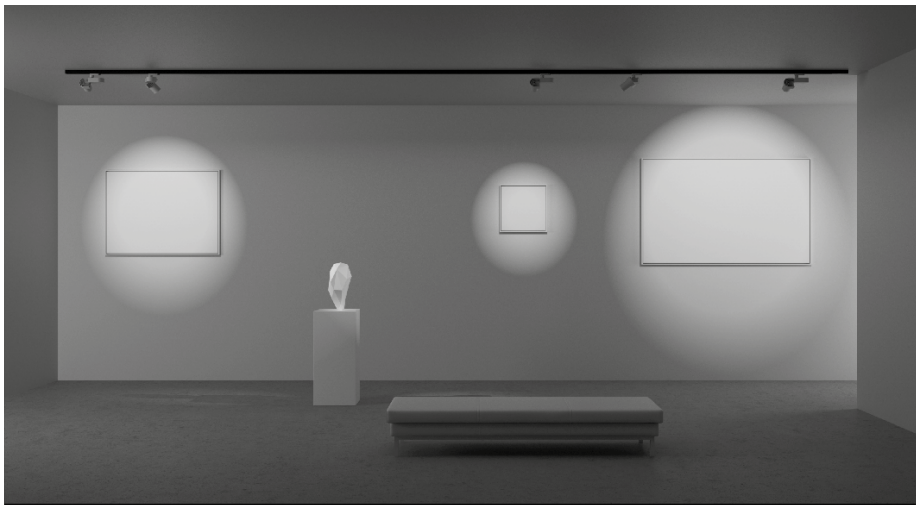

## Mounting accessories

**RECESSED HOUSING / POINT OUTLET** ceiling thickness, 1-30 mm

| Ø·H (mm) | ORDER CODE |
|---|---|
| 151·60 | 186-07227 |

**SURFACE HOUSING / POINT OUTLET**

| Ø·H (mm) | ORDER CODE |
|---|---|
| 120·32 | 186-07228 |

## Optical accessories

ø 48 | i

**DIFFUSION SHEET FOR SUPERSPOT**

| TYPE | ORDER CODE |
|---|---|
| for a better homogeneous illumination | 080-59000030 |

## Order options

| MOUNTING | ơ | COLOUR | |
|---|---|---|---|
| set screw (tool required) | 1 | traffic white RAL 9016 | 7 |
| tool-free fixation | 2 | jet black RAL 9005 | 8 |




**OVAL FILTER** 60 x 15°

**ORDER CODE**
080-5900020