
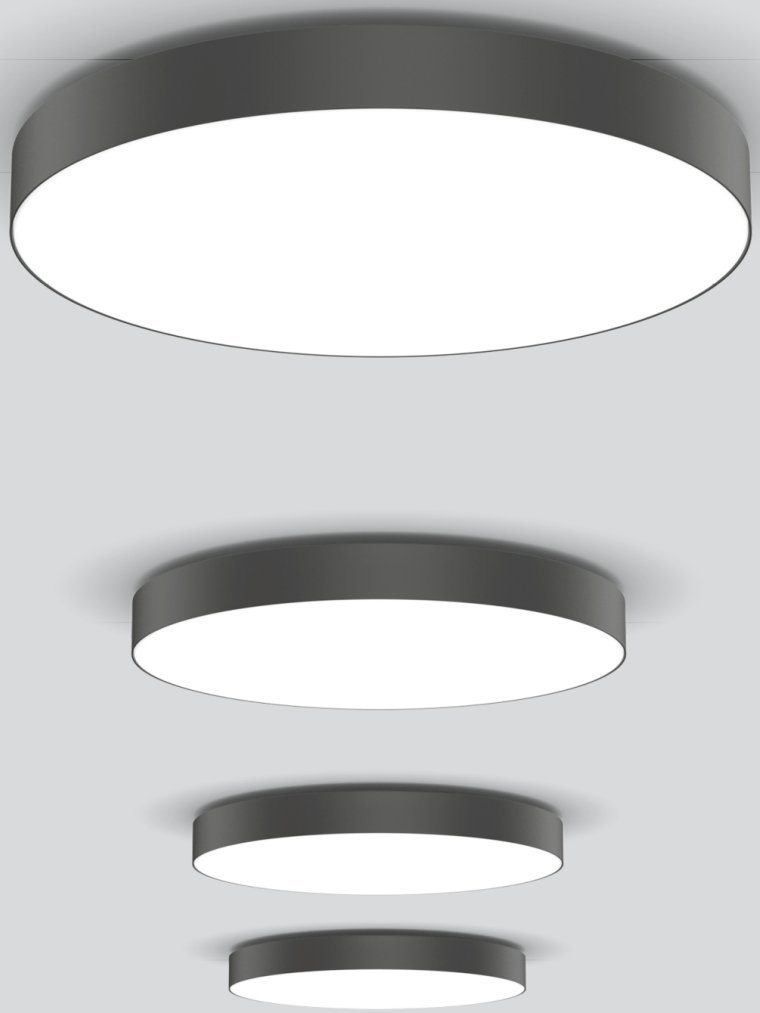


## Quickinfo

3000 K, 4000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
bis zu 136 lm/W
L85 / 50000 h
DALI-2, nicht dimmbar
Opal
IP54, IK07

### Types




### Farben



### Lichtverteilung



# **SONO LOOP** IP54

surface

EN Round luminaire housing in die-cast aluminium; surface powder coated; fitted bezel in rolled, seamless welded aluminium profile; suitable for wall or ceiling mounting; completely homogeneously illuminated, satinised PMMA cover; same luminance for all size versions; energy-efficient LEDs with very good colour rendering; luminaire with 2 cable openings and plug-in terminals for through wiring

DE Runder Leuchtenkörper aus Aluminiumdruckguss; Oberfläche pulverbeschichtet; aufgesetzter Ring aus gerolltem und nahtlos verschweißtem Aluminiumprofil; geeignet für Wand- oder Deckenmontage; absolut homogen ausgeleuchtete, satinierte PMMA-Abdeckung; gleiche Leuchtdichte bei allen Größenvarianten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Leuchte mit 2 Kabelöffnungen und Steckklemme für Weiterverdrahtung




DiiA® standards 251, 252, 253




easy mounting by click-mechanism



dust & insect protection (IP 54)



tunable white 2700 – 6500 K (optional)




## **SONO LOOP 260** ip54 surface

CRI ≥ 80 | 220-240 V | DALI 1 ADDR. | IP54 | IK07 | X-PERT

**OPAL | DIRECT** CRI ≥ 80

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 7.0 W | 3000 K | 881 lm | 126 lm/W | 8 7 1 - 8 1 2 6 5 ◆ ◪ O |
| | 4000 K | 933 lm | 133 lm/W | 8 7 1 - 8 1 2 6 6 ◆ ◪ O |







## **SONO LOOP 350** ip54 surface

CRI ≥ 80 | 220-240 V | DALI 1 ADDR. | IP54 | IK07 | X-PERT

**OPAL | DIRECT** CRI ≥ 80

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 15.9 W | 3000 K | 1940 lm | 122 lm/W | 8 7 1 - 8 1 3 6 5 ◆ ◪ O |
| | 4000 K | 2050 lm | 129 lm/W | 8 7 1 - 8 1 3 6 6 ◆ ◪ O |







## **SONO LOOP 450** ip54 surface

CRI ≥ 80 | 220-240 V | DALI 1 ADDR. | IP54 | IK07 | X-PERT

**OPAL | DIRECT** CRI ≥ 80


| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 23.2 W | 3000 K | 2840 lm | 122 lm/W | 8 7 1 - 8 1 4 6 5 ◆ ◪ O |
| | 4000 K | 3010 lm | 130 lm/W | 8 7 1 - 8 1 4 6 6 ◆ ◪ O |




**Order options**

| CONTROL ◆ | | COLOUR ◪ | |
|---|---|---|---|
| non DIM | 1 | pure white RAL 9010 | 7 |
| DALI-2 | 3 | grey aluminium RAL 9007 | D |






## **SONO LOOP 600** ip54 surface

CRI ≥ 80 | 220-240 V | DALI 1 ADDR. | IP54 | X-PERT

**OPAL | DIRECT** CRI ≥ 80

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 42.0 W | 3000 K | 5410 lm | 129 lm/W | 8 7 1 - 8 1 5 6 5 ◆ ◪ O |
| | 4000 K | 5730 lm | 136 lm/W | 8 7 1 - 8 1 5 6 6 ◆ ◪ O |

**Order options**

| CONTROL ◆ | |
|---|---|
| non DIM | 1 |
| DALI-2 | 3 |

| COLOUR ◪ | |
|---|---|
| pure white RAL 9010 | 7 |
| grey aluminium RAL 9007 | D |