


Quickinfo

2700 K, 3000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam), 3 SDCM (initial MacAdam)
bis zu 95 lm/W
L90 / 100000 h, L90 / 50000 h
Casambi, DALI-2, nicht dimmbar
IP20

Types



Farben


Baldachin

Lichtverteilung


TULA suspended

EN Decorative suspended luminaire in aluminium; surface polished chrome or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; good glare reduction due to recessed light point plane; incl. high quality lens system; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy, either recessed or surface mounted version; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

DE Dekorative Pendelleuchte aus Aluminium; Oberfläche chrom poliert oder pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; gute Entblendung durch zurückversetzte Lichtpunktebene; inkl. hochwertiger Linsenoptik; mit COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten, wahlweise als Einbau- oder Anbauvariante; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich




free positioning by ring and hook



track version available

TULA nano suspended

CRI ≥ 90 · 2 SDCM · UGR ≤ 19 · cd/m² ≤ 1500 · III · DALI 1 ADDR.



MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 18 Vf, 500 mA	2700 K	790 lm	89 lm/W	0 4 9 - 5 H 1 0 4 1 ◪ M
	3000 K	816 lm	92 lm/W	0 4 9 - 5 H 1 0 5 1 ◪ M


FLOOD 30°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W, 18 Vf, 500 mA	2700 K	762 lm	86 lm/W	0 4 9 - 5 H 1 0 4 1 ◪ F
	3000 K	787 lm	89 lm/W	0 4 9 - 5 H 1 0 5 1 ◪ F



TULA micro suspended

CRI ≥ 90 · UGR ≤ 10 · cd/m² ≤ 1500 · III · DALI 1 ADDR.




MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W, 18 Vf, 500 mA	2700 K	648 lm	77 lm/W	0 4 9 - 5 H 1 5 4 1 ◪ M
	3000 K	746 lm	88 lm/W	0 4 9 - 5 H 1 5 5 1 ◪ M

FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W, 18 Vf, 500 mA	2700 K	694 lm	82 lm/W	0 4 9 - 5 H 1 5 4 1 ◪ F
	3000 K	798 lm	95 lm/W	0 4 9 - 5 H 1 5 5 1 ◪ F


Mounting accessories (required)



MOUNTING SET trimless for cable suspension for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø·H (mm)	ORDER CODE
traffic white	9-25 mm	75·48	0 0 5 - 3 5 1 1 0 1 7

excl. power supply



MOUNTING SET with trim for cable suspension for ceilings, 2-25 mm

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	77·49	0 0 5 - 3 5 2 1 0 1 7
jet black	77·49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply

Order options

HEIGHT	H
300 mm	5
500 mm	7

COLOUR	◪
chrome	4
traffic white RAL 9016	7
jet black RAL 9005	8
special colours	X

Mounting accessories (optional)



RING ceiling mounted


COLOUR	Ø·H (mm)	ORDER CODE
traffic white	50·88	050-051021 7
jet black	50·88	050-051021 8



HOOK ceiling mounted

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	18·58	050-051031 7
jet black	18·58	050-051031 8

Mounting tools accessories (optional)




SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA

Ø·H (mm)	ORDER CODE
100·107	063-891211 0

necessary to install mounting housing trimless

Electrical accessories (required)



CANOPY for cable suspension 500 mA, 198-264 V AC, PC2


TYPE	EFFICIENCY	Ø·H (mm)	ORDER CODE
13 W | non DIM	η 84 %	115·29	005-260211 1
10 W | DALI-2	η 85 %	115·29	005-260213 1
10 W | Casambi	η 83 %	115·29	005-260219 1

incl. power supply

POWER SUPPLY 500 mA, 10 W, 198-264 V AC, PC2

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
non DIM	η 80 %	65·39·20	002-907 32
DALI-2	η 82 %	147·33·23	002-907 33

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
160 W | PC2	220-240 V AC	η 94 %	72·90·63	005-652021 0

Lifetime >100.000 h @ 120 W, 45°C ambient temp., cascadable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L·W·H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36·88·59	005-612103 0

200 -1050 mA settable const. current | 2×42 W | 48 V DC | U OUT 10–40 V SELV

Order options

COLOUR [1]	
traffic white RAL 9016	7
jet black RAL 9005	8

Optical accessories (optional)



HONEYCOMB LOUVER for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø·H (mm)	ORDER CODE
jet black	42·3	007 - 1965188



OVAL LENS for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø·H (mm)	ORDER CODE
42·7	007 - 1965880



SOFT LENS for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø·H (mm)	ORDER CODE
42·7	007 - 1965980



WALLWASHER LENS for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø·H (mm)	ORDER CODE
42·7	007 - 1965780


Private Residence, Denmark

Dänemark

Architekt
LINK Architecture

Lighting Design
anker & co


Fotograf
Kris Dekeijser

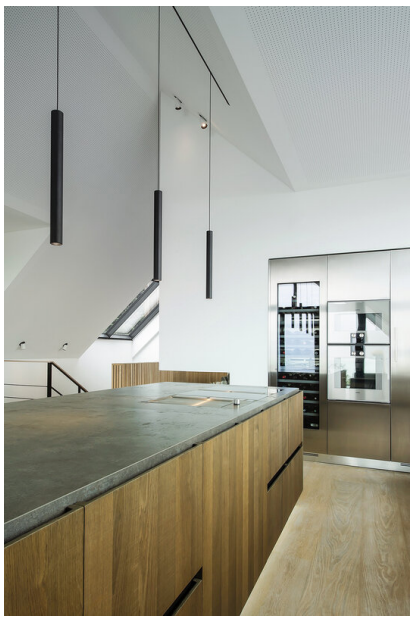

Verwendete Produkte



TULA suspended



MOVE IT 25 trimless system



SPOTLINE MOVE IT 25

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com











Trippenhuis

Niederlande

Architekt
Arpalight

Fotograf
Rene de Wit Max Hart
Nibbrig




Verwendete Produkte



SASSO 60 round semi-recessed



TULA suspended



MOVE IT 25 trimless system



BO 32 / 45 / 55 intrack 1 | 2 | 3 lamps



SASSO 60 round ceiling

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com





