



## ARY suspended


**EN** Decorative suspended luminaire in aluminium; surface powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; or height adjustable U-profile pendant rod suspension (black or white), feed in U-profile; spotlight head either fixed or 265° rotatable and 90° tiltable; good glare reduction due to recessed light point plane; incl. high quality lens system; precise radiation characteristics with different beam angles; shades available as accessory for variant with cable suspension in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

**DE** Dekorative Pendelleuchte aus Aluminium; Oberfläche pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; oder kürzbare U-Profil-Pendelstangenabhängung (schwarz oder weiß), Einspeiseleitung in U-Profil; Strahlerkopf wahlweise starr bzw. 265° dreh- und 90° schwenkbar; gute Entblendung durch zurückversetzte Lichtpunktebene; inkl. hochwertiger Linsenoptik; präzise Abstrahlcharakteristik mit verschiedenen Ausstrahlwinkeln; Shades in den RAL Farben velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white oder signal black für Variante mit Seilabhängung als Zubehör erhältlich; mit COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich

### Quickinfo

2700 K, 3000 K, 4000 K  
 CRI ≥ 90 / 3 SDCM (initial MacAdam)  
 bis zu 94 lm/W  
 L90 / 50000 h  
 Casambi, DALI-2, nicht dimmbar  
 IP20

### Types

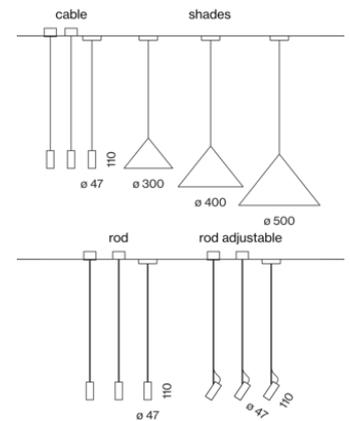

### Farbe




### Baldachin




### Lichtverteilung



265° rotatable,  
90° tiltable




free positioning  
by ring and  
hook



track version  
available




### ARY cable suspended



#### MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 4 1 $\bar{M}$
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 5 1 $\bar{M}$
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 6 1 $\bar{M}$

special colours: cable always in white




#### FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 4 1 $\bar{F}$
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 5 1 $\bar{F}$
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$ 1 1 6 1 $\bar{F}$

special colours: cable always in white




### ARY rod suspended



#### MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 $\bar{0}$ ,2 1 4 1 $\bar{M}$
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ ,2 1 5 1 $\bar{M}$
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ ,2 1 6 1 $\bar{M}$

special colours: rod always in white



#### FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 $\bar{0}$ ,2 1 4 1 $\bar{F}$
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$ ,2 1 5 1 $\bar{F}$
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 $\bar{0}$ ,2 1 6 1 $\bar{F}$

special colours: rod always in white




### ARY adjustable rod suspended



#### MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 $\bar{0}$ ,3 1 4 1 $\bar{M}$
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ ,3 1 5 1 $\bar{M}$
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 $\bar{0}$ ,3 1 6 1 $\bar{M}$

special colours: rod always in white



#### Order options

MOUNTING	$\bar{0}$	MOUNTING	$\bar{0}$ ,1	COLOUR	$\bar{M}$	COLOUR	$\bar{M}$
cable 1500 mm	1	rod 1500 mm	1	special colours	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		


#### COLOUR

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

**FLOOD 44°, CRI ≥ 90**


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 <b>3</b> , 3 1 4 1 <input checked="" type="checkbox"/> F
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 <b>3</b> , 3 1 5 1 <input checked="" type="checkbox"/> F
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 <b>3</b> , 3 1 6 1 <input checked="" type="checkbox"/> F

special colours: rod always in white

**Mounting accessories (required)****MOUNTING SET trimless for cable suspension for plasterboard ceilings**


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	75-48	0 0 5 - 3 5 1 1 0 1 7

excl. power supply

**MOUNTING SET trimless for rod suspension for plasterboard ceilings**


COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	75-48	0 0 5 - 3 5 1 2 0 1 7

excl. power supply

**MOUNTING SET with trim for cable suspension for ceilings, 2-25 mm**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 1 0 1 7
jet black	77-49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply


**MOUNTING SET with trim for rod suspension for ceilings, 2-25 mm**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 2 0 1 7
jet black	77-49	0 0 5 - 3 5 2 2 0 1 8

excl. power supply

**Mounting accessories (optional)****RING ceiling mounted**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	50-88	0 5 0 - 0 5 1 0 2 1 7
jet black	50-88	0 5 0 - 0 5 1 0 2 1 8

**Mounting tools accessories (optional)****SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA**

Ø-H (mm)	ORDER CODE
100-107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless

**Order options**

MOUNTING	1	MOUNTING	1	COLOUR	7	COLOUR	7
cable 1500 mm	1	rod 1500 mm	1	<b>special colours</b>	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		

**COLOUR**

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

### Electrical accessories (required)



#### CANOPY for cable suspension 500 mA, 198-264 V AC, PC2

TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W   non DIM	η 84 %	115-29	0 0 5 - 2 6 0 2 1 1 <a href="#">☑</a>
10 W   DALI-2	η 85 %	115-29	0 0 5 - 2 6 0 2 1 3 <a href="#">☑</a>
10 W   Casambi	η 83 %	115-29	0 0 5 - 2 6 0 2 1 9 <a href="#">☑</a>

incl. power supply



#### CANOPY for rod suspension 500 mA, 198-264 V AC, PC2


TYPE	EFFICIENCY	Ø-H (mm)	ORDER CODE
13 W   non DIM	η 84 %	115-29	0 0 5 - 2 6 0 1 1 1 <a href="#">☑</a>
10 W   DALI-2	η 85 %	115-29	0 0 5 - 2 6 0 1 1 3 <a href="#">☑</a>
10 W   Casambi	η 83 %	115-29	0 0 5 - 2 6 0 1 1 9 <a href="#">☑</a>

incl. power supply

#### POWER SUPPLY 500 mA, 10 W, 198-264 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
non DIM	η 80 %	65-39-20	0 0 2 - 9 0 7 3 2
DALI-2	η 82 %	147-33-23	0 0 2 - 9 0 7 3 3

### Electrical accessories (optional)



#### DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
160 W   PC2	220-240 V AC	η 94 %	72-90-63	0 0 5 - 6 5 2 0 2 1 0


Lifetime &gt;100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

#### DIN RAIL LED DRIVER

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 - 1050 mA settable const. current | 2×42W | 48V DC | U OUT 10–40V SELV

### Optical accessories (optional)



#### SHADE 300

COLOUR	Ø-H (mm)	ORDER CODE
signal black	300-188	0 4 9 - 5 9 3 3 1 1 B
velvet beige	300-188	0 4 9 - 5 9 3 3 1 1 C
woodpecker olive	300-188	0 4 9 - 5 9 3 3 1 1 G
kingfisher grey	300-188	0 4 9 - 5 9 3 3 1 1 L
madeira brown	300-188	0 4 9 - 5 9 3 3 1 1 T
signal white	300-188	0 4 9 - 5 9 3 3 1 1 W


only available for ARY cable suspended

#### Order options

MOUNTING	☒	MOUNTING	☒ <sub>1</sub>	COLOUR	☑	COLOUR	☑
cable 1500 mm	1	rod 1500 mm	1	<a href="#">special colours</a>	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		


#### COLOUR

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

**SHADE 400**

COLOUR	Ø-H (mm)	ORDER CODE
signal black	400-253	0 4 9 - 5 9 3 4 1 1 B
velvet beige	400-253	0 4 9 - 5 9 3 4 1 1 C
woodpecker olive	400-253	0 4 9 - 5 9 3 4 1 1 G
kingfisher grey	400-253	0 4 9 - 5 9 3 4 1 1 L
madeira brown	400-253	0 4 9 - 5 9 3 4 1 1 T
signal white	400-253	0 4 9 - 5 9 3 4 1 1 W

only available for ARY cable suspended

**SHADE 500**

COLOUR	Ø-H (mm)	ORDER CODE
signal black	500-318	0 4 9 - 5 9 3 5 1 1 B
velvet beige	500-318	0 4 9 - 5 9 3 5 1 1 C
woodpecker olive	500-318	0 4 9 - 5 9 3 5 1 1 G
kingfisher grey	500-318	0 4 9 - 5 9 3 5 1 1 L
madeira brown	500-318	0 4 9 - 5 9 3 5 1 1 T
signal white	500-318	0 4 9 - 5 9 3 5 1 1 W

only available for ARY cable suspended

**HONEYCOMB LOUVER** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø-H (mm)	ORDER CODE
jet black	42-3	0 0 7 - 1 9 6 5 1 8 8

**OVAL LENS** for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42-3	0 0 7 - 1 9 6 5 8 8 0

**SOFT LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42-3	0 0 7 - 1 9 6 5 9 8 0

**WALLWASHER LENS** for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø-H (mm)	ORDER CODE
42-3	0 0 7 - 1 9 6 5 7 8 0

**Order options**

MOUNTING	1	MOUNTING	1	COLOUR	X	COLOUR	7
cable 1500 mm	1	rod 1500 mm	1	<a href="#">special colours</a>	X	traffic white RAL 9016	7
cable 2000 mm with hook (one ring included)	2	rod 1500 mm with hook (one ring included)	2	traffic white RAL 9016	7	jet black RAL 9005	8
				jet black RAL 9005	8		

**COLOUR**

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20

# Young Family Apartment, Ukraine

Ukraine

**Architekt**  
YODEZEEN Architects

**Lighting Design**  
Svetlana Osadcha

**Fotograf**  
Andrii Shurpenkov



## Verwendete Produkte



**ARY suspended**



**OPAL HIGH  
PERFORMANCE  
MOVE IT 25**



**MOVE IT 25 surface /  
suspended system**



