


Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
bis zu 94 lm/W
L90 / 50000 h
Casambi, DALI-2, nicht dimmbar
IP20

Types

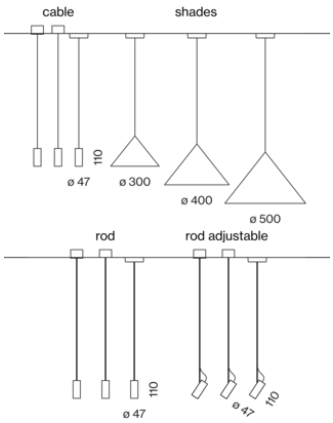

Farben

Baldachin

Lichtverteilung

ARY


suspended

EN Decorative suspended luminaire in aluminium; surface powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; or height adjustable U-profile pendant rod suspension (black or white), feed in U-profile; spotlight head either fixed or 265° rotatable and 90° tiltable; good glare reduction due to recessed light point plane; incl. high quality lens system; precise radiation characteristics with different beam angles; shades available as accessory for variant with cable suspension in RAL colours velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white or signal black; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory


DE Dekorative Pendelleuchte aus Aluminium; Oberfläche pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; oder kürzbare U-Profil-Pendelstangenabhängung (schwarz oder weiß), Einspeiseleitung in U-Profil; Strahlerkopf wahlweise starr bzw. 265° dreh- und 90° schwenkbar; gute Entblendung durch zurückversetzte Lichtpunktebene; inkl. hochwertiger Linsenoptik; präzise Abstrahlcharakteristik mit verschiedenen Ausstrahlwinkeln; Shades in den RAL Farben velvet beige, madeira brown, kingfisher grey, woodpecker olive, signal white oder signal black für Variante mit Seilabhängung als Zubehör erhältlich; mit COB (Chip on Board) Technologie für höchste Effizienz; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich



265° rotatable,
90° tiltable




free positioning by ring and hook



track version available





ARY cable suspended

CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤ 1500 | III | DALI 1 ADDR.

MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 ơ$_1$ 1 1 4 1 ◪ M
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 ơ$_1$ 1 1 5 1 ◪ M
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 ơ$_1$ 1 1 6 1 ◪ M


special colours: cable always in white

FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 ơ$_1$ 1 1 4 1 ◪ F
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 ơ$_1$ 1 1 5 1 ◪ F
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 ơ$_1$ 1 1 6 1 ◪ F

special colours: cable always in white





ARY rod suspended

CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤ 1500 | III | DALI 1 ADDR.

MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 ơ 2 1 4 1 ◪ M
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 ơ 2 1 5 1 ◪ M
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 ơ 2 1 6 1 ◪ M


special colours: rod always in white

FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 ơ 2 1 4 1 ◪ F
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 ơ 2 1 5 1 ◪ F
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 ơ 2 1 6 1 ◪ F

special colours: rod always in white





ARY adjustable rod suspended

90° / 265° | CRI ≥ 90 | III | DALI 1 ADDR.

MEDIUM 25°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	642 lm	76 lm/W	0 4 9 - 5 ơ 3 1 4 1 ◪ M
18 Vf,	3000 K	739 lm	88 lm/W	0 4 9 - 5 ơ 3 1 5 1 ◪ M
500 mA	4000 K	739 lm	88 lm/W	0 4 9 - 5 ơ 3 1 6 1 ◪ M

special colours: rod always in white

Order options

MOUNTING	ơ
rod 1500 mm	1
rod 1500 mm with hook (one ring included)	2

MOUNTING	ơ$_1$
cable 1500 mm	1
cable 2000 mm with hook (one ring included)	2


COLOUR	◪
traffic white RAL 9016	7
jet black RAL 9005	8
special colours	X

FLOOD 44°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.4 W,	2700 K	688 lm	82 lm/W	0 4 9 - 5 ♁ 3 1 4 1 ◪ F
18 Vf,	3000 K	791 lm	94 lm/W	0 4 9 - 5 ♁ 3 1 5 1 ◪ F
500 mA	4000 K	791 lm	94 lm/W	0 4 9 - 5 ♁ 3 1 6 1 ◪ F

special colours: rod always in white


Mounting accessories (required)



MOUNTING SET trimless for cable suspension for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø·H (mm)	ORDER CODE
traffic white	9-25 mm	75·48	0 0 5 - 3 5 1 1 0 1 7


excl. power supply



MOUNTING SET trimless for rod suspension for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø·H (mm)	ORDER CODE
traffic white	9-25 mm	75·48	0 0 5 - 3 5 1 2 0 1 7


excl. power supply



MOUNTING SET with trim for cable suspension for ceilings, 2-25 mm

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	77·49	0 0 5 - 3 5 2 1 0 1 7
jet black	77·49	0 0 5 - 3 5 2 1 0 1 8

excl. power supply



MOUNTING SET with trim for rod suspension for ceilings, 2-25 mm

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	77·49	0 0 5 - 3 5 2 2 0 1 7
jet black	77·49	0 0 5 - 3 5 2 2 0 1 8

excl. power supply


Mounting accessories (optional)



RING ceiling mounted

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	50·88	0 5 0 - 0 5 1 0 2 1 7
jet black	50·88	0 5 0 - 0 5 1 0 2 1 8

Mounting tools accessories (optional)



SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA

Ø·H (mm)	ORDER CODE
100·107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless


Order options

MOUNTING	♁
rod 1500 mm	1
rod 1500 mm with hook (one ring included)	2

COLOUR	◪
traffic white RAL 9016	7
jet black RAL 9005	8
special colours	X

COLOUR	
signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20
kingfisher grey	RAL 230 60 10
madeira brown	RAL 050 40 40
signal white	RAL 9003


Electrical accessories (required)



CANOPY for cable suspension 500 mA, 198-264 V AC, PC2

TYPE	EFFICIENCY	Ø·H (mm)	ORDER CODE
13 W | non DIM	η 84 %	115·29	005-260211 [1]
10 W | DALI-2	η 85 %	115·29	005-260213 [1]
10 W | Casambi	η 83 %	115·29	005-260219 [1]

incl. power supply



CANOPY for rod suspension 500 mA, 198-264 V AC, PC2


TYPE	EFFICIENCY	Ø·H (mm)	ORDER CODE
13 W | non DIM	η 84 %	115·29	005-260111 [1]
10 W | DALI-2	η 85 %	115·29	005-260113 [1]
10 W | Casambi	η 83 %	115·29	005-260119 [1]

incl. power supply

POWER SUPPLY 500 mA, 10 W, 198-264 V AC, PC2

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
non DIM	η 80 %	65·39·20	002-907332
DALI-2	η 82 %	147·33·23	002-907333

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
160 W | PC2	220-240 V AC	η 94 %	72·90·63	005-652021 0


Lifetime >100.000 h @ 120 W, 45°C ambient temp., cascadable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L·W·H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36·88·59	005-612103 0

200 -1050 mA settable const. current | 2×42 W | 48V DC | U OUT 10–40 V SELV

Optical accessories (optional)



SHADE 300


COLOUR	Ø·H (mm)	ORDER CODE
signal black	300·188	049-593311B
velvet beige	300·188	049-593311C
woodpecker olive	300·188	049-593311G
kingfisher grey	300·188	049-593311L
madeira brown	300·188	049-593311T
signal white	300·188	049-593311W

only available for ARY cable suspended

Order options

COLOUR	[1]
traffic white RAL 9016	7
jet black RAL 9005	8


COLOUR	
signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20
kingfisher grey	RAL 230 60 10
madeira brown	RAL 050 40 40
signal white	RAL 9003



SHADE 400

COLOUR	Ø·H (mm)	ORDER CODE
signal black	400·253	049-593411B
velvet beige	400·253	049-593411C
woodpecker olive	400·253	049-593411G
kingfisher grey	400·253	049-593411L
madeira brown	400·253	049-593411T
signal white	400·253	049-593411W

only available for ARY cable suspended



SHADE 500

COLOUR	Ø·H (mm)	ORDER CODE
signal black	500·318	049-593511B
velvet beige	500·318	049-593511C
woodpecker olive	500·318	049-593511G
kingfisher grey	500·318	049-593511L
madeira brown	500·318	049-593511T
signal white	500·318	049-593511W

only available for ARY cable suspended



HONEYCOMB LOUVER for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

COLOUR	Ø·H (mm)	ORDER CODE
jet black	42·3	007-1965188



OVAL LENS for BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø·H (mm)	ORDER CODE
42·7	007-1965880



SOFT LENS for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø·H (mm)	ORDER CODE
42·7	007-1965980



WALLWASHER LENS for ARY | BO 45 | JUST 45 | MOVE IN 45 | TARO 45 | TULA micro

Ø·H (mm)	ORDER CODE
42·7	007-1965780

Order options

COLOUR

signal black	RAL 9004
velvet beige	RAL 085 80 10
woodpecker olive	RAL 100 50 20
kingfisher grey	RAL 230 60 10
madeira brown	RAL 050 40 40
signal white	RAL 9003


Young Family Apartment, Ukraine

Ukraine

Architekt
YODEZEEN Architects

Lighting Design
Svetlana Osadcha

Fotograf
Andrii Shurpenkov

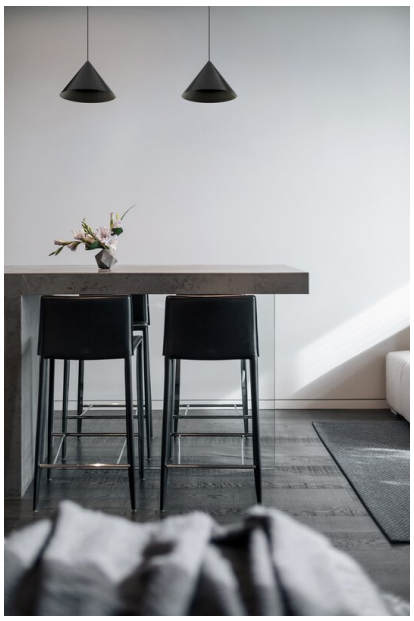

Verwendete Produkte



ARY suspended



MOVE IT 25 surface / suspended system



OPAL MOVE IT 25

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com







