


Quickinfo

3000 K, 4000 K, tunable white
2700 - 6500 K
CRI ≥ 80, CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 13, UGR ≤ 16
bis zu ↓ 5.530 lm / ↑ 7.850 lm
bis zu 163 lm/W
L90 / 75000 h
Abdeckung: Reflector
DALI-2, DALI-2 / DALI-2 ESSENTIAL Sensor, DALI-2 D/I getrennt steuerbar
IP20

Types



Farben



Reflektor



Lichtverteilung





DiiA® standards 251, 252, 253



chrome version available



special end cap & reflector design



DIN EN 12464-1 UGR ≤ 19



system solution



glare-free direct and 170° indirect illumination

SETA


suspended

EN Luminaire housing from extruded aluminium profile, round design; extremely slim design (only ø 61 mm); no visible screws; surface polished chrome or powder coated; pendant fitting with cable suspension; with integrated toolless suspension height adjustment; spring clip attachment to the luminaire; freely positionable; incl. feeder cable; extruded profile for improved thermal management; high gloss reflector with faceted design; direct / indirect light distribution; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, optionally separately controllable; energy-efficient LEDs with very good colour rendering

DE Leuchtenkörper aus Aluminiumstrangpressprofil, runde Ausführung; extrem schlanke Bauform (nur ø 61mm); keine sichtbaren Schrauben; Oberfläche chrom poliert oder pulverbeschichtet; abgependelt mit Seilabhängung; werkzeuglose Höhenverstellung an der Leuchte; Befestigung an der Leuchte mittels Federclips; frei positionierbar; inkl. Einspeiseleitung; Strangpressprofil für verbessertes Thermomanagement; hochglänzender Reflektor mit Facettenoptik; direkt / indirekte Abstrahlcharakteristik; Indirektlichtanteil mit eigenen Platinen und hochwertiger Linsenoptik für maximale, homogene Deckenaufhellung, wahlweise separat steuerbar; energieeffiziente LEDs mit sehr guter Farbwiedergabe

SETA suspended

TUNABLE WHITE | CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤ 1500 | 220-240 V | 1-2 ADDR. | X-PERT | X-PERT | presence | brightness




DIRECT / INDIRECT POWER

SYSTEM	LENGTH	COLOUR TEMP.	CRI ≥	LUM. FLUX	EFFICACY	ORDER CODE
48.0 W	1863 mm	3000 K	80	↧3470/↥3440 lm	144 lm/W	0 7 4 - 5 2 4 6 5
			90	↧3020/↥2970 lm	125 lm/W	0 7 4 - 5 2 4 6 0
		4000 K	80	↧3690/↥3930 lm	159 lm/W	0 7 4 - 5 2 4 6 6
			90	↧3020/↥3210 lm	130 lm/W	0 7 4 - 5 2 4 6 1
51.0 W	1863 mm	↧ 3000 K/ ↥tunable w.	90	↧3200/↥3050 lm	123 lm/W	0 7 4 - 5 2 D 6 0 4
		↧ 4000 K/ ↥tunable w.	90	↧3200/↥3050 lm	123 lm/W	0 7 4 - 5 2 D 6 1 4
		tunable w.	90	↧3320/↥3120 lm	126 lm/W	0 7 4 - 5 2 4 6 D
82.0 W	3063 mm	3000 K	80	↧5200/↥6890 lm	147 lm/W	0 7 4 - 5 2 4 9 5
			90	↧4530/↥5940 lm	128 lm/W	0 7 4 - 5 2 4 9 0
		4000 K	80	↧5530/↥7850 lm	163 lm/W	0 7 4 - 5 2 4 9 6
			90	↧4530/↥6410 lm	133 lm/W	0 7 4 - 5 2 4 9 1
87.0 W	3063 mm	tunable w.	90	↧4980/↥6240 lm	129 lm/W	0 7 4 - 5 2 4 9 D
88.0 W	3063 mm	↧ 3000 K/ ↥tunable w.	90	↧4810/↥6110 lm	124 lm/W	0 7 4 - 5 2 D 9 0 4
		↧ 4000 K/ ↥tunable w.	90	↧4810/↥6110 lm	124 lm/W	0 7 4 - 5 2 D 9 1 4

The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to reflector chrome.

Planning Information

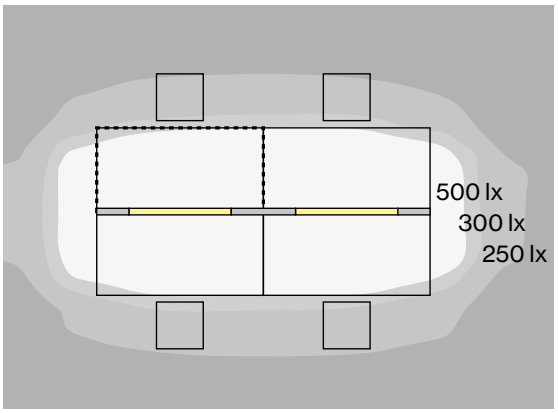



SETA suspended, 86 W, 4000 K direct / indirect power

ROOM VALUES

Room dimensions	5.4 × 4 × 2.8 m
Reflection factor	0.7 | 0.5 | 0.2
Maintenance factor	0.8
Mounting height	2.25 m

CALCULATION SURFACE

Surface dimensions	1.6 × 0.8
Surface height	0.75
Average illuminance (E_m)	> 500 lx
Uniformity (U_0)	> 0.6

GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

UGR transversal	≤ 19
UGR axial	≤ 19

65° < 1500 cd/m²

Order options

CONTROL	
DALI-2	3
DALI-2 D/I separately controllable	4
DALI-2 / DALI-2 ESSENTIAL sensor	7

CONTROL	
DALI-2	3
DALI-2 / DALI-2 ESSENTIAL sensor	7

COLOUR	
chrome	4
pure white RAL 9010	7
jet black RAL 9005	8

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8

REFLECTOR	
dark chrome	B
chrome	R

Creative Lab, Barcelona

Spanien

Lighting Design
MMAS Lighting

Fotograf
Miquel Llonch




Verwendete Produkte



BETO ceiling / suspended system



BETO suspended



SETA suspended

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



















