


## Quickinfo

3000 K
CRI ≥ 80 / 3 SDCM (initial MacAdam)
bis zu 39 lm/W
L80 / 50000 h
nicht dimmbar
IP65, IK08

### Types




### Farben



### Lichtverteilung



# STREAMCUT

wall

EN Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve; ambient temperatures from -20°C to + 50°C; separate luminaire wiring compartment, suitable for through wiring

DE Wandeinbauleuchte aus Aluminium in schlichtem, reduziertem Design; Oberfläche schutzeloxiert und dunkelgrau oder schwarz pulverbeschichtet; teilbedrucktes Sicherheitsglas, fixiert mit Edelstahlschrauben; Reflektor aus matt eloxiertem Reinaluminium mit asymmetrischer Abstrahlcharakteristik; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schutzart IP65, mit Druckausgleichsventil; Umgebungstemperaturen von -20°C bis +50°C; separater Leuchtenanschlussraum, geeignet für Weiterverkabelung




## **STREAMCUT** wall


CRI ≥ 80 | 220-240 V | IP65 | IK 08 | X-PERT | X-PERT

**ASYMMETRIC** CRI ≥ 80, non DIM

| SYSTEM | COLOUR TEMP. | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|
| 7.6 W | 3000 K | 293 lm | 39 lm/W | 088-283151 |





## Planning Information

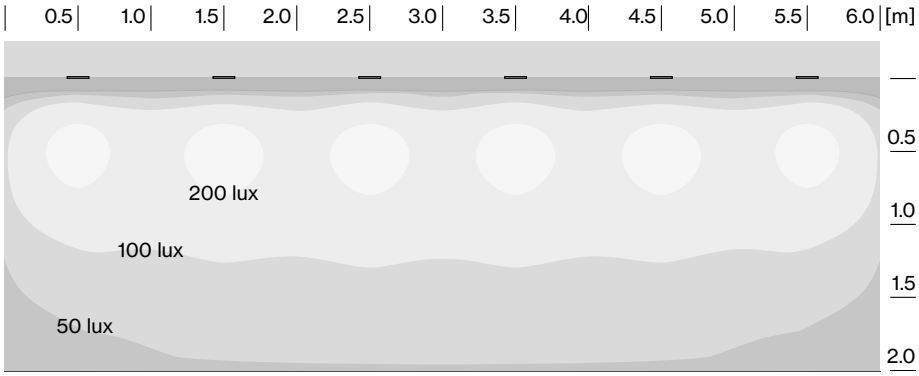


**STREAMCUT** wall (8.4 W, 6 luminaires)
wall mounting height from bottom: 0.8 m / distance between luminaires: 1.0 m

## Mounting accessories




**MOUNTING HOUSING** for concrete and solid walls

| L·W·H (mm) | ORDER CODE |
|---|---|
| 290·100·200 | 088-289111 0 |

## Order options

| COLOUR | |
|---|---|
| jet black RAL 9005 | 8 |
| grey aluminium RAL 9007 | D |