

STREAMCUT

wall

EN Recessed wall luminaire in aluminium in a simple, minimalist design; surface anodised and powder coated in dark grey or black; partially printed safety glass, fixed with stainless steel screws; reflector in matt anodised aluminium with asymmetric radiation characteristic; energy-efficient LEDs with very good colour rendering; degree of protection IP 65, with pressure compensation valve; ambient temperatures from -20°C to + 50°C; separate luminaire wiring compartment, suitable for through wiring

DE Wandinbauleuchte aus Aluminium in schlichtem, reduziertem Design; Oberfläche schutzeloxiert und dunkelgrau oder schwarz pulverbeschichtet; teilbedrucktes Sicherheitsglas, fixiert mit Edelstahlschrauben; Reflektor aus matt eloxiertem Reinaluminium mit asymmetrischer Abstrahlcharakteristik; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schutzart IP 65, mit Druckausgleichsventil; Umgebungstemperaturen von -20°C bis +50°C; separater Leuchtenanschlussraum, geeignet für Weiterverkabelung

Quickinfo

3000 K
CRI \geq 80 / 3 SDCM (initial MacAdam)
bis zu 39 lm/W
L80 / 50000 h
nicht dimmbar
IP65, IK08

Types



Farbe



Lichtverteilung






STREAMCUT wall




ASYMMETRIC CRI ≥ 80, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
7.6 W	3000 K	293 lm	39 lm/W	0 8 8 - 2 8 3 1 5 1 <input checked="" type="checkbox"/>




Planning Information

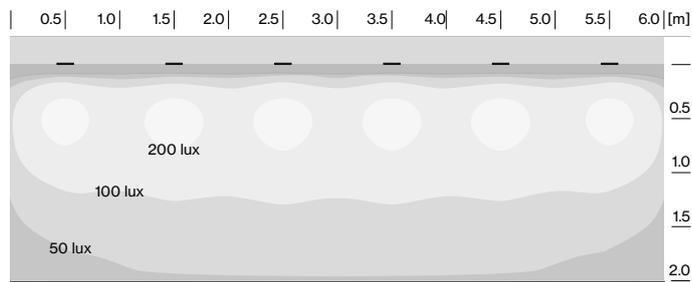

STREAMCUT wall (8.4 W, 6 luminaires)
 wall mounting height from bottom: 0.8 m / distance between luminaires: 1.0 m

Mounting accessories (optional)



MOUNTING HOUSING for concrete and solid walls
 L·W·H (mm)
 290-100-200

ORDER CODE
0 8 8 - 2 8 9 1 1 1 0

Order options

COLOUR	<input checked="" type="checkbox"/>
grey aluminium RAL 9007	D
jet black RAL 9005	8