
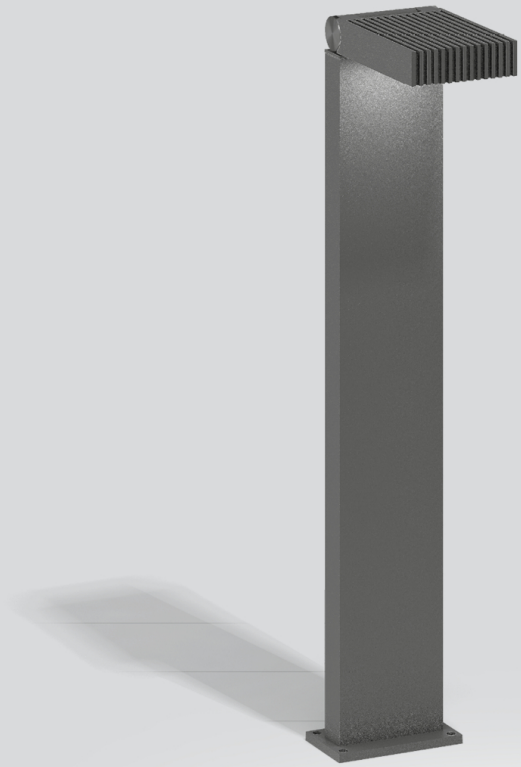


## Quickinfo

3000 K
CRI ≥ 80, CRI ≥ 90 / 3 SDCM (initial MacAdam)
bis zu 87 lm/W
L80 / 50000 h, L90 / 50000 h
nicht dimmbar
IP65, IK07

### Types




### Farben

### Lichtverteilung


# STREAMCUT

bollard

EN Bollard luminaire in aluminium in a simple, minimalist design; luminaire head with integrated cooling fins; +/- 90° tiltable, lockable every 30°; anodised surface and dark grey powder coated; optional mounting on screw-on base or with anchorage unit (available as an accessory); partially printed safety glass, fixed with stainless steel screws; high quality lens system asymmetrical light distribution; energy-efficient LEDs with very good colour rendering; degree of protection IP65, with pressure compensation valve and optional surge protection typ 2 with nominal discharge current 3 kA; ambient temperatures from -20°C to + 50°C; separate luminaire wiring compartment, suitable for through wiring

DE Pollerleuchte aus Aluminium in schlichtem, reduziertem Design; Leuchtenkopf mit integrierten Kühlrippen; +/- 90° schwenkbar und alle 30° fixierbar; Oberfläche schutzeloxiert und dunkelgrau pulverbeschichtet; Montage wahlweise auf Sockel aufgeschraubt oder mit Betonanker (als Zubehör erhältlich); teilbedrucktes Sicherheitsglas, fixiert mit Edelstahlschrauben; hochwertige Linsenoptik mit asymmetrischer Lichtverteilung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schutzart IP65, mit Druckausgleichsventil und optional Überspannungsschutz Typ 2 mit Nennableitstrom 3kA; Umgebungstemperaturen von -20°C bis +50°C; separater Leuchtenanschlussraum, geeignet für Weiterverkabelung






## **STREAMCUT** bollard

180° | CRI ≥ 90 | 220-240 V | IP65 | IK07 | X-PERT


**ASYMMETRIC** grey aluminium, non DIM

| SYSTEM | COLOUR TEMP. | CRI ≥ | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|---|
| 13.5 W | 3000 K | 80 | 1180 lm | 87 lm/W | 088-281151DA |
| 34.0 W | 3000 K | 90 | 2710 lm | 80 lm/W | 088-284151DA |

**ASYMMETRIC | SURGE PROTECTION** grey aluminium, non DIM


| SYSTEM | COLOUR TEMP. | CRI ≥ | LUM. FLUX | EFFICACY | ORDER CODE |
|---|---|---|---|---|---|
| 13.5 W | 3000 K | 80 | 1180 lm | 87 lm/W | 088-281251DA |
| 34.0 W | 3000 K | 90 | 2710 lm | 80 lm/W | 088-284251DA |

## Planning Information

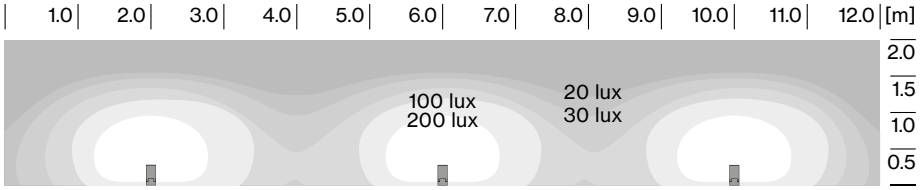


**STREAMCUT** bollard (14 W, 3 luminaires)
distance between luminaires: 4.30 m

## Mounting accessories




**ANCHORAGE UNIT**

| L·W·H (mm) | ORDER CODE |
|---|---|
| 84·32·590 | 088-289311 0 |

## Order options

**COLOUR**
grey aluminium RAL 9007

# Kogel 3, Kaindorf

Österreich

**Architekt**
planconsort ztgmbh
architekten + ingenieure

**Fotograf**
Paul Ott




**Verwendete Produkte**



**STREAMCUT bollard**

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


Kogel 3




Kogel 3

