
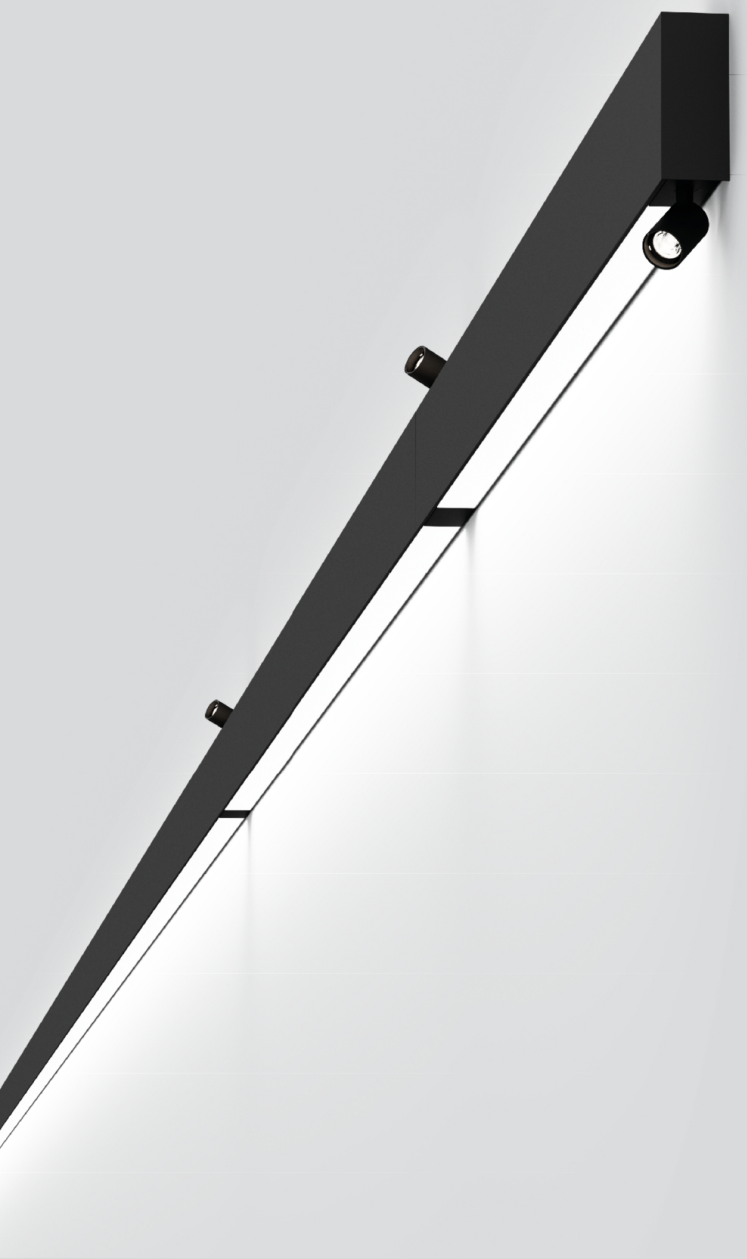


Quickinfo

3000 K, 4000 K, tunable white
2700 - 5000 K
CRI ≥ 90, CRI ≥ 97 / 3 SDCM (initial MacAdam)
bis zu ↓ 4.020 lm/ ↑ 4.780 lm
bis zu 125 lm/W
L85 / 50000 h, L95 / 50000 h
DALI-2, nicht dimmbar
Opal, Opal / Asymmetric
IP20 / SK1 / 220-240 V
306 mm, 606 mm, 633 mm, 637 mm, 706 mm, 1.206 mm, 1.306 mm, 2.406 mm, 2.506 mm,

Types



Lichtverteilung




LINEA

system

EN Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; designed for continuous lighting systems, 90° angle connectors for flexible system design; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; opal cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed

DE Leuchtenkörper und Frontabdeckung aus Aluminiumstrangpressprofil, kantige Ausführung; keine sichtbaren Schrauben; ausgelegt für durchgehende Lichtsysteme, 90° Winkelverbinder für flexiblen Systemaufbau; Oberfläche pulverbeschichtet; geeignet für Wandmontage; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige direkt/indirekte Lichtverteilung; opale Abdeckung für homogene Ausleuchtung; oder mit speziell berechneter, asymmetrischer Linse für homogene Beleuchtungsstärken (Montage wahlweise zur Boden- oder Deckenaufhellung); energieeffiziente LEDs mit sehr guter Farbwiedergabe; wahlweise JUST 26 Strahlereinsatz einsetzbar




CRI ≥ 98
XPECTRUM
(optional)



LINEA wall system

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	306 mm	3000 K	↧428/↥509 lm	105 lm/W	0 5 8 - 6 1 4 1 5 ◆ ◪ A A
		4000 K	↧472/↥562 lm	116 lm/W	0 5 8 - 6 1 4 1 6 ◆ ◪ A A
17.6 W	606 mm	3000 K	↧881/↥1050 lm	110 lm/W	0 5 8 - 6 1 4 2 5 ◆ ◪ A A
		4000 K	↧972/↥1160 lm	121 lm/W	0 5 8 - 6 1 4 2 6 ◆ ◪ A A
34.0 W	1206 mm	3000 K	↧1760/↥2090 lm	113 lm/W	0 5 8 - 6 1 4 4 5 ◆ ◪ A A
		4000 K	↧1940/↥2310 lm	125 lm/W	0 5 8 - 6 1 4 4 6 ◆ ◪ A A
37.0 W	1206 mm	tunable w.	↧2010/↥2390 lm	119 lm/W	0 5 8 - 6 1 4 4 D 3 ◪ A A
68.0 W	2406 mm	3000 K	↧3520/↥4190 lm	113 lm/W	0 5 8 - 6 1 4 8 5 ◆ ◪ A A
		4000 K	↧3890/↥4620 lm	125 lm/W	0 5 8 - 6 1 4 8 6 ◆ ◪ A A
71.0 W	2406 mm	tunable w.	↧4020/↥4780 lm	124 lm/W	0 5 8 - 6 1 4 8 D 3 ◪ A A


OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
8.9 W	306 mm	3000 K	↧428/↥428 lm	96 lm/W	0 5 8 - 6 1 4 1 5 ◆ ◪ A H
		4000 K	↧472/↥472 lm	106 lm/W	0 5 8 - 6 1 4 1 6 ◆ ◪ A H
17.6 W	606 mm	3000 K	↧881/↥881 lm	100 lm/W	0 5 8 - 6 1 4 2 5 ◆ ◪ A H
		4000 K	↧972/↥972 lm	110 lm/W	0 5 8 - 6 1 4 2 6 ◆ ◪ A H
34.0 W	1206 mm	3000 K	↧1760/↥1760 lm	104 lm/W	0 5 8 - 6 1 4 4 5 ◆ ◪ A H
		4000 K	↧1940/↥1940 lm	114 lm/W	0 5 8 - 6 1 4 4 6 ◆ ◪ A H
37.0 W	1206 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	0 5 8 - 6 1 4 4 D 3 ◪ A H
68.0 W	2406 mm	3000 K	↧3520/↥3520 lm	104 lm/W	0 5 8 - 6 1 4 8 5 ◆ ◪ A H
		4000 K	↧3890/↥3890 lm	114 lm/W	0 5 8 - 6 1 4 8 6 ◆ ◪ A H
71.0 W	2406 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	0 5 8 - 6 1 4 8 D 3 ◪ A H



LINEA inner corner wall system

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	633 mm	3000 K	↧1760/↥2090 lm	113 lm/W	0 5 8 - 6 1 1 1 5 ◆ ◪ A A
		4000 K	↧1940/↥2310 lm	125 lm/W	0 5 8 - 6 1 1 1 6 ◆ ◪ A A
37.0 W	633 mm	tunable w.	↧2010/↥2390 lm	119 lm/W	0 5 8 - 6 1 1 1 D 3 ◪ A A

OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	633 mm	3000 K	↧1760/↥1760 lm	104 lm/W	0 5 8 - 6 1 1 1 5 ◆ ◪ A H
		4000 K	↧1940/↥1940 lm	114 lm/W	0 5 8 - 6 1 1 1 6 ◆ ◪ A H
37.0 W	633 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	0 5 8 - 6 1 1 1 D 3 ◪ A H


Order options

CONTROL ◆		COLOUR ◪	
non DIM	1	pure white RAL 9010	7
DALI-2	3	jet black RAL 9005	8



LINEA outer corner wall system

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT



OPAL / ASYMMETRIC CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	637 mm	3000 K	↧1760/↥2090 lm	113 lm/W	058-611125 ◪ AA
		4000 K	↧1940/↥2310 lm	125 lm/W	058-611126 ◪ AA
37.0 W	637 mm	tunable w.	↧2010/↥2390 lm	119 lm/W	058-61112D3 ◪ AA


OPAL / OPAL CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
34.0 W	637 mm	3000 K	↧1760/↥1760 lm	104 lm/W	058-611125 ◪ AH
		4000 K	↧1940/↥1940 lm	114 lm/W	058-611126 ◪ AH
37.0 W	637 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	058-61112D3 ◪ AH



LINEA 1 spotlight wall system

TUNABLE WHITE | CRI ≥ 90 | 220-240 V | 1 ADDR. | X-PERT | X-PERT




OPAL / OPAL | 1 SPOTLIGHT 30°, CRI ≥ 90

SYSTEM	LENGTH	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.6 W	706 mm	3000 K	↧881/↥881 lm	100 lm/W	058-614125 ◪ ⥀ H
		4000 K	↧972/↥972 lm	110 lm/W	058-614126 ◪ ⥀ H
34.0 W	1306 mm	3000 K	↧1760/↥1760 lm	104 lm/W	058-614445 ◪ ⥀ H
		4000 K	↧1940/↥1940 lm	114 lm/W	058-614446 ◪ ⥀ H
37.0 W	1306 mm	tunable w.	↧2010/↥2010 lm	109 lm/W	058-6144D3 ◪ ⥀ H
68.0 W	2506 mm	3000 K	↧3520/↥3520 lm	104 lm/W	058-614885 ◪ ⥀ H
		4000 K	↧3890/↥3890 lm	114 lm/W	058-614886 ◪ ⥀ H
71.0 W	2506 mm	tunable w.	↧4020/↥4020 lm	113 lm/W	058-6148D3 ◪ ⥀ H

spotlight 1 x 2,6 W / 159 lm only with 3000 K

Mounting accessories



END CAPS 1 pair

L·W·H (mm)	ORDER CODE
40·100·12	050-254010 ◪



LINEAR CONNECTOR

TYPE	L·W (mm)	ORDER CODE
1 piece	60·38	050-255100
10 pieces	60·38	050-255100 · 10

Order options

CONTROL ⇳		COLOUR ◪		MOUNTING ⥀	
non DIM	1	pure white RAL 9010	7	spotlight left	B
DALI-2	3	jet black RAL 9005	8	spotlight right	C

Electrical accessories

THROUGH WIRE

TYPE	ORDER CODE
3×1.5mm² | 10 pieces | non DIM	004-90003
5×1.5mm² | 10 pieces | DALI-2	004-90005