


Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
bis zu 48 lm/W
L80 / 50000 h, L90 / 50000 h
DALI-2, nicht dimmbar
IP20

Types

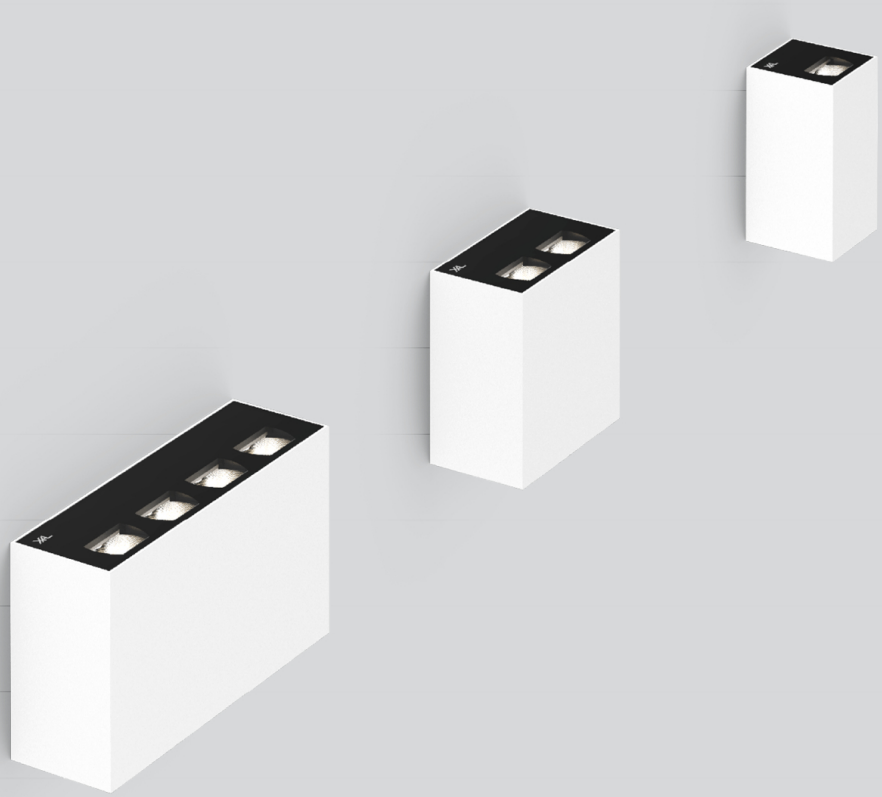

Farben

Lichtverteilung

UNICO wall

surface

EN Rectangular wall surface mounted multi-uplight made of aluminium; equipped with one light inset (1 LAMP) / two (2 LAMPS) / four (4 LAMPS) light insets; luminaire housing can be attached to mounting plate without tools by interlock; converter integrated into luminaire housing; surface powder coated; high-quality reflector with micro-faceted, aluminum-vaporised surface; homogeneous wall or ceiling illumination through uniform light distribution; energy-efficient high power LEDs with very good colour rendering; luminaire for through wiring


DE Rechteckiger Wandanbau-Multi-Uplight aus Aluminium; bestückt mit einem Lichteinsatz (1 LAMP) / zwei (2 LAMPS) / vier (4 LAMPS) Lichteinsätzen; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; Konverter im Leuchtenkörper integriert; Oberfläche pulverbeschichtet; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe; Leuchte für Weiterverdrahtung



homogeneous ceiling illumination




saftey glass for dust protection



UNICO wall 1 lamp surface







WIDE FLOOR CRI ≥ 90, non DIM

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
5.8 W	2700 K	220 lm	38 lm/W	0 9 0 - 0 L 1 4 1 T ◪ 0 0 1
	3000 K	235 lm	41 lm/W	0 9 0 - 0 L 1 5 1 T ◪ 0 0 1
	4000 K	244 lm	42 lm/W	0 9 0 - 0 L 1 6 1 T ◪ 0 0 1



UNICO wall 2 lamps surface







WIDE FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.3 W	2700 K	650 lm	38 lm/W	0 9 0 - 0 L 2 4 ⬍ T ◪ 0 0 1
	3000 K	693 lm	40 lm/W	0 9 0 - 0 L 2 5 ⬍ T ◪ 0 0 1
	4000 K	744 lm	43 lm/W	0 9 0 - 0 L 2 6 ⬍ T ◪ 0 0 1



UNICO wall 4 lamps surface





WIDE FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
29.1 W	2700 K	1230 lm	42 lm/W	0 9 0 - 0 L 4 4 ⬍ T ◪ 0 0 1
	3000 K	1310 lm	45 lm/W	0 9 0 - 0 L 4 5 ⬍ T ◪ 0 0 1
	4000 K	1410 lm	48 lm/W	0 9 0 - 0 L 4 6 ⬍ T ◪ 0 0 1

Order options

CONTROL ⬍	
non DIM	1
DALI-2	3

COLOUR ◪	
jet black RAL 9005	B
white aluminium RAL 9006	G
traffic white RAL 9016	W