

UNICO wall

recessed


EN Recessed wall luminaire in aluminium; installation without tools in mounting set (trimless or with trim) with ball catch system; installation possible in different housings; surface powder coated; incl. external converter; high-quality reflector with micro-faceted, aluminum-vaporised surface; different asymmetrical light distributions; installation optionally for floor or ceiling illumination; energy-efficient high power LEDs with very good colour rendering

DE Wandeinbauleuchte aus Aluminium; werkzeuglose Montage im Montageset (randlos oder mit umlaufendem Rand) durch Kugelschnappsystem; Einbau in unterschiedlichen Gehäusen möglich; Oberfläche pulverbeschichtet; inkl. externem Konverter; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; unterschiedliche asymmetrische Lichtverteilungen; Montage wahlweise zur Boden- oder Deckenaufhellung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe

Quickinfo

2700 K, 3000 K, 4000 K
 CRI ≥ 90 / 3 SDCM (initial MacAdam)
 bis zu 62 lm/W
 L80 / 50000 h, L90 / 50000 h
 DALI-2, nicht dimmbar
 IP20

Types



Farbe



Montage Set




Lichtverteilung




homogeneous floor illumination




safety glass for dust protection



tunable white 2700 – 5000 K (optional)





UNICO wall 1 lamp recessed



WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
9.0 W	2700 K	492 lm	55 lm/W	0 9 0 - 6 L 1 4 ⇄ UB 0 0 1
	3000 K	524 lm	58 lm/W	0 9 0 - 6 L 1 5 ⇄ UB 0 0 1
	4000 K	562 lm	62 lm/W	0 9 0 - 6 L 1 6 ⇄ UB 0 0 1




UNICO wall 2 lamps recessed




WIDE FLOOR jet black, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
17.3 W	2700 K	934 lm	54 lm/W	0 9 0 - 6 L 2 4 ⇄ UB 0 0 1
	3000 K	995 lm	58 lm/W	0 9 0 - 6 L 2 5 ⇄ UB 0 0 1
	4000 K	1070 lm	62 lm/W	0 9 0 - 6 L 2 6 ⇄ UB 0 0 1




Planning Information

wide floor

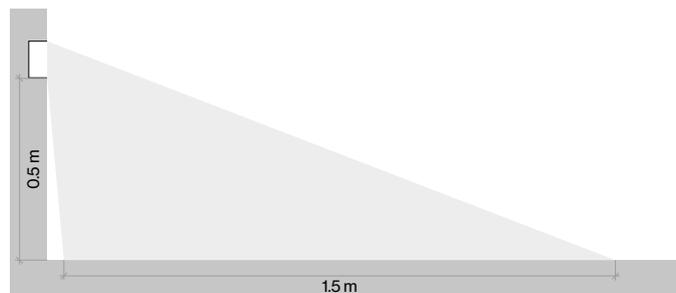

Mounting accessories (required)



MOUNTING SET trimless for plasterboard ceilings 12.5/15/20/25 mm

L·W·H (mm)

85·47·47

for UNICO L2 and UNICO wall recessed 1 lamp

ORDER CODE

0 9 0 - 7 L 2 0 1 0 0

Order options

CONTROL

non DIM

DALI-2



COLOUR

1


jet black

3

traffic white

RAL 9005

RAL 9016

**MOUNTING SET trimless** for plasterboard ceilings 12.5/15/20/25 mm**L-W-H (mm)**

85-85-47

ORDER CODE

0 9 0 - 7 Q 4 0 1 0 0

for UNICO Q4 | UNICO wall recessed 2 lamps

**MOUNTING SET with trim** for intermediate ceilings, 2-25 mm**COLOUR**

jet black

L-W-H (mm)

101-63-30

ORDER CODE

0 9 0 - 7 L 2 0 2 0 B

traffic white

101-63-30

0 9 0 - 7 L 2 0 2 0 W

for UNICO L2 and UNICO wall recessed 1 lamp

**MOUNTING SET with trim** for intermediate ceilings, 2-25 mm**COLOUR**

jet black

L-W-H (mm)

101-101-30

ORDER CODE


0 9 0 - 7 Q 4 0 2 0 B

traffic white

101-101-30

0 9 0 - 7 Q 4 0 2 0 W

for UNICO Q4 | UNICO wall recessed 2 lamps

Mounting accessories (optional)**PRIMED CONCRETE MOUNTING HOUSING****L-W-H (mm)**

240-400-130

ORDER CODE

0 5 2 - 1 9 1 4 3 2 0

order mounting set separately

Order options

CONTROL	◆
non DIM	1
DALI-2	3