


Quickinfo

3000 K, 4000 K
CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 13, UGR ≤ 19
bis zu ↓ 8.760 lm / ↑ 18.600 lm
bis zu 129 lm/W
L90 / 50000 h
eigenständiger ESSENTIAL Sensor, touch DIM an Stange
Microprismatic
IP20

Types

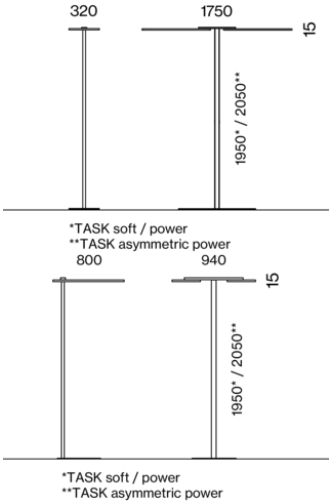

Farben



Lichtverteilung



TASK

free standing double

EN Free standing luminaire with two rectangular luminaire head made of aluminium and rounded edges; luminaire heads arranged either parallel or linear; ultra low-profile design (only 15 mm); rectangular downpipe; pedestal with recess for table base; surface powder coated; direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed up and down by laser engraving; optional: indirect component with special PCBs for increased luminous flux; optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug


DE Stehleuchte mit zwei rechteckigen Leuchtenköpfen aus Aluminium und abgerundeten Kanten; Leuchtenköpfe wahlweise parallel oder linear angeordnet; extrem flache Bauform (nur 15 mm); Standrohr rechteckig; Standfuß mit Ausnehmung für Tischfuß; Oberfläche pulverbeschichtet; direkt/indirekte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach oben und unten gelenkt; optional: Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom; optional: Indirektlichtanteil mit eigenen, schräg gerichteten Platinen für asymmetrische Abstrahlcharakteristik; absolut homogene Ausleuchtung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schalter im Standrohr verbaut; inkl. Anschlussleitung (3m) mit Schutzkontaktstecker




SENSE sensor on request


lighting control by touch DIM on pole


tunable white 2700 – 6500 K (optional)


CRI ≥ 98 XPECTRUM (optional)





*TASK soft / power
**TASK asymmetric power

TASK free standing double

CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤3000 | 220-240 V | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT SOFT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
143.0 W	3000 K	↧8210/↥6690 lm	104 lm/W	X059-29630 ◆ Z
	4000 K	↧8760/↥7140 lm	111 lm/W	X059-29631 ◆ Z


DIRECT / INDIRECT POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
161.0 W	3000 K	↧4800/↥14700 lm	121 lm/W	X059-29620 ◆ Z
	4000 K	↧5110/↥15600 lm	129 lm/W	X059-29621 ◆ Z

DIRECT / INDIRECT ASYMMETRIC POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
188.0 W	3000 K	↧3810/↥17300 lm	112 lm/W	X059-29610 ◆ Z
	4000 K	↧4050/↥18600 lm	120 lm/W	X059-29611 ◆ Z





*TASK soft / power
**TASK asymmetric power

TASK free standing double long

CRI ≥ 90 | UGR ≤ 10 | cd/m² ≤3000 | 220-240 V | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT SOFT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
143.0 W	3000 K	↧8210/↥6690 lm	104 lm/W	X059-29030 ◆ Z
	4000 K	↧8760/↥7140 lm	111 lm/W	X059-29031 ◆ Z

DIRECT / INDIRECT POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
161.0 W	3000 K	↧4800/↥14700 lm	121 lm/W	X059-29020 ◆ Z
	4000 K	↧5110/↥15600 lm	129 lm/W	X059-29021 ◆ Z

DIRECT / INDIRECT ASYMMETRIC POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
188.0 W	3000 K	↧3810/↥17300 lm	112 lm/W	X059-29010 ◆ Z
	4000 K	↧4050/↥18600 lm	120 lm/W	X059-29011 ◆ Z

Order options

CONTROL ◆	
touch DIM on pole	5
stand alone ESSENTIAL sensor	7

COLOUR ◪	
white aluminium RAL 9006	6
pure white RAL 9010	7
jet black RAL 9005	8