



TASK

free standing double


EN Free standing luminaire with two rectangular luminaire head made of aluminium and rounded edges; luminaire heads arranged either parallel or linear; ultra low-profile design (only 15mm); rectangular downpipe; pedestal with recess for table base; surface powder coated; direct/indirect light distribution by LGP body (Light Guiding Prism); side coupled light, directed up and down by laser engraving; optional: indirect component with special PCBs for increased luminous flux; optional: indirect component with special, inclined PCBs for asymmetric radiation characteristic; completely homogeneous illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; incl. connection cable (3m) with safety plug

DE Stehleuchte mit zwei rechteckigen Leuchtenköpfen aus Aluminium und abgerundeten Kanten; Leuchtenköpfe wahlweise parallel oder linear angeordnet; extrem flache Bauform (nur 15mm); Standrohr rechteckig; Standfuß mit Ausnehmung für Tischfuß; Oberfläche pulverbeschichtet; direkt/indirekte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach oben und unten gelenkt; optional: Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom; optional: Indirektlichtanteil mit eigenen, schräg gerichteten Platinen für asymmetrische Abstrahlcharakteristik; absolut homogene Ausleuchtung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schalter im Standrohr verbaut; inkl. Anschlussleitung (3m) mit Schutzkontaktstecker

Quickinfo

3000 K, 4000 K
 CRI ≥ 90 / 3 SDCM (initial MacAdam)
 UGR ≤ 10 , UGR ≤ 13 , UGR ≤ 19
 bis zu $\downarrow 8.760 \text{ lm}$ / $\uparrow 18.600 \text{ lm}$
 bis zu 129 lm/W
 L90 / 50000 h
 eigenständiger ESSENTIAL Sensor, touch DIM an Stange
 Microprismatic
 IP20

Types

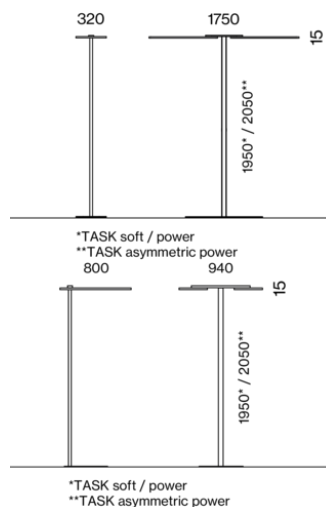

Farben



Lichtverteilung




SENSE sensor on request




lighting control by touch DIM on pole




tunable white 2700 – 6500 K (optional)



CRI ≥ 98 XPECTRUM (optional)



TASK free standing double



DIRECT / INDIRECT SOFT CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
143.0 W	3000 K	↓8210/±16690 lm	104 lm/W	X 0 5 9 - 2 9 6 3 0 ◆ Z
	4000 K	↓8760/±17140 lm	111 lm/W	X 0 5 9 - 2 9 6 3 1 ◆ Z

DIRECT / INDIRECT POWER CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
161.0 W	3000 K	↓4800/±14700 lm	121 lm/W	X 0 5 9 - 2 9 6 2 0 ◆ Z
	4000 K	↓5110/±15600 lm	129 lm/W	X 0 5 9 - 2 9 6 2 1 ◆ Z

DIRECT / INDIRECT ASYMMETRIC POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
188.0 W	3000 K	↓3810/±17300 lm	112 lm/W	X 0 5 9 - 2 9 6 1 0 ◆ Z
	4000 K	↓4050/±18600 lm	120 lm/W	X 0 5 9 - 2 9 6 1 1 ◆ Z



TASK free standing double long



DIRECT / INDIRECT SOFT CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
143.0 W	3000 K	↓8210/±16690 lm	104 lm/W	X 0 5 9 - 2 9 0 3 0 ◆ Z
	4000 K	↓8760/±17140 lm	111 lm/W	X 0 5 9 - 2 9 0 3 1 ◆ Z

DIRECT / INDIRECT POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
161.0 W	3000 K	↓4800/±14700 lm	121 lm/W	X 0 5 9 - 2 9 0 2 0 ◆ Z
	4000 K	↓5110/±15600 lm	129 lm/W	X 0 5 9 - 2 9 0 2 1 ◆ Z

DIRECT / INDIRECT ASYMMETRIC POWER CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
188.0 W	3000 K	↓3810/±17300 lm	112 lm/W	X 0 5 9 - 2 9 0 1 0 ◆ Z
	4000 K	↓4050/±18600 lm	120 lm/W	X 0 5 9 - 2 9 0 1 1 ◆ Z

Order options

CONTROL		COLOUR	
touch DIM on pole	5	white aluminium RAL 9006	6
stand alone ESSENTIAL sensor	7	pure white RAL 9010	7
		jet black RAL 9005	8