
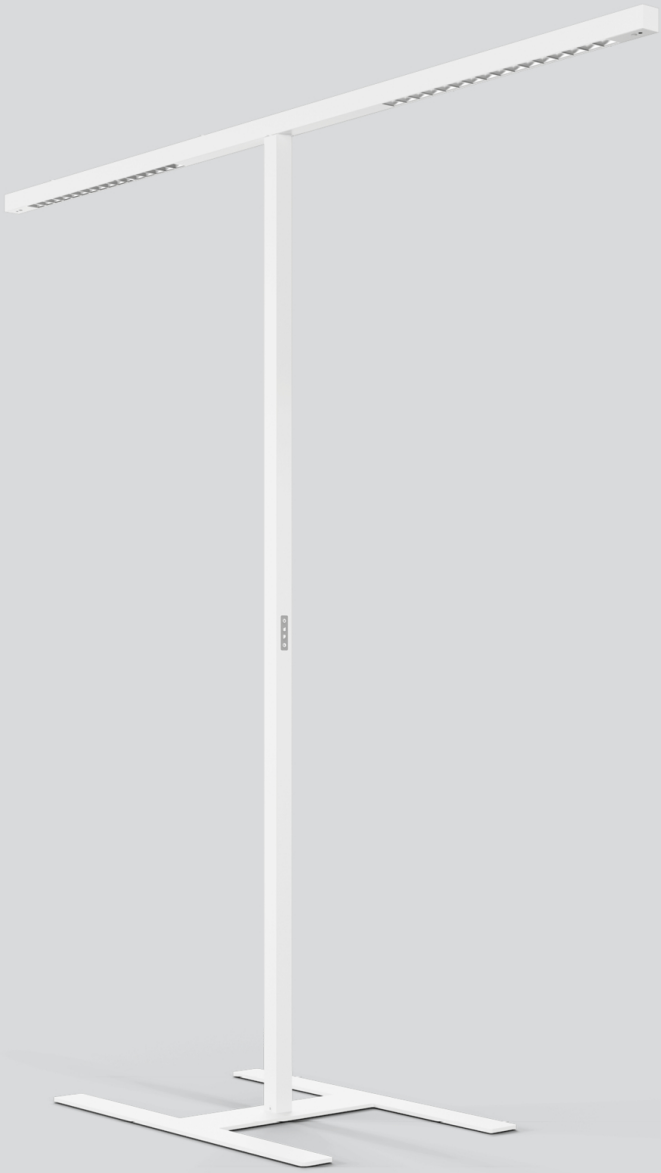


Quickinfo

3000 K, 4000 K
CRI ≥ 80, CRI ≥ 90 / 3 SDCM (initial MacAdam)
UGR ≤ 16, UGR ≤ 19
bis zu ↓ 4.600 lm / ↑ 15.100 lm
bis zu 150 lm/W
L90 / 75000 h
eigenständiger ESSENTIAL Sensor, touch DIM an Stange
Reflector
IP20

Types



Farben

Reflektor

Lichtverteilung

BETO


free standing double

EN Free standing luminaire from extruded aluminium profile in angular design; two separate luminaire heads; extremely slim design (only 42 x 42 mm); square downpipe; pedestal with recess for table base; surface powder coated; direct / indirect light distribution; direct light component with high gloss reflector + faceted design and asymmetric radiation characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination; energy-efficient LEDs with very good colour rendering; switch installed in the downpipe; presence sensor detection range ø4.5m on the floor (variant brightness & presence sensor); incl. connection cable (3m) with safety plug

DE Stehleuchte aus Aluminiumstrangpressprofil in kantiger Ausführung; zwei getrennte Leuchtenköpfe; extrem schlanke Bauform (nur 42 x 42 mm); Standrohr quadratisch; Standfuß mit Ausnehmung für Tischfuß; Oberfläche pulverbeschichtet; direkt / indirekte Abstrahlcharakteristik; Direktlichtanteil mit hochglänzendem Reflektor + Facettenoptik und asymmetrischer Abstrahlcharakteristik; Indirektlichtanteil mit eigenen Platinen und hochwertiger Linsenoptik für maximale, homogene Deckenaufhellung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Schalter im Standrohr verbaut; Anwesenheitssensor-Erfassungsbereich ø4,5m am Fußboden (Variante brightness & presence sensor); inkl. Anschlussleitung (3m) mit Schutzkontaktstecker




lighting control by touch DIM on pole



asymmetric illumination




SENSE sensor on request



CRI ≥ 98 XPECTRUM (optional)





BETO free standing double

CRI ≥90 | UGR ≤16 | 220-240 V | X-PERT | X-PERT | presence | brightness

DIRECT / INDIRECT

SYSTEM	COLOUR TEMP.	CRI ≥	REFLECTOR	LUM. FLUX	EFFICACY	ORDER CODE
103.0 W	3000 K	80	chrome	↧3830/↥10100 lm	135 lm/W	X074-694005 R
			dark chr.	↧2820/↥10100 lm	125 lm/W	X074-694005 B
		90	chrome	↧3330/↥8680 lm	117 lm/W	X074-694000 R
			dark chr.	↧2460/↥8680 lm	108 lm/W	X074-694000 B
	4000 K	80	chrome	↧4060/↥11400 lm	150 lm/W	X074-694006 R
			dark chr.	↧3000/↥11400 lm	140 lm/W	X074-694006 B
		90	chrome	↧3330/↥9370 lm	123 lm/W	X074-694001 R
			dark chr.	↧2460/↥9370 lm	115 lm/W	X074-694001 B

DIRECT / INDIRECT POWER

SYSTEM	COLOUR TEMP.	CRI ≥	REFLECTOR	LUM. FLUX	EFFICACY	ORDER CODE
132.0 W	3000 K	80	chrome	↧4340/↥13300 lm	134 lm/W	X074-695005 R
			dark chr.	↧3200/↥13300 lm	125 lm/W	X074-695005 B
		90	chrome	↧3780/↥11500 lm	116 lm/W	X074-695000 R
			dark chr.	↧2790/↥11500 lm	108 lm/W	X074-695000 B
	4000 K	80	chrome	↧4600/↥15100 lm	149 lm/W	X074-695006 R
			dark chr.	↧3400/↥15100 lm	140 lm/W	X074-695006 B
		90	chrome	↧3780/↥12400 lm	123 lm/W	X074-695001 R
			dark chr.	↧2790/↥12400 lm	115 lm/W	X074-695001 B

Order options

CONTROL	
touch DIM on pole	1
stand alone ESSENTIAL sensor	7

COLOUR	
pure white RAL 9010	7
jet black RAL 9005	8