



FINA SUPPORT spotlight

standing system


EN Miniature rectangular lamp made of aluminium; angular design; surface lacquered; plug and play electrical connector system for toolless mounting; different mechanical and electrical poles available; for flexible system design; fitted with LED light points; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; light inset rotatable; energy-efficient LEDs with very good colour rendering; converter plug and play; converter separately available

DE Miniatur Bügelleuchte aus Aluminium; kanti-ge Bauform; Oberfläche lackiert; durchkontak-tiertes elektrisches Stecksystem für werkzeug-lose Montage; unterschiedliche mechanische und elektrische Poles verfügbar; für flexiblen Systemaufbau; bestückt mit LED Lichtpunkten; präzise Abstrahlcharakteristik mit unterschied-lichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; Lichtein-satz drehbar; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Konverter steckerfertig vorkonfektioniert; Konverter ist separat zu be-stellen

Quickinfo

3000 K, 3500 K, 4000 K
CRI $\geq$ 95 / 3 SDCM (initial
MacAdam)
bis zu 88 lm/W
L80 / 50000 h
exkl. Treiber
IP20

Types

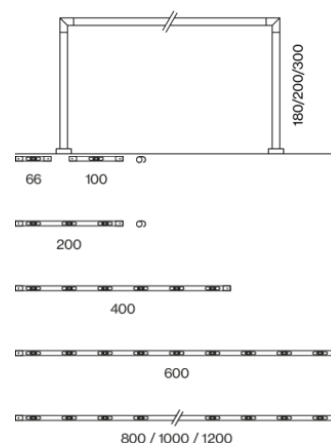

Farben



Lichtverteilung



CRI $\geq$ 95, R9 $\geq$ 90



seamless
design




360° tiltable



brilliance effect



FINA SUPPORT spotline standing system



MEDIUM 32°x46°, CRI ≥ 95, excl. driver

FIXTURE	LENGTH	LUM. FLUX	ORDER CODE
1.4 W	66 mm	97 lm	0 1 1 - 0 2 0 0 :: 1 ■ M
	100 mm	97 lm	0 1 1 - 0 2 0 1 :: 1 ■ M
4.1 W	200 mm	239 lm	0 1 1 - 0 2 0 2 :: 1 ■ M
	260 mm	239 lm	0 1 1 - 0 2 9 A F :: 1 ■ M
	320 mm	239 lm	0 1 1 - 0 2 9 A H :: 1 ■ M
	380 mm	239 lm	0 1 1 - 0 2 9 A J :: 1 ■ M
8.1 W	400 mm	478 lm	0 1 1 - 0 2 0 3 :: 1 ■ M
	460 mm	478 lm	0 1 1 - 0 2 9 A L :: 1 ■ M
	520 mm	478 lm	0 1 1 - 0 2 9 A N :: 1 ■ M
	580 mm	478 lm	0 1 1 - 0 2 9 A P :: 1 ■ M
12.2 W	600 mm	717 lm	0 1 1 - 0 2 0 4 :: 1 ■ M
	660 mm	717 lm	0 1 1 - 0 2 9 A R :: 1 ■ M
	720 mm	717 lm	0 1 1 - 0 2 9 A T :: 1 ■ M
	780 mm	717 lm	0 1 1 - 0 2 9 A U :: 1 ■ M
16.2 W	800 mm	956 lm	0 1 1 - 0 2 0 5 :: 1 ■ M
	860 mm	956 lm	0 1 1 - 0 2 9 A X :: 1 ■ M
	920 mm	956 lm	0 1 1 - 0 2 9 A Z :: 1 ■ M
	980 mm	956 lm	0 1 1 - 0 2 9 B A :: 1 ■ M
20.3 W	1000 mm	1190 lm	0 1 1 - 0 2 0 6 :: 1 ■ M
	1060 mm	1190 lm	0 1 1 - 0 2 9 B C :: 1 ■ M
	1120 mm	1190 lm	0 1 1 - 0 2 9 B E :: 1 ■ M
	1180 mm	1190 lm	0 1 1 - 0 2 9 B F :: 1 ■ M
24.3 W	1200 mm	1430 lm	0 1 1 - 0 2 0 7 :: 1 ■ M

The data values for the luminous flux of fraction may differ for specific order options by -10%. Luminous flux value refers to colour temperature 4000 K. Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions; 66mm and 100mm only available as non DIM version

ASYMMETRIC CRI ≥ 95, excl. driver

FIXTURE	LENGTH	LUM. FLUX	ORDER CODE
1.4 W	66 mm	86 lm	0 1 1 - 0 2 0 0 :: 1 ■ A
	100 mm	86 lm	0 1 1 - 0 2 0 1 :: 1 ■ A
4.1 W	200 mm	211 lm	0 1 1 - 0 2 0 2 :: 1 ■ A
	260 mm	211 lm	0 1 1 - 0 2 9 A F :: 1 ■ A
	320 mm	211 lm	0 1 1 - 0 2 9 A H :: 1 ■ A
	380 mm	211 lm	0 1 1 - 0 2 9 A J :: 1 ■ A
8.1 W	400 mm	422 lm	0 1 1 - 0 2 0 3 :: 1 ■ A
	460 mm	422 lm	0 1 1 - 0 2 9 A L :: 1 ■ A
	520 mm	422 lm	0 1 1 - 0 2 9 A N :: 1 ■ A
	580 mm	422 lm	0 1 1 - 0 2 9 A P :: 1 ■ A
12.2 W	600 mm	634 lm	0 1 1 - 0 2 0 4 :: 1 ■ A
	660 mm	634 lm	0 1 1 - 0 2 9 A R :: 1 ■ A
	720 mm	634 lm	0 1 1 - 0 2 9 A T :: 1 ■ A
	780 mm	634 lm	0 1 1 - 0 2 9 A U :: 1 ■ A
16.2 W	800 mm	845 lm	0 1 1 - 0 2 0 5 :: 1 ■ A
	860 mm	845 lm	0 1 1 - 0 2 9 A X :: 1 ■ A
	920 mm	845 lm	0 1 1 - 0 2 9 A Z :: 1 ■ A
	980 mm	845 lm	0 1 1 - 0 2 9 B A :: 1 ■ A

Order options


WIDTH	W	WIDTH	W	COLOUR TEMPERATURE	::	COLOUR	■
20 mm	1	95 mm	7	3000 K	0	white aluminium RAL 9006	6
35 mm	4	100 mm	8	4000 K	1	tar black RAL 9021	8
50 mm	5			3500 K	2		
85 mm	6						

FIXTURE	LENGTH	LUM. FLUX	ORDER CODE
20.3 W	1000 mm	1060 lm	0 1 1 - 0 2 0 6 :: 1 ☒ A
	1060 mm	1060 lm	0 1 1 - 0 2 9 B C :: 1 ☒ A
	1120 mm	1060 lm	0 1 1 - 0 2 9 B E :: 1 ☒ A
	1180 mm	1060 lm	0 1 1 - 0 2 9 B F :: 1 ☒ A
24.3 W	1200 mm	1270 lm	0 1 1 - 0 2 0 7 :: 1 ☒ A

The data values for the luminous flux may differ for specific order options by -10%. Luminous flux value refers to colour temperature 4000 K. Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions; 66mm and 100mm only available as non DIM version



FINA SUPPORT spotlight 30° standing system



MEDIUM 32°x46°, CRI ≥ 95, excl. driver

FIXTURE	LENGTH	LUM. FLUX	ORDER CODE
1.4 W	66 mm	97 lm	0 1 1 - 0 3 0 0 :: 1 ☒ M
	100 mm	97 lm	0 1 1 - 0 3 0 1 :: 1 ☒ M
4.1 W	200 mm	239 lm	0 1 1 - 0 3 0 2 :: 1 ☒ M
	260 mm	239 lm	0 1 1 - 0 3 9 A F :: 1 ☒ M
	320 mm	239 lm	0 1 1 - 0 3 9 A H :: 1 ☒ M
	380 mm	239 lm	0 1 1 - 0 3 9 A J :: 1 ☒ M
8.1 W	400 mm	478 lm	0 1 1 - 0 3 0 3 :: 1 ☒ M
	460 mm	478 lm	0 1 1 - 0 3 9 A L :: 1 ☒ M
	520 mm	478 lm	0 1 1 - 0 3 9 A N :: 1 ☒ M
	580 mm	478 lm	0 1 1 - 0 3 9 A P :: 1 ☒ M
12.2 W	600 mm	717 lm	0 1 1 - 0 3 0 4 :: 1 ☒ M
	660 mm	717 lm	0 1 1 - 0 3 9 A R :: 1 ☒ M
	720 mm	717 lm	0 1 1 - 0 3 9 A T :: 1 ☒ M
	780 mm	717 lm	0 1 1 - 0 3 9 A U :: 1 ☒ M
16.2 W	800 mm	956 lm	0 1 1 - 0 3 0 5 :: 1 ☒ M
	860 mm	956 lm	0 1 1 - 0 3 9 A X :: 1 ☒ M
	920 mm	956 lm	0 1 1 - 0 3 9 A Z :: 1 ☒ M
	980 mm	956 lm	0 1 1 - 0 3 9 B A :: 1 ☒ M
20.3 W	1000 mm	1190 lm	0 1 1 - 0 3 0 6 :: 1 ☒ M
	1060 mm	1190 lm	0 1 1 - 0 3 9 B C :: 1 ☒ M
	1120 mm	1190 lm	0 1 1 - 0 3 9 B E :: 1 ☒ M
	1180 mm	1190 lm	0 1 1 - 0 3 9 B F :: 1 ☒ M
24.3 W	1200 mm	1430 lm	0 1 1 - 0 3 0 7 :: 1 ☒ M

The data values for the luminous flux of fraction may differ for specific order options by -10%. Luminous flux value refers to colour temperature 4000 K. Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions; 66mm and 100mm only available as non DIM version


Order options

WIDTH	W	WIDTH	W	COLOUR TEMPERATURE	::	COLOUR	☒
20 mm	1	95 mm	7	3000 K	0	white aluminium RAL 9006	6
35 mm	4	100 mm	8	4000 K	1	tar black RAL 9021	8
50 mm	5			3500 K	2		
85 mm	6						

ASYMMETRIC CRI ≥ 95, excl. driver


FIXTURE	LENGTH	LUM. FLUX	ORDER CODE
1.4 W	66 mm	86 lm	0 1 1 - 0 3 0 0 :: 1 ☒ A
	100 mm	86 lm	0 1 1 - 0 3 0 1 :: 1 ☒ A
4.1 W	200 mm	211 lm	0 1 1 - 0 3 0 2 :: 1 ☒ A
	260 mm	211 lm	0 1 1 - 0 3 9 A F :: 1 ☒ A
	320 mm	211 lm	0 1 1 - 0 3 9 A H :: 1 ☒ A
	380 mm	211 lm	0 1 1 - 0 3 9 A J :: 1 ☒ A
	400 mm	422 lm	0 1 1 - 0 3 0 3 :: 1 ☒ A
8.1 W	460 mm	422 lm	0 1 1 - 0 3 9 A L :: 1 ☒ A
	520 mm	422 lm	0 1 1 - 0 3 9 A N :: 1 ☒ A
	580 mm	422 lm	0 1 1 - 0 3 9 A P :: 1 ☒ A
	600 mm	634 lm	0 1 1 - 0 3 0 4 :: 1 ☒ A
12.2 W	660 mm	634 lm	0 1 1 - 0 3 9 A R :: 1 ☒ A
	720 mm	634 lm	0 1 1 - 0 3 9 A T :: 1 ☒ A
	780 mm	634 lm	0 1 1 - 0 3 9 A U :: 1 ☒ A
	800 mm	845 lm	0 1 1 - 0 3 0 5 :: 1 ☒ A
16.2 W	860 mm	845 lm	0 1 1 - 0 3 9 A X :: 1 ☒ A
	920 mm	845 lm	0 1 1 - 0 3 9 A Z :: 1 ☒ A
	980 mm	845 lm	0 1 1 - 0 3 9 B A :: 1 ☒ A
	1000 mm	1060 lm	0 1 1 - 0 3 0 6 :: 1 ☒ A
20.3 W	1060 mm	1060 lm	0 1 1 - 0 3 9 B C :: 1 ☒ A
	1120 mm	1060 lm	0 1 1 - 0 3 9 B E :: 1 ☒ A
	1180 mm	1060 lm	0 1 1 - 0 3 9 B F :: 1 ☒ A
	1200 mm	1270 lm	0 1 1 - 0 3 0 7 :: 1 ☒ A

The data values for the luminous flux may differ for specific order options by -10%. Luminous flux value refers to colour temperature 4000 K. Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions; 66mm and 100mm only available as non DIM version

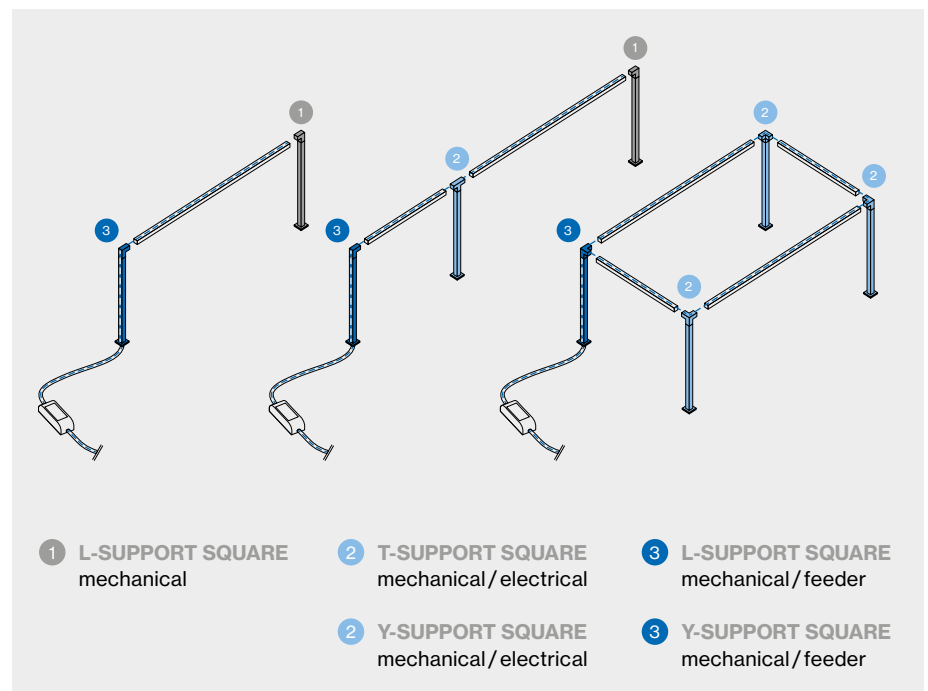Planning Information**Order options**

WIDTH	W	WIDTH	W	COLOUR TEMPERATURE	::	COLOUR	☒
20 mm	1	95 mm	7	3000 K	0	white aluminium RAL 9006	6
35 mm	4	100 mm	8	4000 K	1	tar black RAL 9021	8
50 mm	5			3500 K	2		
85 mm	6						

Electrical mounting accessories (optional)




CONNECTION CABLE

TYPE

1 × open / 1 × DC plug

ORDER CODE

0 1 1 - 9 2 2 2 6 2 0



EXTENSION CABLE 1 × socket / 1 × plug, 350 mA

feeder length

1000 mm

2000 mm

4000 mm

ORDER CODE

0 1 1 - 9 2 2 2 1 2 0

0 1 1 - 9 2 2 2 1 4 0

0 1 1 - 9 2 2 2 1 8 0


FLEX CONNECTOR 0-83° electrical

L-W (mm)

33-6

ORDER CODE

0 1 1 - 9 2 2 5 4 0 0



MOUNTING POLE L mechanical / feeder

COLOUR

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

tar black

white aluminium

L-W (mm)

180-20

180-20

200-20

200-20

300-20

300-20

180-35

180-35

200-35

200-35

300-35

300-35

180-50

180-50

200-50

200-50

300-50

300-50

180-85

180-85

200-85

200-85

300-85

300-85

180-95

180-95

200-95

200-95

300-95

300-95

180-100

180-100

200-100

ORDER CODE

0 1 1 - 9 1 2 1 1 3 6

0 1 1 - 9 1 2 1 1 3 8

0 1 1 - 9 1 2 1 2 3 6

0 1 1 - 9 1 2 1 2 3 8

0 1 1 - 9 1 2 1 3 3 6

0 1 1 - 9 1 2 1 3 3 8

0 1 1 - 9 1 2 4 1 3 6

0 1 1 - 9 1 2 4 1 3 8

0 1 1 - 9 1 2 4 2 3 6

0 1 1 - 9 1 2 4 2 3 8

0 1 1 - 9 1 2 4 3 3 6

0 1 1 - 9 1 2 4 3 3 8

0 1 1 - 9 1 2 5 1 3 6

0 1 1 - 9 1 2 5 1 3 8

0 1 1 - 9 1 2 5 2 3 6

0 1 1 - 9 1 2 5 2 3 8

0 1 1 - 9 1 2 5 3 3 6

0 1 1 - 9 1 2 5 3 3 8

0 1 1 - 9 1 2 6 1 3 6

0 1 1 - 9 1 2 6 1 3 8

0 1 1 - 9 1 2 6 2 3 6

0 1 1 - 9 1 2 6 2 3 8

0 1 1 - 9 1 2 6 3 3 6

0 1 1 - 9 1 2 6 3 3 8

0 1 1 - 9 1 2 7 1 3 6

0 1 1 - 9 1 2 7 1 3 8

0 1 1 - 9 1 2 7 2 3 6

0 1 1 - 9 1 2 7 2 3 8

0 1 1 - 9 1 2 7 3 3 6

0 1 1 - 9 1 2 7 3 3 8

0 1 1 - 9 1 2 8 1 3 6


0 1 1 - 9 1 2 8 1 3 8

0 1 1 - 9 1 2 8 2 3 6

Order options


WIDTH	W	WIDTH	W	COLOUR TEMPERATURE	⚙	COLOUR	☑
20 mm	1	95 mm	7	3000 K	0	white aluminium RAL 9006	6
35 mm	4	100 mm	8	4000 K	1	tar black RAL 9021	8
50 mm	5			3500 K	2		
85 mm	6						

COLOUR	L-W (mm)	ORDER CODE
tar black	200-100	0 1 1 - 9 1 2 8 2 3 8
white aluminium	300-100	0 1 1 - 9 1 2 8 3 3 6
tar black	300-100	0 1 1 - 9 1 2 8 3 3 8




MOUNTING POLE T mechanical / electrical

L-W (mm)	ORDER CODE
180-31	0 1 1 - 9 1 2 2 1 2 ☒
200-31	0 1 1 - 9 1 2 2 2 2 ☒
300-31	0 1 1 - 9 1 2 2 3 2 ☒



MOUNTING POLE Y mechanical / electrical

L-W (mm)	ORDER CODE
180-24	0 1 1 - 9 1 2 3 1 2 ☒
200-24	0 1 1 - 9 1 2 3 2 2 ☒
300-24	0 1 1 - 9 1 2 3 3 2 ☒



MOUNTING POLE Y mechanical / feeder

L-W (mm)	ORDER CODE
180-24	0 1 1 - 9 1 2 3 1 3 ☒
200-24	0 1 1 - 9 1 2 3 2 3 ☒
300-24	0 1 1 - 9 1 2 3 3 3 ☒

Mounting accessories (optional)



MOUNTING POLE L mechanical

L (mm)	ORDER CODE
180	0 1 1 - 9 1 2 W 1 1 ☒
200	0 1 1 - 9 1 2 W 2 1 ☒
300	0 1 1 - 9 1 2 W 3 1 ☒

Electrical accessories (optional)

POWER SUPPLY 24V EU PC2

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
18 W non DIM	198-264 V AC	η 86 %	130-43-30	0 1 1 - 9 2 1 2 1 1 0
35 W non DIM	198-264 V AC	η 86 %	195-43-30	0 1 1 - 9 2 1 2 2 1 0
100 W non DIM	198-264 V AC	η 92 %	220-43-30	0 1 1 - 9 2 1 2 3 1 0
18 W DALI-2	198-264 V AC	η 84 %	130-43-30	0 1 1 - 9 2 1 2 1 3 0
35 W DALI-2	198-264 V AC	η 89 %	195-43-30	0 1 1 - 9 2 1 2 2 3 0
60 W DALI-2	198-240 V AC	η 93 %	220-43-30	0 1 1 - 9 2 1 2 3 3 0

incl. power cable 2m + connection cable with plug 1m

POWER SUPPLY 24V UL non DIM, 100-305 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
25 W	η 88 %	147-40-32	0 1 1 - 9 2 7 2 1 1 0
40 W	η 88 %	147-40-32	0 1 1 - 9 2 7 2 2 1 0
60 W	η 87 %	176-45-32	0 1 1 - 9 2 7 2 3 1 0

Order options

WIDTH	W	WIDTH	W	COLOUR TEMPERATURE	⚡	COLOUR	☒
20 mm	1	95 mm	7	3000 K	0	white aluminium RAL 9006	6
35 mm	4	100 mm	8	4000 K	1	tar black RAL 9021	8
50 mm	5			3500 K	2		
85 mm	6						

POWER SUPPLY 24V UL incl. metalbox non DIM, 100-305 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
25 W	η 88 %	196-68-45	0 1 1 - 9 2 9 2 1 1 0
40 W	η 88 %	196-68-45	0 1 1 - 9 2 9 2 2 1 0
60 W	η 87 %	223-66-55	0 1 1 - 9 2 9 2 3 1 0

SYSTEM SPLITTER

TYPE	ORDER CODE
3 way	0 1 1 - 9 2 3 8 3 0 0
6 way	0 1 1 - 9 2 3 8 6 0 0

Order options

WIDTH	W	WIDTH	W	COLOUR TEMPERATURE	⚡	COLOUR	📏
20 mm	1	95 mm	7	3000 K	0	white aluminium RAL 9006	6
35 mm	4	100 mm	8	4000 K	1	tar black RAL 9021	8
50 mm	5			3500 K	2		
85 mm	6						

Pole overview



L-SUPPORT standing

EN Arranged linearly along the showcase table, FINA support System, electrically and mechanically connected via the L-Support Poles, ensures excellent illumination of the products or exhibits without restricting the view.

DE Lineare angeordnet entlang des Vitrinen Tisches sorgt FINA support System, elektrisch und mechanisch über die L-Support Pole verbunden, für eine hervorragende Ausleuchtung der Ware oder Exponate, ohne den Blick darauf einzuschränken.



T-SUPPORT standing

EN The T-Support Pole of the FINA support system is primarily used for large display case when several light insets are combined and arranged in a row. The T-Support poles are used to connect them together electrically and mechanically.

DE Die T-Support Pole des FINA support Systems findet vor allem bei großen Vitrinenflächen ihren Einsatz, wenn mehrere Lichteinsätze kombiniert und aneinandergereiht werden. Mittels der T-Support Pole werden diese elektrisch und mechanisch miteinander verbunden.



Y-SUPPORT standing

EN The Y-connectors of the FINA support system enable ideal illumination of the entire display case by allowing different insets to be mechanically and electrically connected to each other, even via corners.

DE Die Y-Connectors des FINA support Systems ermöglichen eine ideale Ausleuchtung der gesamten Vitrine, indem unterschiedliche Insets auch über Ecken miteinander mechanisch und elektrisch verbunden werden können.